SONY

HD COLOR CAMERA

HDC-700
HDC-750

HD CAMERA ADAPTOR

HDCA-750

1st Edition Revised 1 (3-190-702-02)

Section 1 Spare Parts
Section 4 Board Layouts
Section 5 Schematic Diagrams

HDC-700/750 (SY)
HDCA-750 (SY) J
9-967-683-03

Sony Corporation
Broadcast Products Company

Printed in Japan
1997. 3 08
© 1996
Published by Broadcast Products Company

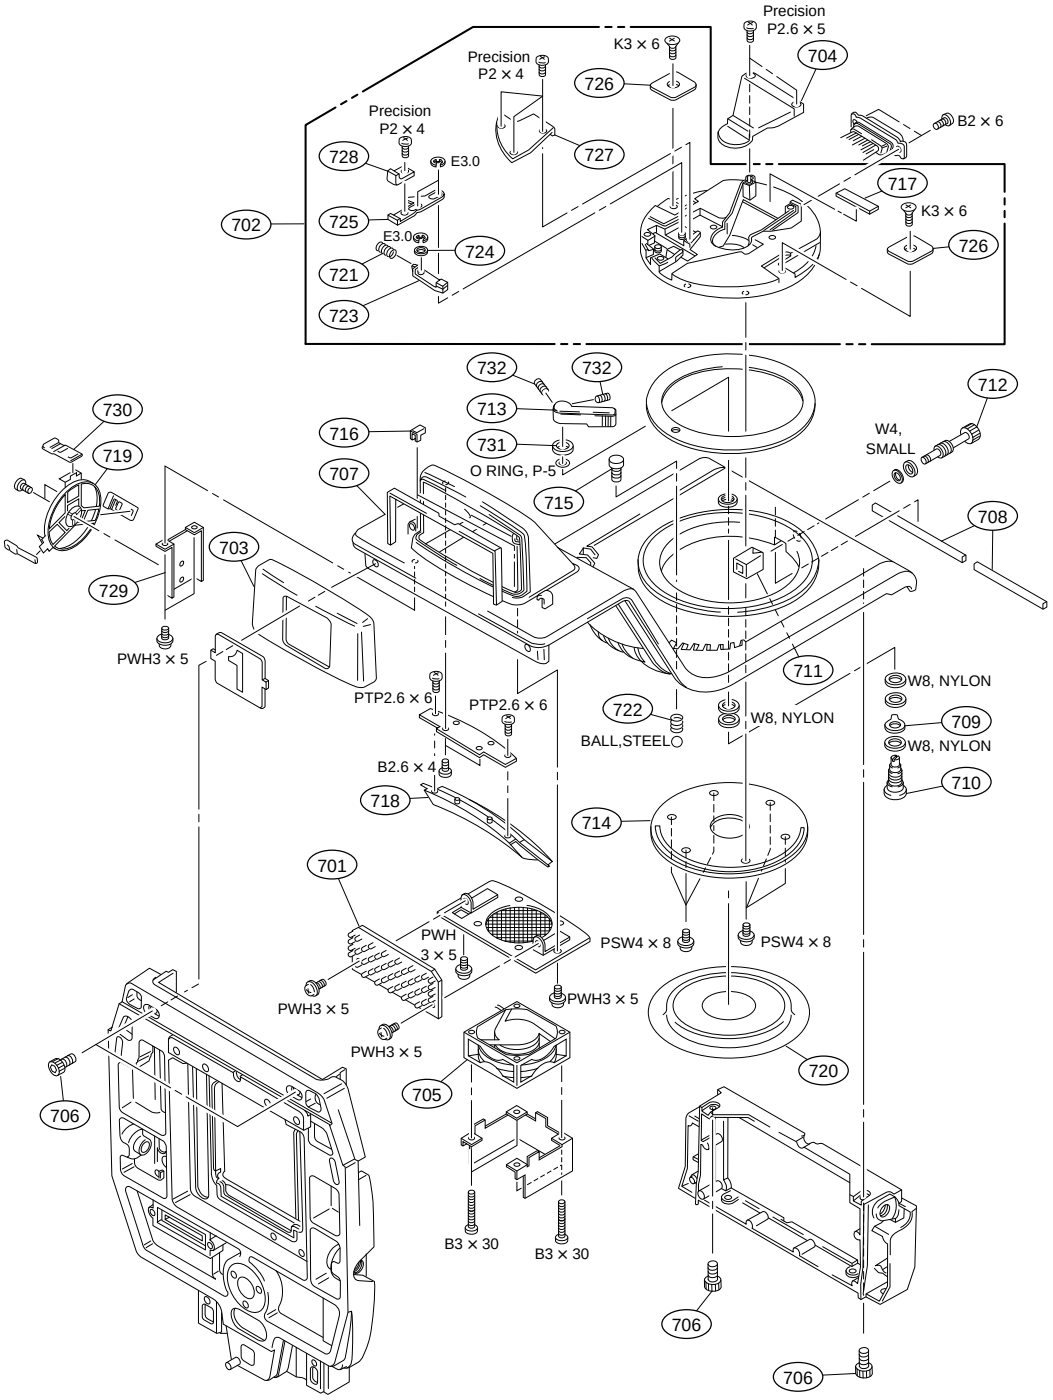

No.	Part No.	SP	Description
701	A-8273-190-A	o	MOUNTED CIRCUIT BOARD, LE-172
702	A-8314-047-A	o	PANNING ASSY
703	X-3167-561-1	s	COVER ASSY, TARY
704	X-3167-699-2	o	GUARD ASSY, HARNESS
705	1-698-977-11	s	FAN
706	2-391-520-21	s	BOLT (M5X12), HOLE, HEXAGON
707	3-185-866-02	o	CUSHION, DROP PROTECTION
708	3-185-869-01	s	SHIELD, SOFT
709	3-185-881-01	o	PLATE, LOCK PAN
710	3-185-882-02	o	LOCK, PAN
711	3-185-884-01	o	FRICTION
712	3-185-885-01	o	SCREW, PAN FRICTION
713	3-185-886-02	o	LEVER, PAN LOCK
714	3-185-933-02	o	RING, PAN BASE
715	3-186-806-01	s	SCREW, LID
716	3-187-630-01	o	CUSHION,(SMALL)DROP PROTECTION
717	3-187-655-01	o	CUSHION, D SUB
718	3-603-281-01	o	DUCT
719	3-603-400-01	o	REEL
720	3-603-813-01	o	COVER,CABLE
721	3-634-355-00	s	SPRING
722	3-641-622-00	s	SPRING, COMPRESSION
723	3-692-327-03	o	PIN (JOINT)
724	3-692-328-01	o	SPACER (JOINT)
725	3-692-329-02	o	LEVER (A) (JOINT)
726	3-692-332-01	o	PLATE (A)
727	3-692-365-02	o	PLATE, BLIND
728	3-692-370-01	o	COVER, LEVER (A)
729	3-697-898-01	o	REEL BRACKET
730	3-697-899-01	o	CLAMP BAND
731	3-701-444-11	s	WASHER, 6
732	3-701-510-00	s	SET SCREW, DOUBLE POINT 4X4

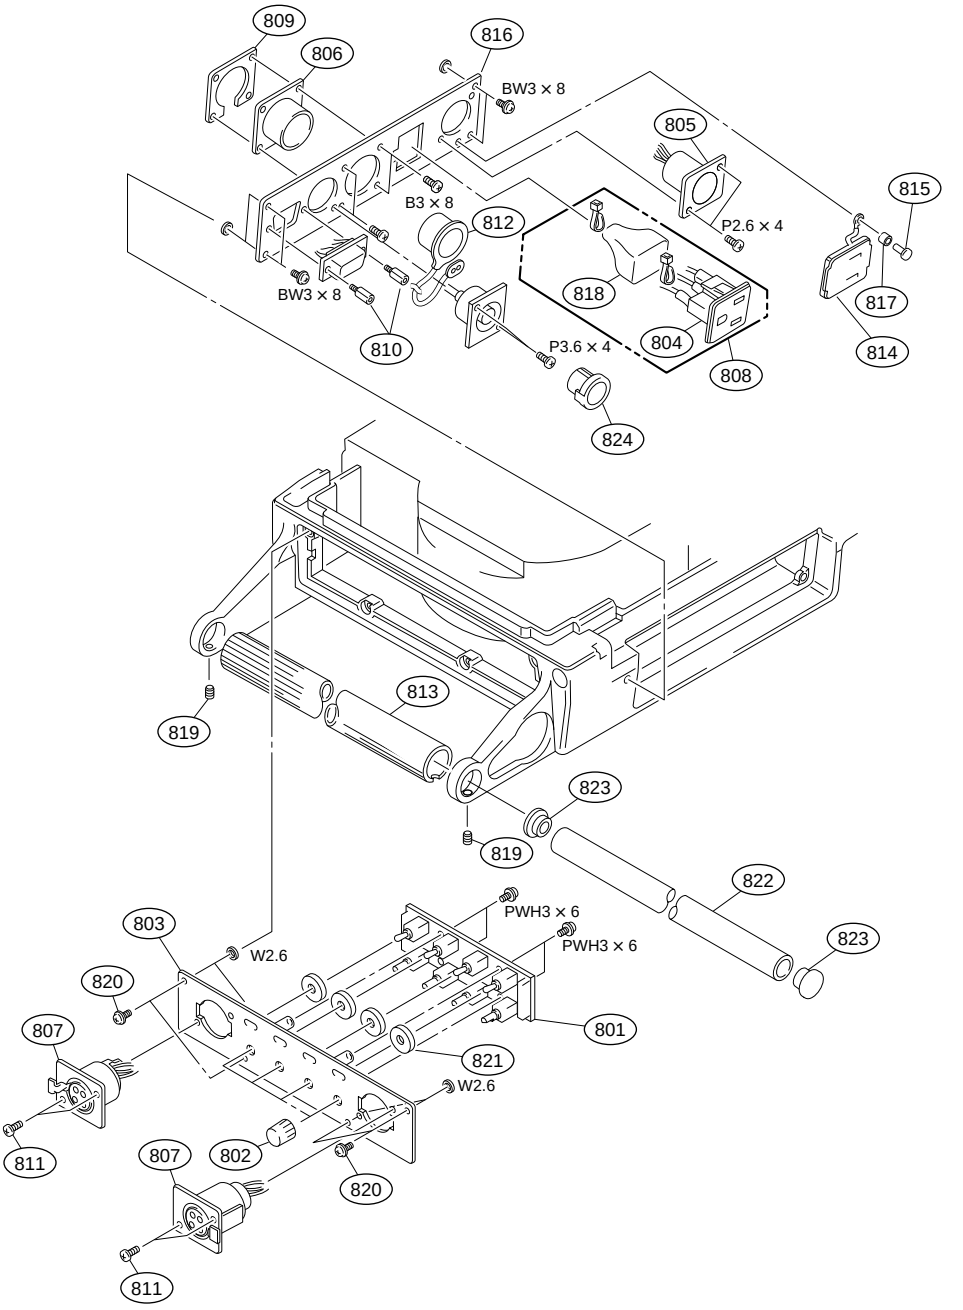

No.	Part No.	SP	Description
801	A-8314-068-A	o	MOUNTED CIRCUIT BOARD, SW-706
802	X-3167-563-1	s	VOLUME KNOB DIA.3 ASSY
803	X-3167-568-1	o	PANEL (N) ASSY, INTERCOM
804 ⚠	1-251-220-11	s	OUTLET, AC
805	1-509-177-31	s	CONNECTOR 4P MALE "DC IN"
806	1-562-244-00	o	CONNECTOR 26P MALE "VTR"
807	1-563-159-11	s	CONNECTOR 5P FEMALE "INCOM"
808	1-953-632-11	o	HARNESS (UTL(NTSC))
809	2-090-229-01	s	NUT, PLATE
810	2-254-842-02	s	COVER, SWITCH INSULATING
811	3-165-162-01	s	SCREW (+P2.6X5) (TYPE1)
812	3-166-346-01	s	CAP (CCZ), DROP PROTECTION
813	3-185-901-02	o	COVER, (B) HANDLE
814	3-186-500-01	o	LID (N), OUTLET
815	3-531-576-21	s	RIVET
816	3-602-967-01	o	PANEL(N),STAND ALONE
817	3-654-058-11	o	SPACER (3X2)
818	3-673-910-00	o	SCREW, CONNECTOR
819	3-701-510-00	s	SET SCREW, DOUBLE POINT 4X4
820	3-719-159-01	s	SCREW (M3), (+ BW)
821	3-729-007-01	o	PLATE, ORNAMENTAL, TOGGLE SW
822	3-740-815-01	o	PIPE, HANDLE
823	3-740-817-01	o	ESCUTCHEON, PIPE
824	3-741-726-01	o	CAP (2), XLR

(AU-203 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R203	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R204	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R205	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R206	1-218-711-11	s	METAL 6.2K 0.50% 1/16W
R207	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R208	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R209	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R210	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R211	1-218-711-11	s	METAL 6.2K 0.50% 1/16W
R212	1-218-717-11	s	CHIP, METAL 11K 0.50% 1/16W
R213	1-218-717-11	s	CHIP, METAL 11K 0.50% 1/16W
R214	1-218-740-11	s	METAL 100K 0.50% 1/16W
R215	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R216	1-218-740-11	s	METAL 100K 0.50% 1/16W
R217	1-218-711-11	s	METAL 6.2K 0.50% 1/16W
R218	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R219	1-218-711-11	s	METAL 6.2K 0.50% 1/16W
R220	1-218-716-11	s	METAL 10K 0.50% 1/16W
R221	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R222	1-218-716-11	s	METAL 10K 0.50% 1/16W
R223	1-218-716-11	s	METAL 10K 0.50% 1/16W
R224	1-218-740-11	s	METAL 100K 0.50% 1/16W
R225	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R226	1-218-740-11	s	METAL 100K 0.50% 1/16W
R227	1-218-740-11	s	METAL 100K 0.50% 1/16W
R228	1-218-716-11	s	METAL 10K 0.50% 1/16W
R229	1-218-716-11	s	METAL 10K 0.50% 1/16W
R230	1-218-740-11	s	METAL 100K 0.50% 1/16W
R231	1-218-644-11	s	METAL 10 0.50% 1/16W
R232	1-218-644-11	s	METAL 10 0.50% 1/16W
R233	1-218-716-11	s	METAL 10K 0.50% 1/16W
R234	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R235	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R236	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R237	1-218-732-11	s	METAL 47K 0.50% 1/16W
R238	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R239	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R240	1-218-740-11	s	METAL 100K 0.50% 1/16W
R241	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R242	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R243	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R244	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R245	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R246	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R247	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R248	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R249	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R250	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R251	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R253	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R256	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R257	1-218-720-11	s	METAL 15K 0.50% 1/16W
R258	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R259	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R260	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R261	1-218-716-11	s	METAL 10K 0.50% 1/16W
R262	1-218-716-11	s	METAL 10K 0.50% 1/16W
R263	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R264	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W

(AU-203 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R265	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R266	1-218-732-11	s	METAL 47K 0.50% 1/16W
R267	1-218-732-11	s	METAL 47K 0.50% 1/16W
R268	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R269	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R270	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R271	1-218-716-11	s	METAL 10K 0.50% 1/16W
R272	1-218-716-11	s	METAL 10K 0.50% 1/16W
R273	1-218-720-11	s	METAL 15K 0.50% 1/16W
R274	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R275	1-218-701-11	s	METAL 2.4K 0.50% 1/16W
R276	1-218-740-11	s	METAL 100K 0.50% 1/16W
R277	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R278	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R279	1-218-732-11	s	METAL 47K 0.50% 1/16W
R280	1-218-732-11	s	METAL 47K 0.50% 1/16W
R281	1-218-732-11	s	METAL 47K 0.50% 1/16W
R282	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R283	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R284	1-218-723-11	s	METAL 20K 0.50% 1/16W
R285	1-218-723-11	s	METAL 20K 0.50% 1/16W
R286	1-218-723-11	s	METAL 20K 0.50% 1/16W
R287	1-218-723-11	s	METAL 20K 0.50% 1/16W
R289	1-218-716-11	s	METAL 10K 0.50% 1/16W
R290	1-218-732-11	s	METAL 47K 0.50% 1/16W
R291	1-218-723-11	s	METAL 20K 0.50% 1/16W
R292	1-218-732-11	s	METAL 47K 0.50% 1/16W
R293	1-218-732-11	s	METAL 47K 0.50% 1/16W
R294	1-218-732-11	s	METAL 47K 0.50% 1/16W
R297	1-218-732-11	s	METAL 47K 0.50% 1/16W
R298	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R299	1-218-716-11	s	METAL 10K 0.50% 1/16W
R302	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R304	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R307	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R309	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R310	1-218-716-11	s	METAL 10K 0.50% 1/16W
R311	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R312	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R313	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R314	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R315	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R316	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R317	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R318	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R319	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R320	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R321	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R322	1-218-644-11	s	METAL 10 0.50% 1/16W
R324	1-218-732-11	s	METAL 47K 0.50% 1/16W
R326	1-218-716-11	s	METAL 10K 0.50% 1/16W
R328	1-216-864-11	s	CONDUCTOR,CHIP
R329	1-216-864-11	s	CONDUCTOR,CHIP
R330	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R331	1-218-703-11	s	METAL 3K 0.50% 1/16W
R332	1-218-732-11	s	METAL 47K 0.50% 1/16W
R335	1-218-740-11	s	METAL 100K 0.50% 1/16W
R338	1-218-728-11	s	METAL 33K 0.50% 1/16W
R339	1-218-644-11	s	METAL 10 0.50% 1/16W
R340	1-218-644-11	s	METAL 10 0.50% 1/16W

(AU-203 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R341	1-218-644-11	s	METAL 10 0.50% 1/16W
R342	1-218-644-11	s	METAL 10 0.50% 1/16W
R343	1-218-644-11	s	METAL 10 0.50% 1/16W
R344	1-218-644-11	s	METAL 10 0.50% 1/16W
R345	1-218-644-11	s	METAL 10 0.50% 1/16W
R346	1-218-644-11	s	METAL 10 0.50% 1/16W
R347	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R348	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R349	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R350	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R355	1-218-732-11	s	METAL 47K 0.50% 1/16W
R356	1-218-732-11	s	METAL 47K 0.50% 1/16W
R357	1-218-732-11	s	METAL 47K 0.50% 1/16W
R358	1-218-732-11	s	METAL 47K 0.50% 1/16W
R360	1-218-716-11	s	METAL 10K 0.50% 1/16W
R361	1-218-732-11	s	METAL 47K 0.50% 1/16W
R362	1-218-732-11	s	METAL 47K 0.50% 1/16W
R363	1-218-732-11	s	METAL 47K 0.50% 1/16W
R364	1-218-732-11	s	METAL 47K 0.50% 1/16W
R365	1-218-732-11	s	METAL 47K 0.50% 1/16W
R366	1-218-732-11	s	METAL 47K 0.50% 1/16W
R367	1-218-737-11	s	CHIP, METAL 75K 0.50% 1/16W
R370	1-218-740-11	s	METAL 100K 0.50% 1/16W
R372	1-218-644-11	s	METAL 10 0.50% 1/16W
R373	1-218-644-11	s	METAL 10 0.50% 1/16W
R374	1-218-644-11	s	METAL 10 0.50% 1/16W
R375	1-218-644-11	s	METAL 10 0.50% 1/16W
R376	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R377	1-218-732-11	s	METAL 47K 0.50% 1/16W
R378	1-218-732-11	s	METAL 47K 0.50% 1/16W
R379	1-218-644-11	s	METAL 10 0.50% 1/16W
R380	1-218-644-11	s	METAL 10 0.50% 1/16W
R381	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R382	1-218-732-11	s	METAL 47K 0.50% 1/16W
R383	1-218-732-11	s	METAL 47K 0.50% 1/16W
R384	1-218-731-11	s	CHIP, METAL 43K 0.50% 1/16W
R386	1-218-644-11	s	METAL 10 0.50% 1/16W
R387	1-218-644-11	s	METAL 10 0.50% 1/16W
R393	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R395	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R396	1-218-732-11	s	METAL 47K 0.50% 1/16W
R397	1-218-732-11	s	METAL 47K 0.50% 1/16W
R398	1-218-732-11	s	METAL 47K 0.50% 1/16W
R399	1-218-732-11	s	METAL 47K 0.50% 1/16W
R405	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R407	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R409	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R410	1-218-732-11	s	METAL 47K 0.50% 1/16W
R411	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R500	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R501	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R502	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R503	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R504	1-218-716-11	s	METAL 10K 0.50% 1/16W
R507	1-218-644-11	s	METAL 10 0.50% 1/16W
R508	1-218-644-11	s	METAL 10 0.50% 1/16W
R600	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R601	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R610	1-218-724-11	s	METAL 22K 5% 1/16W

(AU-203 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RV1	1-241-741-11	s	RES, ADJ METAL 50K
RV2	1-241-741-11	s	RES, ADJ METAL 50K
RV3	1-241-834-21	s	RES, ADJ, METAL 20K
RV4	1-241-741-11	s	RES, ADJ METAL 50K
RV5	1-241-741-11	s	RES, ADJ METAL 50K
RV8	1-241-833-11	s	RES, ADJ, METAL 10K
RV9	1-241-833-11	s	RES, ADJ, METAL 10K
RV10	1-241-833-11	s	RES, ADJ, METAL 10K
S2	1-554-295-00	s	SWITCH, SLIDE
S3	1-554-295-00	s	SWITCH, SLIDE
S4	1-572-342-11	s	SWITCH, SLIDE
S5	1-572-342-11	s	SWITCH, SLIDE
S6	1-570-711-11	s	SWITCH, SLIDE
S7	1-692-270-41	s	SWITCH, SLIDE
S8	1-692-270-41	s	SWITCH, SLIDE
S9	1-692-530-11	s	SWITCH, TOGGLE
S10	1-570-711-11	s	SWITCH, SLIDE
S11	1-570-711-11	s	SWITCH, SLIDE
S12	1-570-711-11	s	SWITCH, SLIDE
S13	1-570-711-11	s	SWITCH, SLIDE
S14	1-570-711-11	s	SWITCH, SLIDE
S15	1-570-711-11	s	SWITCH, SLIDE

(DAD-19 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C115	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C116	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C117	1-110-569-11	s	CHIP,TANTALUM 47uF 20% 6.3V
C118	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C119	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C120	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C121	1-110-569-11	s	CHIP,TANTALUM 47uF 20% 6.3V
C122	1-113-682-11	s	CHIP, TANTALUM 33uF 20% 10V
C123	1-164-156-11	s	CERAMIC 0.1uF 25V
C124	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C125	1-110-569-11	s	CHIP,TANTALUM 47uF 20% 6.3V
C126	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C127	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C128	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C129	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C130	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C131	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C132	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C133	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C134	1-164-156-11	s	CERAMIC 0.1uF 25V
C135	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C136	1-164-156-11	s	CERAMIC 0.1uF 25V
C137	1-110-569-11	s	CHIP,TANTALUM 47uF 20% 6.3V
C138	1-164-156-11	s	CERAMIC 0.1uF 25V
C139	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C140	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C141	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C142	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C143	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C144	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C145	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C146	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C147	1-164-156-11	s	CERAMIC 0.1uF 25V
C148	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C149	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C150	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C151	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C152	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C153	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C154	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C155	1-164-156-11	s	CERAMIC 0.1uF 25V
C156	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C157	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C158	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C159	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C160	1-110-569-11	s	CHIP,TANTALUM 47uF 20% 6.3V
C161	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C162	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C163	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C164	1-135-259-11	s	TANTALUM, CHIP 10uF 20% 6.3
C165	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C166	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C167	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C168	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C169	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C170	1-110-569-11	s	CHIP,TANTALUM 47uF 20% 6.3V
C171	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C172	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C173	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V

(DAD-19 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C174	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C175	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C176	1-110-569-11	s	CHIP,TANTALUM 47uF 20% 6.3V
C177	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C178	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C179	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C180	1-164-156-11	s	CERAMIC 0.1uF 25V
C181	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C182	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C183	1-164-156-11	s	CERAMIC 0.1uF 25V
C184	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C185	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C186	1-164-156-11	s	CERAMIC 0.1uF 25V
C187	1-164-156-11	s	CERAMIC 0.1uF 25V
C188	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C189	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C190	1-164-156-11	s	CERAMIC 0.1uF 25V
C191	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C192	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C193	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C194	1-164-156-11	s	CERAMIC 0.1uF 25V
C195	1-164-156-11	s	CERAMIC 0.1uF 25V
C196	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C197	1-164-156-11	s	CERAMIC 0.1uF 25V
C198	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C199	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C200	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C201	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C202	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C203	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C204	1-135-157-21	s	TANTAL 10uF 10% 6.3V
C205	1-164-156-11	s	CERAMIC 0.1uF 25V
C206	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C207	1-164-156-11	s	CERAMIC 0.1uF 25V
C208	1-164-156-11	s	CERAMIC 0.1uF 25V
C209	1-164-156-11	s	CERAMIC 0.1uF 25V
C210	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C211	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C212	1-162-964-11	s	CERAMIC 0.001uF 10% 50V
C213	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C214	1-135-259-11	s	TANTALUM, CHIP 10uF 20% 6.3
C215	1-162-964-11	s	CERAMIC 0.001uF 10% 50V
C216	1-162-964-11	s	CERAMIC 0.001uF 10% 50V
D1	8-719-800-76	s	DIODE 1SS226
DL1	1-406-743-11	s	DELAY LINE 27.0nS
DL2	1-415-889-11	s	DELAY LINE
FL1	1-233-606-21	s	FILTER (SMD), LOW PASS
FL3	1-233-601-11	s	FILTER (SMD), LOW PASS
FL4	1-233-601-11	s	FILTER (SMD), LOW PASS
FL5	1-233-602-21	s	FILTER (SMD), LOW PASS
IC1	8-759-386-29	s	IC 74LCX574SJX
IC2	8-759-054-61	s	IC CLC505AJE
IC3	8-759-054-61	s	IC CLC505AJE
IC4	8-759-054-61	s	IC CLC505AJE
IC5	8-759-347-04	s	IC SPT7860SCT
IC6	8-752-356-44	s	IC CXD2306Q
IC7	8-759-082-61	s	IC TC4W53FU

(DAD-19 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC8	8-759-386-29	s	IC 74LCX574SJX
IC9	8-759-327-01	s	IC NJM062V(TE2)
IC10	8-759-327-01	s	IC NJM062V(TE2)
IC11	8-759-470-22	o	IC 7032V-DAD19-PS-1.00
IC12	8-759-386-29	s	IC 74LCX574SJX
IC13	⚠ 8-759-185-42	s	IC LM4040AIM3-2.5
IC14	⚠ 8-759-327-01	s	IC NJM062V(TE2)
IC15	8-759-347-04	s	IC SPT7860SCT
IC16	8-759-386-29	s	IC 74LCX574SJX
IC17	⚠ 8-759-327-01	s	IC NJM062V(TE2)
IC18	8-759-054-61	s	IC CLC505AJE
IC19	8-752-356-44	s	IC CXD2306Q
IC20	8-759-470-24	o	IC 7032V-DAD19-SP-1.00
IC22	8-759-470-22	o	IC 7032V-DAD19-PS-1.00
IC23	8-759-054-61	s	IC CLC505AJE
IC24	8-759-054-61	s	IC CLC505AJE
IC25	8-759-347-04	s	IC SPT7860SCT
IC26	8-759-386-29	s	IC 74LCX574SJX
IC28	8-759-327-01	s	IC NJM062V(TE2)
IC29	8-759-082-61	s	IC TC4W53FU
IC30	8-759-327-01	s	IC NJM062V(TE2)
IC31	8-759-327-01	s	IC NJM062V(TE2)
IC32	8-759-054-61	s	IC CLC505AJE
IC33	8-752-356-44	s	IC CXD2306Q
IC34	8-759-386-29	s	IC 74LCX574SJX
IC35	8-759-470-21	o	IC 7032V-DAD19-FW-1.00
IC36	8-759-054-61	s	IC CLC505AJE
IC37	8-759-386-33	s	IC 74LCX240SJX
IC38	8-759-054-61	s	IC CLC505AJE
IC39	8-759-347-04	s	IC SPT7860SCT
IC40	8-759-386-29	s	IC 74LCX574SJX
IC41	8-759-082-61	s	IC TC4W53FU
IC42	8-759-386-29	s	IC 74LCX574SJX
IC43	8-759-386-31	s	IC 74LCX244SJX
IC44	8-759-386-29	s	IC 74LCX574SJX
IC45	8-759-386-31	s	IC 74LCX244SJX
IC46	8-759-470-25	o	IC 7032V-DAD19-TG-1.00
IC47	8-752-339-46	s	IC CXD1177Q
IC48	8-759-054-61	s	IC CLC505AJE
IC49	8-759-386-29	s	IC 74LCX574SJX
IC50	8-759-386-29	s	IC 74LCX574SJX
IC51	8-759-470-23	o	IC 7032V-DAD19-QTV-1.00
IC52	8-759-196-73	s	IC UPD485505G-25
IC53	8-759-386-29	s	IC 74LCX574SJX
IC54	8-759-386-31	s	IC 74LCX244SJX
IC55	8-759-175-04	s	IC PCF8574T-T
IC56	8-759-007-63	s	IC MC74HC75F
IC57	8-759-175-04	s	IC PCF8574T-T
IC58	8-759-386-31	s	IC 74LCX244SJX
IC59	8-759-086-41	s	IC X24C02S-3.0
IC60	8-759-180-08	s	IC TC74HC4538AFS
IC61	8-759-386-29	s	IC 74LCX574SJX
L1	1-412-390-21	s	INDUCTOR CHIP 0uH
L2	1-412-390-21	s	INDUCTOR CHIP 0uH
L3	1-412-390-21	s	INDUCTOR CHIP 0uH
L4	1-412-390-21	s	INDUCTOR CHIP 0uH
L5	1-412-390-21	s	INDUCTOR CHIP 0uH
L6	1-412-390-21	s	INDUCTOR CHIP 0uH

(DAD-19 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L7	1-412-390-21	s	INDUCTOR CHIP 0uH
L8	1-412-390-21	s	INDUCTOR CHIP 0uH
L9	1-412-390-21	s	INDUCTOR CHIP 0uH
L10	1-412-390-21	s	INDUCTOR CHIP 0uH
L11	1-412-390-21	s	INDUCTOR CHIP 0uH
L12	1-412-390-21	s	INDUCTOR CHIP 0uH
L13	1-412-390-21	s	INDUCTOR CHIP 0uH
L14	1-412-390-21	s	INDUCTOR CHIP 0uH
L15	1-412-390-21	s	INDUCTOR CHIP 0uH
Q1	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q2	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q3	8-729-117-32	s	TRANSISTOR 2SC4177
Q5	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q6	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q7	8-729-928-90	s	TRANSISTOR DTC114EE
Q8	8-729-928-90	s	TRANSISTOR DTC114EE
Q10	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q11	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q12	⚠ 8-729-820-90	s	TRANSISTOR 2SD1621-ST
Q13	⚠ 8-729-820-90	s	TRANSISTOR 2SD1621-ST
Q14	8-729-928-90	s	TRANSISTOR DTC114EE
Q15	8-729-117-32	s	TRANSISTOR 2SC4177
Q16	8-729-022-29	s	TRANSISTOR 2SJ332S
Q17	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q18	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q19	8-729-117-32	s	TRANSISTOR 2SC4177
R1	1-218-703-11	s	CHIP, METAL 3K 0.50% 1/16W
R2	1-218-695-11	s	METAL 1.3K 0.50% 1/16W
R3	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R4	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R5	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R6	1-218-851-11	s	CHIP, METAL 1.5K 0.50% 1/16W
R7	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R8	1-218-680-11	s	METAL 330 0.50% 1/16W
R9	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R10	1-218-680-11	s	METAL 330 0.50% 1/16W
R11	1-218-688-11	s	METAL 680 0.50% 1/16W
R12	1-218-688-11	s	METAL 680 0.50% 1/16W
R13	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R14	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R15	1-218-674-11	s	METAL 180 0.50% 1/16W
R16	1-218-680-11	s	METAL 330 0.50% 1/16W
R17	1-218-695-11	s	METAL 1.3K 0.50% 1/16W
R18	1-218-680-11	s	METAL 330 0.50% 1/16W
R19	1-218-676-11	s	METAL 220 0.50% 1/16W
R20	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R21	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R22	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R23	1-218-727-11	s	METAL 30K 0.50% 1/16W
R24	1-218-740-11	s	METAL 100K 0.50% 1/16W
R25	1-218-740-11	s	METAL 100K 0.50% 1/16W
R26	1-216-854-11	s	METAL, CHIP 560K 5% 1/16W
R27	1-218-722-11	s	CHIP, METAL 18K 0.50% 1/16W
R28	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R29	1-218-716-11	s	METAL 10K 0.50% 1/16W
R30	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R31	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R32	1-218-688-11	s	METAL 680 0.50% 1/16W

((DAP-5 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC26	8-759-242-64	s	IC TC4W53F
IC27	8-759-928-09	s	IC TLC27M2CPS
IC28	8-759-058-62	s	IC TC7S08FU(TE85R)
IC29	8-759-928-09	s	IC TLC27M2CPS
IC30	8-759-069-36	s	IC MC74HC4046AF
IC31	8-759-260-55	s	IC TLC272CPW-E05
IC32	8-759-349-47	s	IC TLC393CPW-E05
IC33	8-759-180-08	s	IC TC74HC4538AFS
IC34	8-759-175-04	s	IC PCF8574T-T
IC35	8-759-470-26	o	IC 27C512R-DAP5-AU-1.00
IC36	8-759-470-27	o	IC 7032V-DAP5-AU-1.00
IC37	8-759-069-36	s	IC MC74HC4046AF
IC38	8-759-260-55	s	IC TLC272CPW-E05
IC40	8-759-926-48	s	IC SN74HC244ANS
IC41	8-759-278-58	s	IC NJM4558V-TE2
IC42	8-759-278-58	s	IC NJM4558V-TE2
IC43	8-759-278-58	s	IC NJM4558V-TE2
IC44	8-759-278-58	s	IC NJM4558V-TE2
L1	1-412-390-21	s	INDUCTOR CHIP 0uH
L2	1-412-390-21	s	INDUCTOR CHIP 0uH
L3	1-412-390-21	s	INDUCTOR CHIP 0uH
L4	1-412-030-11	s	INDUCTOR CHIP 22uH
L5	1-412-030-11	s	INDUCTOR CHIP 22uH
Q1	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q2	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q3	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q4	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q5	8-729-928-90	s	TRANSISTOR DTC114EE
Q6	8-729-928-90	s	TRANSISTOR DTC114EE
Q8	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q9	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q13	8-729-820-90	s	TRANSISTOR 2SD1621-ST
Q14	8-729-820-90	s	TRANSISTOR 2SD1621-ST
Q19	8-729-928-36	s	TRANSISTOR DTA114EE
Q20	8-729-928-36	s	TRANSISTOR DTA114EE
Q21	8-729-117-16	s	TRANSISTOR 2SA1611-M6
Q22	8-729-117-32	s	TRANSISTOR 2SC4177
Q23	8-729-928-90	s	TRANSISTOR DTC114EE
Q24	8-729-021-63	s	TRANSISTOR 2SA1766-TD
Q25	8-729-928-90	s	TRANSISTOR DTC114EE
Q26	8-729-928-90	s	TRANSISTOR DTC114EE
Q27	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q28	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
R1	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R2	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R3	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R4	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R5	1-218-740-11	s	METAL 100K 0.50% 1/16W
R6	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R7	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R8	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R9	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R10	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R11	1-218-743-11	s	METAL 130K 0.50% 1/16W
R12	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R13	1-218-716-11	s	METAL 10K 0.50% 1/16W
R14	1-218-716-11	s	METAL 10K 0.50% 1/16W
R15	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R16	1-218-743-11	s	METAL 130K 0.50% 1/16W
R17	1-218-706-11	s	METAL 3.9K 0.50% 1/16W

(DAP-5 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R18	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R19	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R20	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R21	1-218-740-11	s	METAL 100K 0.50% 1/16W
R22	1-218-740-11	s	METAL 100K 0.50% 1/16W
R23	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R24	1-218-740-11	s	METAL 100K 0.50% 1/16W
R25	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R26	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R27	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R28	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R29	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R30	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R31	1-218-743-11	s	METAL 130K 0.50% 1/16W
R32	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R33	1-218-743-11	s	METAL 130K 0.50% 1/16W
R34	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R35	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R36	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R37	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R38	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R39	1-218-664-11	s	CHIP, METAL 68 0.50% 1/16W
R40	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R41	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R42	1-218-716-11	s	METAL 10K 0.50% 1/16W
R43	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R44	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R45	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R46	1-218-716-11	s	METAL 10K 0.50% 1/16W
R47	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R48	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R49	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R50	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R51	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R52	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R53	1-218-743-11	s	METAL 130K 0.50% 1/16W
R54	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R55	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R56	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R57	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R58	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R59	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R60	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R61	1-218-716-11	s	METAL 10K 0.50% 1/16W
R62	1-218-716-11	s	METAL 10K 0.50% 1/16W
R63	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R64	1-218-743-11	s	METAL 130K 0.50% 1/16W
R65	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R66	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R67	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R68	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R69	1-218-700-11	s	METAL 2.2K 0.50% 1/16W
R70	1-218-701-11	s	METAL 2.4K 0.50% 1/16W
R71	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R72	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R73	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R74	1-218-743-11	s	METAL 130K 0.50% 1/16W
R75	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R76	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W

(DAP-5 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R77	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R78	1-218-716-11	s	METAL 10K 0.50% 1/16W
R79	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R80	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R81	1-218-716-11	s	METAL 10K 0.50% 1/16W
R82	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R83	1-218-743-11	s	METAL 130K 0.50% 1/16W
R84	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R85	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R86	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R87	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R88	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R89	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R90	1-218-716-11	s	METAL 10K 0.50% 1/16W
R91	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R92	1-218-716-11	s	METAL 10K 0.50% 1/16W
R93	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R94	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R95	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R96	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R97	1-218-732-11	s	METAL 47K 0.50% 1/16W
R98	1-218-740-11	s	METAL 100K 0.50% 1/16W
R99	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R100	1-218-740-11	s	METAL 100K 0.50% 1/16W
R101	1-218-716-11	s	METAL 10K 0.50% 1/16W
R102	1-218-716-11	s	METAL 10K 0.50% 1/16W
R103	1-218-716-11	s	METAL 10K 0.50% 1/16W
R104	1-218-716-11	s	METAL 10K 0.50% 1/16W
R105	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R106	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R107	1-218-716-11	s	METAL 10K 0.50% 1/16W
R108	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R109	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R110	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R111	1-218-740-11	s	METAL 100K 0.50% 1/16W
R112	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R113	1-218-716-11	s	METAL 10K 0.50% 1/16W
R114	1-218-664-11	s	CHIP, METAL 68 0.50% 1/16W
R115	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R116	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R117	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R118	1-218-732-11	s	METAL 47K 0.50% 1/16W
R119	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R120	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R121	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R123	1-218-716-11	s	METAL 10K 0.50% 1/16W
R124	1-218-716-11	s	METAL 10K 0.50% 1/16W
R125	1-218-716-11	s	METAL 10K 0.50% 1/16W
R126	1-218-716-11	s	METAL 10K 0.50% 1/16W
R128	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R129	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R130	1-218-740-11	s	METAL 100K 0.50% 1/16W
R131	1-218-656-11	s	CHIP, METAL 33 0.50% 1/16W
R132	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R133	1-218-656-11	s	CHIP, METAL 33 0.50% 1/16W
R134	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R135	1-218-716-11	s	METAL 10K 0.50% 1/16W
R136	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R137	1-218-716-11	s	METAL 10K 0.50% 1/16W

(DAP-5 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R138	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R139	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R140	1-218-656-11	s	CHIP, METAL 33 0.50% 1/16W
R141	1-218-656-11	s	CHIP, METAL 33 0.50% 1/16W
R142	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R143	1-218-740-11	s	METAL 100K 0.50% 1/16W
R144	1-216-863-11	s	METAL 3.3M 5% 1/16W
R145	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R146	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R148	1-218-740-11	s	METAL 100K 0.50% 1/16W
R151	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R152	1-218-740-11	s	METAL 100K 0.50% 1/16W
R154	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R158	1-218-741-11	s	METAL 110K 0.50% 1/16W
R159	1-216-854-11	s	METAL, CHIP 560K 5% 1/16W
R160	1-218-716-11	s	METAL 10K 0.50% 1/16W
R161	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R162	1-218-644-11	s	METAL 10 0.50% 1/16W
R163	1-218-644-11	s	METAL 10 0.50% 1/16W
R164	1-218-644-11	s	METAL 10 0.50% 1/16W
R165	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R166	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R167	1-218-716-11	s	METAL 10K 0.50% 1/16W
R168	1-218-644-11	s	METAL 10 0.50% 1/16W
R169	1-218-644-11	s	METAL 10 0.50% 1/16W
R170	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R171	1-218-644-11	s	METAL 10 0.50% 1/16W
R172	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R173	1-218-644-11	s	METAL 10 0.50% 1/16W
R174	1-218-644-11	s	METAL 10 0.50% 1/16W
R175	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R176	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R177	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R178	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R179	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R180	1-218-685-11	s	METAL 510 0.50% 1/16W
R181	1-218-716-11	s	METAL 10K 0.50% 1/16W
R182	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R183	1-218-711-11	s	METAL 6.2K 0.50% 1/16W
R184	1-218-740-11	s	METAL 100K 0.50% 1/16W
R185	1-218-740-11	s	METAL 100K 0.50% 1/16W
R186	1-218-740-11	s	METAL 100K 0.50% 1/16W
R187	1-218-740-11	s	METAL 100K 0.50% 1/16W
R188	1-218-740-11	s	METAL 100K 0.50% 1/16W
R189	1-218-740-11	s	METAL 100K 0.50% 1/16W
R190	1-218-740-11	s	METAL 100K 0.50% 1/16W
R191	1-218-740-11	s	METAL 100K 0.50% 1/16W
R192	1-218-644-11	s	METAL 10 0.50% 1/16W
R193	1-218-644-11	s	METAL 10 0.50% 1/16W
R194	1-218-644-11	s	METAL 10 0.50% 1/16W
R195	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R196	1-218-711-11	s	METAL 6.2K 0.50% 1/16W
R197	1-218-644-11	s	METAL 10 0.50% 1/16W
R198	1-218-644-11	s	METAL 10 0.50% 1/16W
R199	1-218-644-11	s	METAL 10 0.50% 1/16W
R200	1-218-644-11	s	METAL 10 0.50% 1/16W
R201	1-218-733-11	s	CHIP, METAL 51K 0.50% 1/16W
R202	1-218-644-11	s	METAL 10 0.50% 1/16W
R203	1-218-644-11	s	METAL 10 0.50% 1/16W

(DL-65 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R34	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R35	1-218-716-11	s	METAL 10K 0.50% 1/16W
R36	1-218-716-11	s	METAL 10K 0.50% 1/16W
R37	1-218-716-11	s	METAL 10K 0.50% 1/16W
R38	1-218-698-11	s	METAL 1.8K 0.50% 1/16W
R39	1-218-689-11	s	CHIP, METAL 750 0.50% 1/16W
R40	1-218-716-11	s	METAL 10K 0.50% 1/16W
R41	1-218-644-11	s	METAL 10 0.50% 1/16W
R42	1-218-728-11	s	METAL 33K 0.50% 1/16W
R43	1-218-655-91	s	CHIP, METAL 30 0.50% 1/16W
R44	1-218-667-11	s	CHIP, METAL 91 0.50% 1/16W
R50	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R51	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R55	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R57	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R58	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R60	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R61	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R62	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R63	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R64	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R65	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R66	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R67	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R68	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R69	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R101	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R102	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R103	1-218-728-11	s	METAL 33K 0.50% 1/16W
R104	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R105	1-218-740-11	s	METAL 100K 0.50% 1/16W
R112	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R114	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R115	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R116	1-218-722-11	s	CHIP, METAL 18K 0.50% 1/16W
R117	1-218-695-11	s	METAL 1.3K 0.50% 1/16W
R118	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R119	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R120	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R121	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R122	1-218-736-11	s	METAL 68K 0.50% 1/16W
R123	1-218-680-11	s	METAL 330 0.50% 1/16W
R124	1-218-720-11	s	METAL 15K 0.50% 1/16W
R125	1-218-727-11	s	METAL 30K 0.50% 1/16W
R126	1-218-664-11	s	CHIP, METAL 68 0.50% 1/16W
R127	1-218-680-11	s	METAL 330 0.50% 1/16W
R128	1-218-680-11	s	METAL 330 0.50% 1/16W
R129	1-218-881-11	s	CHIP, METAL 27K 0.50% 1/16W
R131	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R132	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R133	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R134	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R135	1-218-680-11	s	METAL 330 0.50% 1/16W
R136	1-218-680-11	s	METAL 330 0.50% 1/16W
R137	1-218-644-11	s	METAL 10 0.50% 1/16W
R140	1-218-644-11	s	METAL 10 0.50% 1/16W
R142	1-218-644-11	s	METAL 10 0.50% 1/16W
R143	1-218-644-11	s	METAL 10 0.50% 1/16W
R145	1-218-644-11	s	METAL 10 0.50% 1/16W

(DL-65 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R148	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R150	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R151	1-218-680-11	s	METAL 330 0.50% 1/16W
R152	1-218-680-11	s	METAL 330 0.50% 1/16W
R153	1-218-680-11	s	METAL 330 0.50% 1/16W
R154	1-218-680-11	s	METAL 330 0.50% 1/16W
R155	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R156	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R159	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R161	1-218-680-11	s	METAL 330 0.50% 1/16W
R162	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R163	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R164	1-218-734-11	s	CHIP, METAL 56K 5% 1/16W
R165	1-218-711-11	s	CHIP, METAL 6.2K 0.50% 1/16W
R166	1-218-680-11	s	METAL 330 0.50% 1/16W
R167	1-218-680-11	s	METAL 330 0.50% 1/16W
R168	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R169	1-218-740-11	s	METAL 100K 0.50% 1/16W
R170	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R171	1-218-736-11	s	METAL 68K 0.50% 1/16W
R172	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R173	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R175	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R190	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R301	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R302	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R303	1-218-728-11	s	METAL 33K 0.50% 1/16W
R304	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R305	1-218-740-11	s	METAL 100K 0.50% 1/16W
R312	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R314	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R315	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R316	1-218-722-11	s	CHIP, METAL 18K 0.50% 1/16W
R317	1-218-695-11	s	METAL 1.3K 0.50% 1/16W
R318	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R319	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R320	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R321	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R322	1-218-736-11	s	METAL 68K 0.50% 1/16W
R323	1-218-680-11	s	METAL 330 0.50% 1/16W
R324	1-218-720-11	s	METAL 15K 0.50% 1/16W
R325	1-218-727-11	s	METAL 30K 0.50% 1/16W
R326	1-218-664-11	s	CHIP, METAL 68 0.50% 1/16W
R327	1-218-680-11	s	METAL 330 0.50% 1/16W
R328	1-218-680-11	s	METAL 330 0.50% 1/16W
R329	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R330	1-218-881-11	s	CHIP, METAL 27K 0.50% 1/16W
R331	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R332	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R333	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R334	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R335	1-218-680-11	s	METAL 330 0.50% 1/16W
R336	1-218-680-11	s	METAL 330 0.50% 1/16W
R337	1-218-644-11	s	METAL 10 0.50% 1/16W
R340	1-218-644-11	s	METAL 10 0.50% 1/16W
R342	1-218-644-11	s	METAL 10 0.50% 1/16W
R343	1-218-644-11	s	METAL 10 0.50% 1/16W
R345	1-218-644-11	s	METAL 10 0.50% 1/16W
R348	1-216-864-11	s	METAL, CHIP 0 5% 1/16W

(DL-65 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R350	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R351	1-218-680-11	s	METAL 330 0.50% 1/16W
R352	1-218-680-11	s	METAL 330 0.50% 1/16W
R353	1-218-680-11	s	METAL 330 0.50% 1/16W
R354	1-218-680-11	s	METAL 330 0.50% 1/16W
R355	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R356	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R359	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R361	1-218-680-11	s	METAL 330 0.50% 1/16W
R362	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R363	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R364	1-218-734-11	s	CHIP, METAL 56K 5% 1/16W
R365	1-218-711-11	s	CHIP, METAL 6.2K 0.50% 1/16W
R366	1-218-680-11	s	METAL 330 0.50% 1/16W
R367	1-218-680-11	s	METAL 330 0.50% 1/16W
R368	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R369	1-218-740-11	s	METAL 100K 0.50% 1/16W
R370	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R371	1-218-736-11	s	METAL 68K 0.50% 1/16W
R372	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R373	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R375	1-218-644-11	s	METAL 10 0.50% 1/16W
R377	1-218-644-11	s	METAL 10 0.50% 1/16W
R378	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R379	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R380	1-218-644-11	s	METAL 10 0.50% 1/16W
R382	1-218-680-11	s	METAL 330 0.50% 1/16W
R383	1-218-680-11	s	METAL 330 0.50% 1/16W
R384	1-218-680-11	s	METAL 330 0.50% 1/16W
R385	1-218-680-11	s	METAL 330 0.50% 1/16W
R386	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R387	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R392	1-218-680-11	s	METAL 330 0.50% 1/16W
R393	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R394	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R395	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R396	1-218-734-11	s	CHIP, METAL 56K 5% 1/16W
R397	1-218-711-11	s	CHIP, METAL 6.2K 0.50% 1/16W
R398	1-218-680-11	s	METAL 330 0.50% 1/16W
R399	1-218-680-11	s	METAL 330 0.50% 1/16W
R400	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R401	1-218-740-11	s	METAL 100K 0.50% 1/16W
R402	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R403	1-218-736-11	s	METAL 68K 0.50% 1/16W
R404	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R405	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R490	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R501	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R502	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R503	1-218-728-11	s	METAL 33K 0.50% 1/16W
R504	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R505	1-218-740-11	s	METAL 100K 0.50% 1/16W
R512	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R514	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R515	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R516	1-218-722-11	s	CHIP, METAL 18K 0.50% 1/16W
R517	1-218-695-11	s	METAL 1.3K 0.50% 1/16W
R518	1-218-706-11	s	METAL 3.9K 0.50% 1/16W
R519	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W

(DL-65 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R520	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R521	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R522	1-218-736-11	s	METAL 68K 0.50% 1/16W
R523	1-218-680-11	s	METAL 330 0.50% 1/16W
R524	1-218-720-11	s	METAL 15K 0.50% 1/16W
R525	1-218-727-11	s	METAL 30K 0.50% 1/16W
R526	1-218-664-11	s	CHIP, METAL 68 0.50% 1/16W
R527	1-218-680-11	s	METAL 330 0.50% 1/16W
R528	1-218-680-11	s	METAL 330 0.50% 1/16W
R529	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R530	1-218-881-11	s	CHIP, METAL 27K 0.50% 1/16W
R531	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R532	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R533	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R534	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R535	1-218-680-11	s	METAL 330 0.50% 1/16W
R536	1-218-680-11	s	METAL 330 0.50% 1/16W
R537	1-218-644-11	s	METAL 10 0.50% 1/16W
R540	1-218-644-11	s	METAL 10 0.50% 1/16W
R542	1-218-644-11	s	METAL 10 0.50% 1/16W
R543	1-218-644-11	s	METAL 10 0.50% 1/16W
R545	1-218-644-11	s	METAL 10 0.50% 1/16W
R547	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R548	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R549	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R550	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R551	1-218-680-11	s	METAL 330 0.50% 1/16W
R552	1-218-680-11	s	METAL 330 0.50% 1/16W
R553	1-218-680-11	s	METAL 330 0.50% 1/16W
R554	1-218-680-11	s	METAL 330 0.50% 1/16W
R555	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R556	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R559	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R560	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R562	1-218-680-11	s	METAL 330 0.50% 1/16W
R563	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R564	1-218-734-11	s	CHIP, METAL 56K 5% 1/16W
R565	1-218-711-11	s	CHIP, METAL 6.2K 0.50% 1/16W
R566	1-218-680-11	s	METAL 330 0.50% 1/16W
R567	1-218-680-11	s	METAL 330 0.50% 1/16W
R568	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R569	1-218-740-11	s	METAL 100K 0.50% 1/16W
R570	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R571	1-218-736-11	s	METAL 68K 0.50% 1/16W
R572	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R573	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R590	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R701	1-218-728-11	s	METAL 33K 0.50% 1/16W
R702	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R703	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R704	1-218-728-11	s	METAL 33K 0.50% 1/16W
R705	1-218-701-11	s	METAL 2.4K 0.50% 1/16W
R706	1-218-714-11	s	METAL 8.2K 0.50% 1/16W
R707	1-218-674-11	s	METAL 180 0.50% 1/16W
R708	1-218-680-11	s	METAL 330 0.50% 1/16W
R709	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R710	1-218-653-11	s	METAL 24 0.50% 1/16W
R711	1-218-667-11	s	CHIP, METAL 91 0.50% 1/16W
R712	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W

MB-570 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8273-211-A	o	MOUNTED CIRCUIT BOARD, MB-570
1pc	3-602-472-02	o	SUPPORT,PC BOARD
11pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)
1pc	7-621-770-87	s	SCREW +B 2.6X5
C1	1-107-823-11	s	CHIP, CERAMIC 0.47uF 10% 16V
C2	1-104-920-11	s	CHIP, TANTALUM 4.7uF 20% 35V
C3	1-164-156-11	s	CERAMIC 0.1uF 25V
C4	1-164-156-11	s	CERAMIC 0.1uF 25V
C5	1-107-823-11	s	CHIP, CERAMIC 0.47uF 10% 16V
C6	1-107-823-11	s	CHIP, CERAMIC 0.47uF 10% 16V
C7	1-107-689-21	s	TANTAL 1uF 20% 35V
C8	1-107-823-11	s	CHIP, CERAMIC 0.47uF 10% 16V
C10	1-107-689-21	s	TANTAL 1uF 20% 35V
CN1	1-691-845-11	o	CONNECTOR, BOARD TO BOARD 50P
CN2	1-691-845-11	o	CONNECTOR, BOARD TO BOARD 50P
CN3	1-691-845-11	o	CONNECTOR, BOARD TO BOARD 50P
CN4	1-691-845-11	o	CONNECTOR, BOARD TO BOARD 50P
CN6	1-695-207-21	o	PIN, CONNECTOR (PC BOARD) 6P
CN7	1-750-934-21	o	PIN, CONNECTOR 20P
CN8	1-766-384-11	s	CONNECTOR, FPC 28P
CN9	1-568-360-21	s	CONNECTOR, BOARD TO BOARD 22P
CN10	1-764-099-11	s	PIN, CONNECTOR (PC BOARD) 14P
CN11	1-764-097-11	o	PIN, CONNECTOR (PC BOARD) 12P
CN14	1-778-005-21	o	CONNECTOR, BOARD TO BOARD 20P
CN15	1-569-532-11	s	HOUSING, 30P
CN16	1-569-532-11	s	HOUSING, 30P
CN18	1-770-580-11	o	SOCKET, CONNECTOR(PCB-PCB) 26P
D1	8-719-059-52	s	DIODE MA3J14300LSO
D2	8-719-059-52	s	DIODE MA3J14300LSO
D3	8-719-051-05	s	DIODE EC10QS06-TE12L5
D4	8-719-051-05	s	DIODE EC10QS06-TE12L5
D5	8-719-051-05	s	DIODE EC10QS06-TE12L5
D10	8-719-422-23	s	DIODE MA8047
D11	8-719-029-68	s	DIODE RD6.2UJN-T1
IC1	8-759-086-41	s	IC X24C02S-3.0
IC2	8-759-398-81	s	IC TLC27M2CPW-E05
IC3	8-759-185-42	s	IC LM4040AIM3-2.5
Q1	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q2	8-729-117-32	s	TRANSISTOR 2SC4177
Q8	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q9	8-729-928-36	s	TRANSISTOR DTA114EE
R5	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R6	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R7	1-218-740-11	s	METAL 100K 0.50% 1/16W
R8	1-218-740-11	s	METAL 100K 0.50% 1/16W
R9	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R10	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R11	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R12	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R13	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R14	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R15	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R16	1-218-725-11	s	METAL 24K 0.50% 1/16W
R21	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R24	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R29	1-218-712-11	s	CHIP, METAL 6.8K 0.50% 1/16W
R30	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W

Ref. No. or Q'ty	Part No.	SP	Description
R31	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R32	1-218-740-11	s	METAL 100K 0.50% 1/16W
R36	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R37	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R39	1-218-723-11	s	METAL 20K 0.50% 1/16W
R40	1-247-855-11	s	CARBON 10K 5% 1/4W
R41	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R42	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R43	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R44	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W

MB-573 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8273-140-A	o	MOUNTED CIRCUIT BOARD, MB-573
12pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)
1pc	3-602-434-02	o	SUPPORT,PC BOARD
1pc	7-621-773-86	s	SCREW +B 2.6X4
C1	1-104-920-11	s	CHIP, TANTALUM 4.7uF 20% 35V
C2	1-104-920-11	s	CHIP, TANTALUM 4.7uF 20% 35V
C3	1-164-156-11	s	CERAMIC 0.1uF 25V
C4	1-164-156-11	s	CERAMIC 0.1uF 25V
C6	1-164-156-11	s	CERAMIC 0.1uF 25V
C7	1-164-156-11	s	CERAMIC 0.1uF 25V
C8	1-107-689-21	s	TANTAL 1uF 20% 35V
CN5	1-774-995-11	o	CONNECTOR, BOARD TO BOARD 50P
CN7	1-569-532-11	s	HOUSING, 30P
CN8	1-569-532-11	s	HOUSING, 30P
CN9	1-764-088-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN10	1-750-935-21	o	PIN, CONNECTOR 30P
CN11	1-750-933-21	o	PIN, CONNECTOR 12P
CN12	1-750-933-21	o	PIN, CONNECTOR 12P
CN13	1-750-933-21	o	PIN, CONNECTOR 12P
CN14	1-764-089-11	o	PIN, CONNECTOR (PC BOARD) 4P
CN15	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN16	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN17	1-764-088-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN19	1-695-479-11	o	PIN, CONNECTOR (PC BOARD) 2P
CN20	1-695-479-11	o	PIN, CONNECTOR (PC BOARD) 2P
CN21	1-764-090-11	o	PIN, CONNECTOR (PC BOARD) 5P
CN22	1-764-097-11	o	PIN, CONNECTOR (PC BOARD) 12P
CN23	1-695-210-21	o	PIN, CONNECTOR (PC BOARD) 15P
CN24	1-764-097-11	o	PIN, CONNECTOR (PC BOARD) 12P
CN25	1-764-091-11	o	PIN, CONNECTOR (PC BOARD) 6P
CN26	1-695-479-11	o	PIN, CONNECTOR (PC BOARD) 2P
CN27	1-764-097-11	o	PIN, CONNECTOR (PC BOARD) 12P
CN28	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN29	1-695-479-11	o	PIN, CONNECTOR (PC BOARD) 2P
CN30	1-764-088-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN31	1-764-091-11	o	PIN, CONNECTOR (PC BOARD) 6P
CN32	1-695-479-11	o	PIN, CONNECTOR (PC BOARD) 2P
D1	8-719-059-52	s	DIODE MA3J14300LSO
D2	8-719-059-52	s	DIODE MA3J14300LSO
D3	8-719-059-51	s	DIODE MA3J142E0LSO
D6	8-719-059-52	s	DIODE MA3J14300LSO
D7	8-719-059-52	s	DIODE MA3J14300LSO
D9	8-719-422-23	s	DIODE MA8047
IC1	8-759-086-41	s	IC X24C02S-3.0
IC2	8-759-398-81	s	IC TLC27M2CPW-E05
IC3	8-759-185-42	s	IC LM4040AIM3-2.5
Q1	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q2	8-729-117-32	s	TRANSISTOR 2SC4177
Q3	8-729-928-90	s	TRANSISTOR DTC114EE
Q4	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q5	8-729-117-32	s	TRANSISTOR 2SC4177
Q6	8-729-928-90	s	TRANSISTOR DTC114EE
Q7	8-729-928-90	s	TRANSISTOR DTC114EE
Q8	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q9	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q10	8-729-928-36	s	TRANSISTOR DTA114EE

(MB-573 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q11	8-729-928-36	s	TRANSISTOR DTA114EE
Q12	8-729-928-36	s	TRANSISTOR DTA114EE
Q13	8-729-928-36	s	TRANSISTOR DTA114EE
R1	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R2	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R3	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R4	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R5	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R6	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R7	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R8	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R9	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R10	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R11	1-218-740-11	s	METAL 100K 0.50% 1/16W
R12	1-218-740-11	s	METAL 100K 0.50% 1/16W
R13	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R14	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R15	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R16	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R17	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R18	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R19	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R20	1-218-725-11	s	METAL 24K 0.50% 1/16W
R21	1-218-712-11	s	CHIP, METAL 6.8K 0.50% 1/16W
R22	1-218-740-11	s	METAL 100K 0.50% 1/16W
R23	1-218-727-11	s	METAL 30K 0.50% 1/16W
R24	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R25	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R26	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R27	1-218-725-11	s	METAL 24K 0.50% 1/16W
R28	1-218-712-11	s	CHIP, METAL 6.8K 0.50% 1/16W
R29	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R30	1-218-725-11	s	METAL 24K 0.50% 1/16W
R31	1-218-740-11	s	METAL 100K 0.50% 1/16W
R32	1-218-727-11	s	METAL 30K 0.50% 1/16W
R33	1-218-727-11	s	METAL 30K 0.50% 1/16W
R36	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R37	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R39	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R42	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R43	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R45	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R46	1-218-712-11	s	CHIP, METAL 6.8K 0.50% 1/16W
R47	1-218-712-11	s	CHIP, METAL 6.8K 0.50% 1/16W
R48	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R49	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R50	1-218-728-11	s	METAL 33K 0.50% 1/16W
R51	1-218-728-11	s	METAL 33K 0.50% 1/16W

MB-666 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8273-180-A	o	MOUNTED CIRCUIT BOARD, MB-666
28pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)
BZ1	1-529-104-11	s	BUZZER, PIEZOELECTRIC
C1	1-104-920-11	s	CHIP, TANTALUM 4.7uF 20% 35V
C2	1-104-920-11	s	CHIP, TANTALUM 4.7uF 20% 35V
C3	1-164-156-11	s	CERAMIC 0.1uF 25V
C4	1-164-156-11	s	CERAMIC 0.1uF 25V
C5	1-164-156-11	s	CERAMIC 0.1uF 25V
C6	1-164-156-11	s	CERAMIC 0.1uF 25V
C7	1-107-689-21	s	TANTAL 1uF 20% 35V
C8	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C9	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C10	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C11	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C12	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C13	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C14	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C15	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C16	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C17	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C18	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C19	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C20	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C21	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C22	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C23	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C24	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C25	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C26	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C27	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C28	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C29	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C30	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C31	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C32	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C33	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C34	1-107-689-21	s	TANTAL 1uF 20% 35V
C35	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C36	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C37	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C38	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C39	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C40	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C41	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C42	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C43	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C44	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C45	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C46	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C47	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C48	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C49	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C50	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C51	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C52	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C53	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C54	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C55	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V

(MB-666 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C56	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C57	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C58	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C59	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C60	1-107-689-21	s	TANTAL 1uF 20% 35V
CN1	1-691-845-11	o	CONNECTOR, BOARD TO BOARD 50P
CN2	1-691-845-11	o	CONNECTOR, BOARD TO BOARD 50P
CN3	1-691-845-11	o	CONNECTOR, BOARD TO BOARD 50P
CN4	1-691-845-11	o	CONNECTOR, BOARD TO BOARD 50P
CN11	1-774-995-11	o	CONNECTOR, BOARD TO BOARD 50P
CN12	1-750-933-21	o	PIN, CONNECTOR 12P
CN13	1-766-384-11	s	CONNECTOR, FPC 28P
CN14	1-750-934-21	o	PIN, CONNECTOR 20P
CN15	1-750-934-21	o	PIN, CONNECTOR 20P
CN17	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN18	1-750-933-21	o	PIN, CONNECTOR 12P
CN19	1-750-935-21	o	PIN, CONNECTOR 30P
CN20	1-691-845-11	o	CONNECTOR, BOARD TO BOARD 50P
CN21	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN22	1-750-935-21	o	PIN, CONNECTOR 30P
CN24	1-695-210-21	o	PIN, CONNECTOR (PC BOARD) 15P
CN25	1-695-210-21	o	PIN, CONNECTOR (PC BOARD) 15P
CN26	1-764-092-11	o	PIN, CONNECTOR (PC BOARD) 7P
CN27	1-750-935-21	o	PIN, CONNECTOR 30P
CN29	1-750-935-21	o	PIN, CONNECTOR 30P
CN30	1-750-934-21	o	PIN, CONNECTOR 20P
D1	8-719-059-52	s	DIODE MA3J14300LSO
D2	8-719-059-52	s	DIODE MA3J14300LSO
D3	8-719-059-52	s	DIODE MA3J14300LSO
D4	8-719-422-23	s	DIODE MA8047
D5	8-719-059-52	s	DIODE MA3J14300LSO
D6	8-719-059-52	s	DIODE MA3J14300LSO
D7	8-719-059-52	s	DIODE MA3J14300LSO
D8	8-719-059-52	s	DIODE MA3J14300LSO
D9	8-719-059-52	s	DIODE MA3J14300LSO
IC1	8-759-185-42	s	IC LM4040AIM3-2.5
IC2	8-759-398-81	s	IC TLC27M2CPW-E05
IC3	8-759-185-42	s	IC LM4040AIM3-2.5
IC4	8-759-086-41	s	IC X24C02S-3.0
IC5	8-759-398-81	s	IC TLC27M2CPW-E05
IC6	8-759-175-04	s	IC PCF8574T-T
Q1	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q2	8-729-117-32	s	TRANSISTOR 2SC4177
Q3	8-729-928-90	s	TRANSISTOR DTC114EE
Q4	8-729-928-90	s	TRANSISTOR DTC114EE
Q5	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q6	8-729-117-32	s	TRANSISTOR 2SC4177
Q7	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q8	8-729-820-90	s	TRANSISTOR 2SD1621-ST
R1	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R2	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R3	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R4	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R5	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R6	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R7	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R8	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W

(MB-666 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R9	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R10	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R14	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R15	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R16	1-218-725-11	s	METAL 24K 0.50% 1/16W
R17	1-218-712-11	s	CHIP, METAL 6.8K 0.50% 1/16W
R18	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R19	1-218-740-11	s	METAL 100K 0.50% 1/16W
R20	1-218-727-11	s	METAL 30K 0.50% 1/16W
R21	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R22	1-218-723-11	s	METAL 20K 0.50% 1/16W
R23	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R24	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R26	1-218-728-11	s	METAL 33K 0.50% 1/16W
R27	1-218-728-11	s	METAL 33K 0.50% 1/16W
R28	1-218-728-11	s	METAL 33K 0.50% 1/16W
R29	1-218-728-11	s	METAL 33K 0.50% 1/16W
R30	1-218-728-11	s	METAL 33K 0.50% 1/16W
R31	1-218-728-11	s	METAL 33K 0.50% 1/16W
R32	1-218-728-11	s	METAL 33K 0.50% 1/16W
R33	1-218-728-11	s	METAL 33K 0.50% 1/16W
R34	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R35	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R36	1-218-740-11	s	METAL 100K 0.50% 1/16W
R37	1-218-740-11	s	METAL 100K 0.50% 1/16W
R38	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R39	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R40	1-218-740-11	s	METAL 100K 0.50% 1/16W
R41	1-218-740-11	s	METAL 100K 0.50% 1/16W
R42	1-218-744-11	s	METAL 150K 0.50% 1/16W
R43	1-218-716-11	s	METAL 10K 0.50% 1/16W
R44	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R45	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R46	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R47	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R49	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R51	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R52	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R53	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R54	1-218-725-11	s	METAL 24K 0.50% 1/16W
R55	1-218-712-11	s	CHIP, METAL 6.8K 0.50% 1/16W
R56	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R57	1-218-740-11	s	METAL 100K 0.50% 1/16W
R58	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R59	1-218-723-11	s	METAL 20K 0.50% 1/16W
R61	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R62	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R63	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R64	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R65	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R66	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R67	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R68	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W

MX-59 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8273-212-A	o	MOUNTED CIRCUIT BOARD, MX-59
1pc	3-602-407-01	o	PANEL,MX-59 PC BOARD
1pc	3-724-753-01	o	RING
5pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)
C1	1-135-149-21	s	TANTALUM, CHIP 2.2uF 10% 10V
C2	1-135-149-21	s	TANTALUM, CHIP 2.2uF 10% 10V
C3	1-164-156-11	s	CERAMIC 0.1uF 25V
C4	1-164-156-11	s	CERAMIC 0.1uF 25V
C5	1-164-156-11	s	CERAMIC 0.1uF 25V
C8	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C11	1-164-156-11	s	CERAMIC 0.1uF 25V
C12	1-164-156-11	s	CERAMIC 0.1uF 25V
C13	1-104-911-11	s	TANTALUM, CHIP 33uF 20% 10V
C14	1-104-911-11	s	TANTALUM, CHIP 33uF 20% 10V
C16	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C17	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C18	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C19	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C20	1-164-156-11	s	CERAMIC 0.1uF 25V
C21	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C22	1-164-156-11	s	CERAMIC 0.1uF 25V
C23	1-164-156-11	s	CERAMIC 0.1uF 25V
C26	1-104-911-11	s	TANTALUM, CHIP 33uF 20% 10V
C27	1-104-911-11	s	TANTALUM, CHIP 33uF 20% 10V
C29	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C30	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C32	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C33	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C34	1-164-156-11	s	CERAMIC 0.1uF 25V
C35	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C102	1-164-156-11	s	CERAMIC 0.1uF 25V
C103	1-164-156-11	s	CERAMIC 0.1uF 25V
C104	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C105	1-162-907-11	s	CERAMIC, CHIP 2PF 50V
C106	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C107	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C108	1-164-156-11	s	CERAMIC 0.1uF 25V
C109	1-104-912-11	s	CHIP,TANTALUM 3.3uF 20% 16V
C110	1-164-156-11	s	CERAMIC 0.1uF 25V
C111	1-164-156-11	s	CERAMIC 0.1uF 25V
C112	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C113	1-164-156-11	s	CERAMIC 0.1uF 25V
C114	1-164-156-11	s	CERAMIC 0.1uF 25V
C115	1-135-210-11	s	TANTALUM 4.7uF 10% 10V
C116	1-164-156-11	s	CERAMIC 0.1uF 25V
C117	1-164-156-11	s	CERAMIC 0.1uF 25V
C118	1-162-907-11	s	CERAMIC, CHIP 2PF 50V
C119	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C120	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C121	1-164-156-11	s	CERAMIC 0.1uF 25V
C122	1-164-156-11	s	CERAMIC 0.1uF 25V
C123	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C125	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C126	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C127	1-164-156-11	s	CERAMIC 0.1uF 25V
C128	1-164-156-11	s	CERAMIC 0.1uF 25V
C129	1-164-156-11	s	CERAMIC 0.1uF 25V
C131	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C132	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V

(PS-400 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R90	1-216-663-11	s	METAL, CHIP 3.3K 0.5% 1/10W
R91	1-218-755-11	s	METAL, CHIP 130K 0.50% 1/10W
R92	1-216-663-11	s	METAL, CHIP 3.3K 0.5% 1/10W
R93	1-216-663-11	s	METAL, CHIP 3.3K 0.5% 1/10W
R94	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W
R95	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W
R96	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W
R97	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W
R98	1-216-611-11	s	CHIP, METAL 22 0.50% 1/10W
R99	1-216-611-11	s	CHIP, METAL 22 0.50% 1/10W
R100	1-216-611-11	s	CHIP, METAL 22 0.50% 1/10W
R101	1-216-611-11	s	CHIP, METAL 22 0.50% 1/10W
R102	1-216-611-11	s	CHIP, METAL 22 0.50% 1/10W
R103	1-216-638-11	s	METAL 300 0.50% 1/10W
R104	1-216-692-11	s	CHIP, METAL 51K 0.50% 1/10W
R105	1-216-665-11	s	METAL, CHIP 3.9K 0.5% 1/10W
R106	1-216-660-11	s	METAL 2.4K 0.50% 1/10W
R107	1-216-663-11	s	METAL, CHIP 3.3K 0.5% 1/10W
R108	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
R109	1-216-687-11	s	METAL, CHIP 33K 0.5% 1/10W
R110	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W
R111	1-216-683-11	s	CHIP, METAL 22K 0.50% 1/10W
R112	1-216-634-11	s	CHIP, METAL 200 0.50% 1/10W
R113	1-216-669-11	s	METAL, CHIP 5.6K 0.5% 1/10W
R114	1-216-669-11	s	METAL, CHIP 5.6K 0.5% 1/10W
R115	1-216-656-11	s	METAL 1.6K 0.50% 1/10W
R116	1-208-784-11	s	CHIP, METAL 1.2K 0.50% 1/10W
R117	1-216-669-11	s	METAL, CHIP 5.6K 0.5% 1/10W
R118	1-216-665-11	s	METAL, CHIP 3.9K 0.5% 1/10W
R119	1-216-649-11	s	CHIP, METAL 820 0.50% 1/10W
R120	1-216-635-11	s	METAL, CHIP 220 0.5% 1/10W
R121	1-216-635-11	s	METAL, CHIP 220 0.5% 1/10W
R122	1-216-649-11	s	CHIP, METAL 820 0.50% 1/10W
R123	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W
R124	1-216-663-11	s	METAL, CHIP 3.3K 0.5% 1/10W
R125	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
R126	1-216-657-11	s	METAL, CHIP 1.8K 0.5% 1/10W
R127	1-216-687-11	s	METAL, CHIP 33K 0.5% 1/10W
R128	1-216-611-11	s	CHIP, METAL 22 0.50% 1/10W
R129	1-216-683-11	s	CHIP, METAL 22K 0.50% 1/10W
R130	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
R131	1-216-687-11	s	METAL, CHIP 33K 0.5% 1/10W
R132	1-216-683-11	s	CHIP, METAL 22K 0.50% 1/10W
R150	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
R151	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
R154	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W
R160	1-216-635-11	s	METAL, CHIP 220 0.5% 1/10W
R161	1-216-676-11	s	CHIP, METAL 11K 0.50% 1/10W
R162	1-216-668-11	s	METAL, CHIP 5.1K 0.5% 1/10W
R163	1-216-665-11	s	METAL, CHIP 3.9K 0.5% 1/10W
R164	1-216-649-11	s	CHIP, METAL 820 0.50% 1/10W
R165	1-216-635-11	s	METAL, CHIP 220 0.5% 1/10W
R166	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
R167	1-216-687-11	s	METAL, CHIP 33K 0.5% 1/10W
R168	1-216-683-11	s	CHIP, METAL 22K 0.50% 1/10W
R169	1-216-691-11	s	CHIP, METAL 47K 0.50% 1/10W
R170	1-216-683-11	s	CHIP, METAL 22K 0.50% 1/10W

PS-401 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8273-136-A	o	MOUNTED CIRCUIT BOARD, PS-401
1pc	2-250-541-00	s	SUPPORT (A), PC BOARD
1pc	7-621-770-87	s	SCREW +B 2.6X5
1pc	1-562-579-21	s	PLUG, SHORTING
C1	1-137-105-11	s	FILM 0.01uF 20% 250
C2	⚠ 1-113-907-51	s	CERAMIC 0.0022uF 20% 250
C4	⚠ 1-113-907-51	s	CERAMIC 0.0022uF 20% 250
C5	1-113-711-11	s	ELECT 330uF 20% 450Vv
C6	1-126-405-11	s	ELECT 10uF 20% 50V
C7	1-163-038-00	s	CHIP, CERAMIC 0.1uF 25V
C8	1-163-009-11	s	CERAMIC, CHIP 0.001uF 10% 50V
C9	1-163-038-00	s	CHIP, CERAMIC 0.1uF 25V
C10	1-163-038-00	s	CHIP, CERAMIC 0.1uF 25V
C11	1-110-519-11	s	ELECT 4.7uF 20% 400V
C12	⚠ 1-113-903-11	s	ELECT 0.001uF 20% 250V
C13	⚠ 1-113-903-11	s	ELECT 0.001uF 20% 250V
C14	1-163-009-11	s	CERAMIC, CHIP 0.001uF 10% 50V
C15	1-163-009-11	s	CERAMIC, CHIP 0.001uF 10% 50V
C16	1-127-530-11	s	ELECT 22uF 20% 20V
C17	1-163-038-00	s	CHIP, CERAMIC 0.1uF 25V
C18	1-163-009-11	s	CERAMIC, CHIP 0.001uF 10% 50V
C19	1-163-009-11	s	CERAMIC, CHIP 0.001uF 10% 50V
C20	1-163-038-00	s	CHIP, CERAMIC 0.1uF 25V
C21	1-107-910-11	s	ELECT 100uF 20% 50V
C22	1-163-038-00	s	CHIP, CERAMIC 0.1uF 25V
C23	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C24	1-163-131-00	s	CERAMIC, CHIP 390PF 5% 50V
C25	1-107-689-21	s	TANTAL 1uF 20% 35V
C26	1-128-526-11	s	ELECT 100uF 20% 25V
C27	1-128-526-11	s	ELECT 100uF 20% 25V
C28	1-163-038-00	s	CHIP, CERAMIC 0.1uF 25V
C29	1-163-038-00	s	CHIP, CERAMIC 0.1uF 25V
C30	1-163-038-00	s	CHIP, CERAMIC 0.1uF 25V
C31	1-107-823-11	s	CHIP, CERAMIC 0.47uF 10% 16V
C32	1-107-823-11	s	CHIP, CERAMIC 0.47uF 10% 16V
C33	1-110-519-11	s	ELECT 4.7uF 20% 400V
C34	1-110-519-11	s	ELECT 4.7uF 20% 400V
C35	1-104-664-11	s	ELECT 47uF 20% 25V
C36	1-104-664-11	s	ELECT 47uF 20% 25V
C37	1-110-519-11	s	ELECT 4.7uF 20% 400V
C38	1-163-038-00	s	CHIP, CERAMIC 0.1uF 25V
CB1	⚠ 1-533-518-21	s	BREAKER, CIRCUIT 3.15A 250V
CN1	1-564-104-00	o	PIN, CONNECTOR (B3P-VH) 3P
CN2	1-564-104-00	o	PIN, CONNECTOR (B3P-VH) 3P
CN3	1-580-561-11	o	PIN, CONNECTOR 12P
CN4	1-564-947-11	s	CONNECTOR, 2P, MALE
CP1	⚠ 1-473-667-11	s	CONVERTER UNIT, DC-DC
CP2	⚠ 8-749-010-64	s	PHOTO COUPLER TLP123F2
D1	8-719-000-20	s	THYRISTOR BCR10CM-12L
D2	8-719-940-59	s	DIODE DBB10G
D3	8-719-106-52	s	DIODE RD10M-B1
D4	8-719-157-36	s	DIODE RD6.8M-B
D5	8-719-024-81	s	DIODE 1SS300-TE85L
D6	8-719-106-52	s	DIODE RD10M-B1
D7	8-719-300-70	s	DIODE RH-1B
D8	8-719-051-05	s	DIODE EC10QS06-TE12L5
D9	8-719-051-05	s	DIODE EC10QS06-TE12L5

(PS-401 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D12	8-759-147-47	s	IC UPC1093T
D13	8-719-300-70	s	DIODE RH-1B
D14	8-719-300-70	s	DIODE RH-1B
F1 ⚠	1-532-808-11	s	FUSE, RESISTOR TEMPERATURE 2A 250V
FB1	1-535-178-00	s	RES, FERRITE
IC1	8-759-060-66	s	IC TLC393CPS
IC2	8-759-060-66	s	IC TLC393CPS
IC3	8-759-937-36	s	IC TL1451ACNS
L1	1-408-142-21	s	INDUCTOR MICRO 22.5mH
L2	1-543-601-11	s	BEAD, FERRITE
L3	1-412-474-11	s	COIL, CHOKE 1.2mH
L4	1-412-474-11	s	COIL, CHOKE 1.2mH
PH1 ⚠	8-719-820-89	s	FPHOTO COUPLER TLP560J
Q1	8-729-142-57	s	TRANSISTOR 2SC3632-Z
Q2	8-729-026-82	s	TRANSISTOR 2SK1690
Q3	8-729-142-56	s	TRANSISTOR 2SA1413-Z
Q4	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q5	8-729-216-22	s	TRANSISTOR 2SA1162
Q6	8-729-037-97	s	TRANSISTOR 2SJ356-E2
R1	1-220-325-11	s	CHIP, METAL 1M 5% 1/4W
R2	1-220-325-11	s	CHIP, METAL 1M 5% 1/4W
R3	1-220-325-11	s	CHIP, METAL 1M 5% 1/4W
R4	1-220-325-11	s	CHIP, METAL 1M 5% 1/4W
R5	1-218-628-11	s	CHIP, METAL 150 5% 1W
R6	1-216-651-11	s	METAL, CHIP 1K 0.5% 1/10W
R7	1-220-313-11	s	CHIP, METAL 100K 5% 1/4W
R8	1-220-317-11	s	CHIP, METAL 220K 5% 1/4W
R9	1-216-684-11	s	CHIP, METAL 24K 0.50% 1/10W
R10	1-216-697-91	s	CHIP, METAL 82K 0.50% 1/10W
R11	1-216-673-11	s	METAL, CHIP 8.2K 0.5% 1/10W
R12	1-216-682-11	s	METAL, CHIP 20K 0.5% 1/10W
R13	1-220-325-11	s	CHIP, METAL 1M 5% 1/4W
R14	1-220-348-11	s	CHIP, METAL 2.2M 5% 1/4W
R16	1-216-699-11	s	CHIP, METAL 100K 0.50% 1/10W
R17	1-220-293-11	s	CHIP, METAL 47K 5% 1/4W
R18	1-220-293-11	s	CHIP, METAL 47K 5% 1/4W
R19	1-220-293-11	s	CHIP, METAL 47K 5% 1/4W
R20	1-220-293-11	s	CHIP, METAL 47K 5% 1/4W
R21	1-216-295-11	s	CHIP, CONDUCTOR 0
R22	1-216-689-11	s	CHIP, METAL 39K 0.50% 1/10W
R23	1-216-642-11	s	METAL, CHIP 430 0.5% 1/10W
R24	1-216-692-11	s	CHIP, METAL 51K 0.50% 1/10W
R25	1-216-655-11	s	CHIP, METAL 1.5K 0.50% 1/10W
R26	1-216-682-11	s	METAL, CHIP 20K 0.5% 1/10W
R27	1-218-614-11	s	CHIP, METAL 10 5% 1W
R28	1-216-699-11	s	CHIP, METAL 100K 0.50% 1/10W
R29	1-216-682-11	s	METAL, CHIP 20K 0.5% 1/10W
R30	1-216-651-11	s	METAL, CHIP 1K 0.5% 1/10W
R31	1-216-651-11	s	METAL, CHIP 1K 0.5% 1/10W
R32	1-216-660-11	s	METAL 2.4K 0.50% 1/10W
R33	1-216-665-11	s	METAL, CHIP 3.9K 0.5% 1/10W
R34	1-216-666-11	s	METAL, CHIP 4.3K 0.5% 1/10W
R35	1-216-647-11	s	METAL, CHIP 680 0.5% 1/10W
R36	1-216-676-11	s	CHIP, METAL 11K 0.50% 1/10W
R37	1-216-637-11	s	METAL, CHIP 270 0.5% 1/10W

(PS-401 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R38	1-216-672-11	s	METAL, CHIP 7.5K 0.5% 1/10W
R39	1-216-611-11	s	CHIP, METAL 22 0.50% 1/10W
R40	1-216-686-11	s	CHIP, METAL 30K 0.50% 1/10W
R41	1-216-658-11	s	METAL, CHIP 2K 0.5% 1/10W
R42	1-216-674-11	s	METAL, CHIP 9.1K 0.5% 1/10W
R43	1-216-699-11	s	CHIP, METAL 100K 0.50% 1/10W
R44	1-216-683-11	s	CHIP, METAL 22K 0.50% 1/10W
R45	1-218-761-11	s	METAL 240K 0.50% 1/10W
R47	1-216-682-11	s	METAL, CHIP 20K 0.5% 1/10W
R48	1-216-682-11	s	METAL, CHIP 20K 0.5% 1/10W
R49	1-216-682-11	s	METAL, CHIP 20K 0.5% 1/10W
T1	1-421-400-00	s	COIL, LINE FILTER
T2	1-431-478-11	s	DC-DC CONVERTER

(VA-158 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C504	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C505	1-104-911-11	s	TANTALUM, CHIP 33uF 20% 10V
C506	1-104-911-11	s	TANTALUM, CHIP 33uF 20% 10V
C507	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C508	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C509	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C510	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C511	1-164-156-11	s	CERAMIC 0.1uF 25V
C513	1-164-156-11	s	CERAMIC 0.1uF 25V
C514	1-164-156-11	s	CERAMIC 0.1uF 25V
C516	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C517	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C518	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C519	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C520	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C521	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C522	1-164-156-11	s	CERAMIC 0.1uF 25V
C523	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C524	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C525	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C526	1-135-210-11	s	TANTALUM 4.7uF 10% 10V
C527	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C528	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C529	1-135-210-11	s	TANTALUM 4.7uF 10% 10V
C530	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C531	1-135-210-11	s	TANTALUM 4.7uF 10% 10V
C532	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C533	1-164-156-11	s	CERAMIC 0.1uF 25V
C534	1-164-156-11	s	CERAMIC 0.1uF 25V
C535	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C536	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C537	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C700	1-107-689-21	s	TANTAL 1uF 20% 35V
C701	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C702	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C703	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C704	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C705	1-104-911-11	s	TANTALUM, CHIP 33uF 20% 10V
C706	1-104-911-11	s	TANTALUM, CHIP 33uF 20% 10V
C707	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C708	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C709	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C710	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C711	1-164-156-11	s	CERAMIC 0.1uF 25V
C712	1-164-156-11	s	CERAMIC 0.1uF 25V
C713	1-164-156-11	s	CERAMIC 0.1uF 25V
C714	1-164-156-11	s	CERAMIC 0.1uF 25V
C716	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C717	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C718	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C719	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C720	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C721	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C722	1-164-156-11	s	CERAMIC 0.1uF 25V
C723	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C724	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C725	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C726	1-135-210-11	s	TANTALUM 4.7uF 10% 10V
C727	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C728	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V

(VA-158 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C729	1-135-210-11	s	TANTALUM 4.7uF 10% 10V
C730	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C731	1-135-210-11	s	TANTALUM 4.7uF 10% 10V
C732	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C733	1-164-156-11	s	CERAMIC 0.1uF 25V
C734	1-164-156-11	s	CERAMIC 0.1uF 25V
C735	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C736	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C737	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C738	1-162-923-11	s	CERAMIC, CHIP 47PF 5% 50V
CN1	1-695-453-11	s	CONNECTOR, BOARD TO BOARD 50P
D1	8-719-059-52	s	DIODE MA3J14300LSO
FL300	1-233-603-21	s	FILTER (SMD), LOW PASS
FL500	1-233-603-21	s	FILTER (SMD), LOW PASS
FL700	1-233-603-21	s	FILTER (SMD), LOW PASS
IC1	8-759-066-59	s	IC TC74HC4053AFS
IC2	8-759-185-42	s	IC LM4040AIM3-2.5
IC3	8-759-195-81	s	IC TC7S86FU
IC4	8-759-195-81	s	IC TC7S86FU
IC5	8-759-173-16	s	IC TL062CPW
IC6	8-759-076-06	s	IC TL064CPW
IC7	8-759-066-59	s	IC TC74HC4053AFS
IC8	8-759-076-06	s	IC TL064CPW
IC9	8-759-066-59	s	IC TC74HC4053AFS
IC10	8-759-076-06	s	IC TL064CPW
IC11	8-759-076-06	s	IC TL064CPW
IC12	8-759-064-36	s	IC MB88346BPFV
IC13	8-759-064-36	s	IC MB88346BPFV
IC14	8-759-076-06	s	IC TL064CPW
IC15	8-759-066-59	s	IC TC74HC4053AFS
IC16	8-759-064-36	s	IC MB88346BPFV
IC17	8-759-064-36	s	IC MB88346BPFV
IC18	8-759-076-06	s	IC TL064CPW
IC19	8-759-066-59	s	IC TC74HC4053AFS
IC20	8-759-287-54	s	IC TL084CPW-E20
IC21	8-759-287-54	s	IC TL084CPW-E20
IC22	8-759-058-54	s	IC TC7S00FU(TE85R)
IC23	8-759-058-54	s	IC TC7S00FU(TE85R)
IC24	8-759-066-59	s	IC TC74HC4053AFS
IC25	8-759-066-59	s	IC TC74HC4053AFS
IC26	8-759-082-60	s	IC TC7S66FU
IC27	8-759-349-47	s	IC TLC393CPW-E05
IC28	8-759-058-55	s	IC TC7S02FU-TE85L
IC29	8-759-086-41	s	IC X24C02S-3.0
IC30	8-759-066-59	s	IC TC74HC4053AFS
IC31	8-759-195-81	s	IC TC7S86FU
IC32	8-759-058-58	s	IC TC7S04FU(TE85R)
IC33	8-759-054-61	s	IC CLC505AJE
IC34	8-759-054-61	s	IC CLC505AJE
IC35	8-759-058-62	s	IC TC7S08FU(TE85R)
IC36	8-759-064-36	s	IC MB88346BPFV
IC37	8-759-059-50	s	IC MB88351PFV
IC38	8-759-058-62	s	IC TC7S08FU(TE85R)
IC39	8-759-058-62	s	IC TC7S08FU(TE85R)
IC40	8-759-058-62	s	IC TC7S08FU(TE85R)
IC41	8-759-058-62	s	IC TC7S08FU(TE85R)
IC42	8-759-058-62	s	IC TC7S08FU(TE85R)

(VA-158 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC43	8-759-147-84	s	IC CXD8072Q
IC300	8-759-054-61	s	IC CLC505AJE
IC301	8-759-066-59	s	IC TC74HC4053AFS
IC302	8-759-173-16	s	IC TL062CPW
IC303	8-759-058-58	s	IC TC7S04FU(TE85R)
IC304	8-759-058-58	s	IC TC7S04FU(TE85R)
IC305	8-759-054-61	s	IC CLC505AJE
IC306	8-759-173-16	s	IC TL062CPW
IC307	8-759-058-54	s	IC TC7S00FU(TE85R)
IC308	8-752-052-73	s	IC CXA1451M
IC309	8-759-030-49	s	IC MC1495M
IC310	8-759-054-61	s	IC CLC505AJE
IC500	8-759-054-61	s	IC CLC505AJE
IC501	8-759-066-59	s	IC TC74HC4053AFS
IC502	8-759-173-16	s	IC TL062CPW
IC503	8-759-058-58	s	IC TC7S04FU(TE85R)
IC505	8-759-054-61	s	IC CLC505AJE
IC506	8-759-173-16	s	IC TL062CPW
IC507	8-759-058-54	s	IC TC7S00FU(TE85R)
IC508	8-752-052-73	s	IC CXA1451M
IC509	8-759-030-49	s	IC MC1495M
IC510	8-759-054-61	s	IC CLC505AJE
IC700	8-759-054-61	s	IC CLC505AJE
IC701	8-759-066-59	s	IC TC74HC4053AFS
IC702	8-759-173-16	s	IC TL062CPW
IC703	8-759-058-58	s	IC TC7S04FU(TE85R)
IC705	8-759-054-61	s	IC CLC505AJE
IC706	8-759-173-16	s	IC TL062CPW
IC707	8-759-058-54	s	IC TC7S00FU(TE85R)
IC708	8-752-052-73	s	IC CXA1451M
IC709	8-759-030-49	s	IC MC1495M
IC710	8-759-054-61	s	IC CLC505AJE
Q1	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q2	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q3	8-729-820-90	s	TRANSISTOR 2SD1621-ST
Q4	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q5	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q6	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q7	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q8	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q9	8-729-928-90	s	TRANSISTOR DTC114EE
Q10	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q11	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q12	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q13	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q14	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q15	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q16	8-729-928-36	s	TRANSISTOR DTA114EE
Q17	8-729-928-36	s	TRANSISTOR DTA114EE
Q18	8-729-928-36	s	TRANSISTOR DTA114EE
Q300	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q301	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q302	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q303	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q304	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q305	8-769-401-67	s	TRANSISTOR 3SK163-1
Q306	8-769-401-67	s	TRANSISTOR 3SK163-1
Q307	8-769-401-67	s	TRANSISTOR 3SK163-1

(VA-158 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q308	8-769-401-67	s	TRANSISTOR 3SK163-1
Q309	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q310	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q500	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q501	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q502	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q503	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q504	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q506	8-769-401-67	s	TRANSISTOR 3SK163-1
Q507	8-769-401-67	s	TRANSISTOR 3SK163-1
Q508	8-769-401-67	s	TRANSISTOR 3SK163-1
Q509	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q510	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q700	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q701	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q702	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q703	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q704	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q705	8-769-401-67	s	TRANSISTOR 3SK163-1
Q706	8-769-401-67	s	TRANSISTOR 3SK163-1
Q707	8-769-401-67	s	TRANSISTOR 3SK163-1
Q708	8-769-401-67	s	TRANSISTOR 3SK163-1
Q709	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q710	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
R1	1-218-740-11	s	METAL 100K 0.50% 1/16W
R2	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R3	1-218-740-11	s	METAL 100K 0.50% 1/16W
R4	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R5	1-218-740-11	s	METAL 100K 0.50% 1/16W
R6	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R7	1-218-716-11	s	METAL 10K 0.50% 1/16W
R8	1-218-740-11	s	METAL 100K 0.50% 1/16W
R9	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R10	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R11	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R12	1-218-740-11	s	METAL 100K 0.50% 1/16W
R13	1-218-716-11	s	METAL 10K 0.50% 1/16W
R14	1-218-716-11	s	METAL 10K 0.50% 1/16W
R15	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R16	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R17	1-218-733-11	s	CHIP, METAL 51K 0.50% 1/16W
R18	1-218-733-11	s	CHIP, METAL 51K 0.50% 1/16W
R20	1-218-740-11	s	METAL 100K 0.50% 1/16W
R21	1-218-740-11	s	METAL 100K 0.50% 1/16W
R22	1-218-693-11	s	CHIP, METAL 1.1K 0.50% 1/16W
R23	1-216-857-11	s	METAL, CHIP 1M 5% 1/16W
R24	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R25	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R26	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R27	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R28	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R29	1-218-870-11	s	CHIP, METAL 9.1K 0.50% 1/16W
R30	1-218-870-11	s	CHIP, METAL 9.1K 0.50% 1/16W
R31	1-218-732-11	s	METAL 47K 0.50% 1/16W
R32	1-216-853-11	s	METAL, CHIP 470K 5% 1/16W
R33	1-218-733-11	s	CHIP, METAL 51K 0.50% 1/16W
R34	1-218-733-11	s	CHIP, METAL 51K 0.50% 1/16W
R35	1-218-740-11	s	METAL 100K 0.50% 1/16W
R36	1-218-740-11	s	METAL 100K 0.50% 1/16W

(VA-158 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R529	1-218-716-11	s	METAL 10K 0.50% 1/16W
R530	1-218-716-11	s	METAL 10K 0.50% 1/16W
R531	1-218-746-11	s	METAL 180K 0.50% 1/16W
R532	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R533	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R534	1-218-676-11	s	METAL 220 0.50% 1/16W
R535	1-218-735-11	s	CHIP, METAL 62K 0.50% 1/16W
R536	1-218-727-11	s	METAL 30K 0.50% 1/16W
R537	1-218-686-11	s	METAL 560 0.50% 1/16W
R538	1-218-674-11	s	METAL 180 0.50% 1/16W
R539	1-218-684-11	s	CHIP, METAL 470 0.50% 1/16W
R540	1-218-687-11	s	CHIP, METAL 620 0.50% 1/16W
R541	1-218-701-11	s	METAL 2.4K 0.50% 1/16W
R542	1-218-747-11	s	METAL 200K 0.50% 1/16W
R543	1-218-735-11	s	CHIP, METAL 62K 0.50% 1/16W
R544	1-218-716-11	s	METAL 10K 0.50% 1/16W
R545	1-218-716-11	s	METAL 10K 0.50% 1/16W
R546	1-218-716-11	s	METAL 10K 0.50% 1/16W
R547	1-218-685-11	s	METAL 510 0.50% 1/16W
R548	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R549	1-218-723-11	s	METAL 20K 0.50% 1/16W
R550	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R551	1-218-723-11	s	METAL 20K 0.50% 1/16W
R552	1-218-716-11	s	METAL 10K 0.50% 1/16W
R553	1-218-716-11	s	METAL 10K 0.50% 1/16W
R554	1-218-713-11	s	CHIP, METAL 7.5K 0.50% 1/16W
R555	1-218-727-11	s	METAL 30K 0.50% 1/16W
R556	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R557	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R558	1-218-694-11	s	CHIP, METAL 1.2K 0.50% 1/16W
R559	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R560	1-218-682-11	s	METAL 390 0.50% 1/16W
R561	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R562	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R563	1-218-716-11	s	METAL 10K 0.50% 1/16W
R564	1-218-676-11	s	METAL 220 0.50% 1/16W
R565	1-218-686-11	s	METAL 560 0.50% 1/16W
R566	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R567	1-218-723-11	s	METAL 20K 0.50% 1/16W
R568	1-218-716-11	s	METAL 10K 0.50% 1/16W
R569	1-218-727-11	s	METAL 30K 0.50% 1/16W
R570	1-218-714-11	s	METAL 8.2K 0.50% 1/16W
R571	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R572	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R573	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R574	1-218-644-11	s	METAL 10 0.50% 1/16W
R700	1-218-744-11	s	CHIP, METAL 150K 0.50% 1/16W
R701	1-218-694-11	s	CHIP, METAL 1.2K 0.50% 1/16W
R702	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R703	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R704	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R705	1-218-716-11	s	METAL 10K 0.50% 1/16W
R706	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R707	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R708	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R709	1-218-676-11	s	METAL 220 0.50% 1/16W
R710	1-218-713-11	s	CHIP, METAL 7.5K 0.50% 1/16W
R711	1-218-698-11	s	METAL 1.8K 0.50% 1/16W
R712	1-218-697-11	s	METAL 1.6K 0.50% 1/16W

(VA-158 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R713	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R714	1-218-717-11	s	CHIP, METAL 11K 0.50% 1/16W
R715	1-218-707-11	s	CHIP, METAL 4.3K 0.50% 1/16W
R716	1-218-680-11	s	METAL 330 0.50% 1/16W
R718	1-218-663-11	s	METAL 62 0.50% 1/16W
R719	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R720	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R721	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R722	1-218-733-11	s	CHIP, METAL 51K 0.50% 1/16W
R723	1-218-682-11	s	METAL 390 0.50% 1/16W
R724	1-218-733-11	s	CHIP, METAL 51K 0.50% 1/16W
R725	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R726	1-218-645-11	s	CHIP, METAL 11 0.50% 1/16W
R727	1-218-682-11	s	METAL 390 0.50% 1/16W
R728	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R729	1-218-716-11	s	METAL 10K 0.50% 1/16W
R730	1-218-716-11	s	METAL 10K 0.50% 1/16W
R731	1-218-746-11	s	METAL 180K 0.50% 1/16W
R732	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R733	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R734	1-218-676-11	s	METAL 220 0.50% 1/16W
R735	1-218-735-11	s	CHIP, METAL 62K 0.50% 1/16W
R736	1-218-727-11	s	METAL 30K 0.50% 1/16W
R737	1-218-686-11	s	METAL 560 0.50% 1/16W
R738	1-218-674-11	s	METAL 180 0.50% 1/16W
R739	1-218-684-11	s	CHIP, METAL 470 0.50% 1/16W
R740	1-218-687-11	s	CHIP, METAL 620 0.50% 1/16W
R741	1-218-701-11	s	METAL 2.4K 0.50% 1/16W
R742	1-218-747-11	s	METAL 200K 0.50% 1/16W
R743	1-218-735-11	s	CHIP, METAL 62K 0.50% 1/16W
R744	1-218-716-11	s	METAL 10K 0.50% 1/16W
R745	1-218-716-11	s	METAL 10K 0.50% 1/16W
R746	1-218-716-11	s	METAL 10K 0.50% 1/16W
R747	1-218-685-11	s	METAL 510 0.50% 1/16W
R748	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R749	1-218-723-11	s	METAL 20K 0.50% 1/16W
R750	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R751	1-218-723-11	s	METAL 20K 0.50% 1/16W
R752	1-218-716-11	s	METAL 10K 0.50% 1/16W
R753	1-218-716-11	s	METAL 10K 0.50% 1/16W
R754	1-218-713-11	s	CHIP, METAL 7.5K 0.50% 1/16W
R755	1-218-727-11	s	METAL 30K 0.50% 1/16W
R756	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R757	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R758	1-218-694-11	s	CHIP, METAL 1.2K 0.50% 1/16W
R759	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R760	1-218-682-11	s	METAL 390 0.50% 1/16W
R761	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R762	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R763	1-218-716-11	s	METAL 10K 0.50% 1/16W
R764	1-218-676-11	s	METAL 220 0.50% 1/16W
R765	1-218-686-11	s	METAL 560 0.50% 1/16W
R766	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R767	1-218-723-11	s	METAL 20K 0.50% 1/16W
R768	1-218-716-11	s	METAL 10K 0.50% 1/16W
R769	1-218-727-11	s	METAL 30K 0.50% 1/16W
R770	1-218-714-11	s	METAL 8.2K 0.50% 1/16W
R771	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R772	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W

(VA-158 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R773	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R774	1-218-644-11	s	METAL 10 0.50% 1/16W
R775	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
RV300	1-241-260-11	s	METAL, ADJ 500
RV500	1-241-260-11	s	METAL, ADJ 500
RV700	1-241-260-11	s	METAL, ADJ 500

VDA-31 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8273-138-A	o	MOUNTED CIRCUIT BOARD, VDA-31 (W/DU-24 MOUNTED CIRCUIT BOARD)
1pc	3-602-438-01	o	PANEL,VDA-31 PC BOARD
1pc	3-724-753-01	o	RING
6pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)
C1	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C3	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C4	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C5	1-164-156-11	s	CERAMIC 0.1uF 25V
C6	1-164-156-11	s	CERAMIC 0.1uF 25V
C7	1-104-823-11	s	TANTALUM, CHIP 47uF 20% 16V
C8	1-104-823-11	s	TANTALUM, CHIP 47uF 20% 16V
C9	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C10	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C11	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C12	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C13	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C14	1-164-156-11	s	CERAMIC 0.1uF 25V
C15	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C16	1-162-957-11	s	CERAMIC, CHIP 220PF 5% 50V
C17	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C18	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C101	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C102	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C103	1-164-156-11	s	CERAMIC 0.1uF 25V
C104	1-164-156-11	s	CERAMIC 0.1uF 25V
C105	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C106	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C111	1-164-156-11	s	CERAMIC 0.1uF 25V
C112	1-164-156-11	s	CERAMIC 0.1uF 25V
C113	1-162-908-11	s	CERAMIC 3PF 0.25PF 50V
C114	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C115	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C116	1-164-156-11	s	CERAMIC 0.1uF 25V
C117	1-164-156-11	s	CERAMIC 0.1uF 25V
C118	1-162-908-11	s	CERAMIC 3PF 0.25PF 50V
C119	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C120	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C121	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C122	1-135-091-00	s	TANTALUM, CHIP 1uF 20% 16V
C124	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C126	1-162-963-11	s	CERAMIC, CHIP 680PF 10% 50V
C127	1-162-909-11	s	CERAMIC 4PF 0.25PF 50V
C128	1-162-921-11	s	CERAMIC, CHIP 33PF 5% 50V
C201	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C202	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C203	1-164-156-11	s	CERAMIC 0.1uF 25V
C204	1-164-156-11	s	CERAMIC 0.1uF 25V
C205	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C206	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C207	1-164-156-11	s	CERAMIC 0.1uF 25V
C208	1-164-156-11	s	CERAMIC 0.1uF 25V
C209	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C210	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C211	1-164-156-11	s	CERAMIC 0.1uF 25V
C212	1-164-156-11	s	CERAMIC 0.1uF 25V
C213	1-162-907-11	s	CERAMIC, CHIP 2PF 50V

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C214	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C215	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C216	1-164-156-11	s	CERAMIC 0.1uF 25V
C217	1-164-156-11	s	CERAMIC 0.1uF 25V
C218	1-162-908-11	s	CERAMIC 3PF 0.25PF 50V
C219	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C220	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C221	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C222	1-135-091-00	s	TANTALUM, CHIP 1uF 20% 16V
C224	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C226	1-162-963-11	s	CERAMIC, CHIP 680PF 10% 50V
C227	1-162-909-11	s	CERAMIC 4PF 0.25PF 50V
C228	1-162-921-11	s	CERAMIC, CHIP 33PF 5% 50V
C301	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C302	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C303	1-164-156-11	s	CERAMIC 0.1uF 25V
C304	1-164-156-11	s	CERAMIC 0.1uF 25V
C305	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C306	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C311	1-164-156-11	s	CERAMIC 0.1uF 25V
C312	1-164-156-11	s	CERAMIC 0.1uF 25V
C313	1-162-908-11	s	CERAMIC 3PF 0.25PF 50V
C314	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C315	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C316	1-164-156-11	s	CERAMIC 0.1uF 25V
C317	1-164-156-11	s	CERAMIC 0.1uF 25V
C318	1-162-908-11	s	CERAMIC 3PF 0.25PF 50V
C319	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C320	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C321	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C322	1-135-091-00	s	TANTALUM, CHIP 1uF 20% 16V
C324	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C326	1-162-963-11	s	CERAMIC, CHIP 680PF 10% 50V
C327	1-162-909-11	s	CERAMIC 4PF 0.25PF 50V
C328	1-162-921-11	s	CERAMIC, CHIP 33PF 5% 50V
C401	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C402	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C403	1-162-965-11	s	CERAMIC 0.0015uF 10% 50V
C404	1-162-965-11	s	CERAMIC 0.0015uF 10% 50V
C405	1-162-965-11	s	CERAMIC 0.0015uF 10% 50V
C406	1-164-156-11	s	CERAMIC 0.1uF 25V
C407	1-164-156-11	s	CERAMIC 0.1uF 25V
C408	1-164-156-11	s	CERAMIC 0.1uF 25V
C412	1-164-156-11	s	CERAMIC 0.1uF 25V
C413	1-164-156-11	s	CERAMIC 0.1uF 25V
C414	1-164-156-11	s	CERAMIC 0.1uF 25V
C415	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C416	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C417	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C418	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C419	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C420	1-164-156-11	s	CERAMIC 0.1uF 25V
C421	1-164-156-11	s	CERAMIC 0.1uF 25V
C422	1-164-156-11	s	CERAMIC 0.1uF 25V
C424	1-164-156-11	s	CERAMIC 0.1uF 25V
C426	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C427	1-164-156-11	s	CERAMIC 0.1uF 25V
C428	1-164-156-11	s	CERAMIC 0.1uF 25V
C429	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C431	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C501	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C502	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C503	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C504	1-164-156-11	s	CERAMIC 0.1uF 25V
C505	1-164-156-11	s	CERAMIC 0.1uF 25V
C506	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C507	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C508	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C509	1-164-156-11	s	CERAMIC 0.1uF 25V
C510	1-164-156-11	s	CERAMIC 0.1uF 25V
C511	1-162-915-11	s	CERAMIC, CHIP 10PF 5PF 50V
C512	1-164-156-11	s	CERAMIC 0.1uF 25V
C515	1-164-156-11	s	CERAMIC 0.1uF 25V
C516	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C517	1-164-156-11	s	CERAMIC 0.1uF 25V
C518	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C519	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C520	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C521	1-164-156-11	s	CERAMIC 0.1uF 25V
C522	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C523	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C524	1-164-156-11	s	CERAMIC 0.1uF 25V
C525	1-164-156-11	s	CERAMIC 0.1uF 25V
C526	1-164-156-11	s	CERAMIC 0.1uF 25V
C527	1-164-156-11	s	CERAMIC 0.1uF 25V
C528	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C529	1-164-156-11	s	CERAMIC 0.1uF 25V
C530	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C531	1-164-156-11	s	CERAMIC 0.1uF 25V
C532	1-164-156-11	s	CERAMIC 0.1uF 25V
C533	1-164-156-11	s	CERAMIC 0.1uF 25V
C534	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C535	1-162-965-11	s	CERAMIC 0.0015uF 10% 50V
C536	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C537	1-164-156-11	s	CERAMIC 0.1uF 25V
C538	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C539	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C541	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C542	1-164-156-11	s	CERAMIC 0.1uF 25V
C544	1-164-156-11	s	CERAMIC 0.1uF 25V
C546	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C547	1-164-156-11	s	CERAMIC 0.1uF 25V
C548	1-164-156-11	s	CERAMIC 0.1uF 25V
C549	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C550	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C551	1-164-156-11	s	CERAMIC 0.1uF 25V
C555	1-162-957-11	s	CERAMIC 220PF 5% 50V
C556	1-162-957-11	s	CERAMIC 220PF 5% 50V
C557	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C558	1-164-156-11	s	CERAMIC 0.1uF 25V
C559	1-164-156-11	s	CERAMIC 0.1uF 25V
C560	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C561	1-164-156-11	s	CERAMIC 0.1uF 25V
C562	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C563	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C564	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C600	1-162-923-11	s	CERAMIC, CHIP 47PF 5% 50V
C601	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C602	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C603	1-162-909-11	s	CERAMIC 4PF 0.25PF 50V

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C701	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C702	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C703	1-164-156-11	s	CERAMIC 0.1uF 25V
C704	1-164-156-11	s	CERAMIC 0.1uF 25V
C705	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C706	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C707	1-164-156-11	s	CERAMIC 0.1uF 25V
C708	1-164-156-11	s	CERAMIC 0.1uF 25V
C709	1-162-905-11	s	CERAMIC 1PF 0.25PF 50V
C710	1-162-927-11	s	CERAMIC, CHIP 100PF 5% 50V
C801	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C802	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C803	1-164-156-11	s	CERAMIC 0.1uF 25V
C804	1-164-156-11	s	CERAMIC 0.1uF 25V
C805	1-164-156-11	s	CERAMIC 0.1uF 25V
CN101	1-569-301-11	s	PIN, CONNECTOR (PC BOARD) 5P
CN102	1-569-301-11	s	PIN, CONNECTOR (PC BOARD) 5P
CN301	1-569-301-11	s	PIN, CONNECTOR (PC BOARD) 5P
CN302	1-569-301-11	s	PIN, CONNECTOR (PC BOARD) 5P
D1	8-719-059-52	s	DIODE MA3J14300LSO
D501	8-719-421-27	s	DIODE MA728
D502	8-719-421-27	s	DIODE MA728
D503	8-719-421-27	s	DIODE MA728
D504	8-719-059-52	s	DIODE MA3J14300LSO
D505	8-719-059-52	s	DIODE MA3J14300LSO
D601	8-719-059-52	s	DIODE MA3J14300LSO
DL101	1-415-883-11	s	DELAY LINE
DL301	1-415-883-11	s	DELAY LINE
FL101	1-233-603-21	s	FILTER (SMD), LOW PASS
FL201	1-233-603-21	s	FILTER (SMD), LOW PASS
FL301	1-233-603-21	s	FILTER (SMD), LOW PASS
FL401	1-233-604-21	s	FILTER (SMD), LOW PASS
FL402	1-233-605-21	s	FILTER (SMD), LOW PASS
FL403	1-233-604-21	s	FILTER (SMD), LOW PASS
FL701	1-233-604-21	s	FILTER (SMD), LOW PASS
FL702	1-233-604-21	s	FILTER (SMD), LOW PASS
IC1	8-759-058-62	s	IC TC7S08FU(TE85R)
IC2	8-759-058-62	s	IC TC7S08FU(TE85R)
IC3	8-759-173-16	s	IC TL062CPW
IC4	8-759-058-62	s	IC TC7S08FU(TE85R)
IC5	8-759-185-42	s	IC LM4040AIM3-2.5
IC6	8-759-058-62	s	IC TC7S08FU(TE85R)
IC7	8-759-058-62	s	IC TC7S08FU(TE85R)
IC101	8-759-054-61	s	IC CLC505AJE
IC103	8-759-054-61	s	IC CLC505AJE
IC104	8-759-066-59	s	IC TC74HC4053AFS
IC105	8-752-061-02	s	IC CXA1450M
IC106	8-759-054-61	s	IC CLC505AJE
IC201	8-759-054-61	s	IC CLC505AJE
IC202	8-759-054-61	s	IC CLC505AJE
IC203	8-759-054-61	s	IC CLC505AJE
IC204	8-759-066-59	s	IC TC74HC4053AFS
IC205	8-752-061-02	s	IC CXA1450M
IC206	8-759-054-61	s	IC CLC505AJE
IC301	8-759-054-61	s	IC CLC505AJE
IC303	8-759-054-61	s	IC CLC505AJE
IC304	8-759-066-59	s	IC TC74HC4053AFS
IC305	8-752-061-02	s	IC CXA1450M

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC306	8-759-054-61	s	IC CLC505AJE
IC401	8-759-054-61	s	IC CLC505AJE
IC402	8-759-054-61	s	IC CLC505AJE
IC403	8-759-054-61	s	IC CLC505AJE
IC404	8-759-054-61	s	IC CLC505AJE
IC405	8-759-054-61	s	IC CLC505AJE
IC406	8-759-054-61	s	IC CLC505AJE
IC501	8-759-066-59	s	IC TC74HC4053AFS
IC502	8-759-066-59	s	IC TC74HC4053AFS
IC503	8-759-054-61	s	IC CLC505AJE
IC504	8-759-066-59	s	IC TC74HC4053AFS
IC505	8-759-054-61	s	IC CLC505AJE
IC506	8-759-054-61	s	IC CLC505AJE
IC507	8-759-054-61	s	IC CLC505AJE
IC508	8-752-052-73	s	IC CXA1451M
IC509	8-759-058-62	s	IC TC7S08FU(TE85R)
IC510	8-759-058-54	s	IC TC7S00FU(TE85R)
IC511	8-759-066-59	s	IC TC74HC4053AFS
IC512	8-759-054-61	s	IC CLC505AJE
IC513	8-759-054-61	s	IC CLC505AJE
IC514	8-759-066-59	s	IC TC74HC4053AFS
IC515	8-759-066-59	s	IC TC74HC4053AFS
IC516	8-759-082-61	s	IC TC4W53FU
IC520	8-759-058-62	s	IC TC7S08FU(TE85R)
IC521	8-759-271-18	s	IC NJM1496V
IC522	8-759-173-16	s	IC TL062CPW
IC523	8-759-058-54	s	IC TC7S00FU(TE85R)
IC601	8-759-058-55	s	IC TC7S02FU-TE85L
IC602	8-759-058-64	s	IC TC7S32FU(TE85R)
IC701	8-759-054-61	s	IC CLC505AJE
IC702	8-759-054-61	s	IC CLC505AJE
IC703	8-759-066-59	s	IC TC74HC4053AFS
IC801	8-759-349-46	s	IC TLC339CPW-E05
IC802	8-759-147-84	s	IC CXD8072Q
IC803	8-759-086-41	s	IC X24C02S-3.0
IC804	8-759-058-55	s	IC TC7S02FU-TE85L
L101	1-412-026-11	s	INDUCTOR CHIP 1uH
L102	1-412-026-11	s	INDUCTOR CHIP 1uH
L401	1-412-026-11	s	INDUCTOR CHIP 1uH
L402	1-412-026-11	s	INDUCTOR CHIP 1uH
L501	1-412-026-11	s	INDUCTOR CHIP 1uH
L502	1-412-026-11	s	INDUCTOR CHIP 1uH
L701	1-412-026-11	s	INDUCTOR CHIP 1uH
L702	1-412-026-11	s	INDUCTOR CHIP 1uH
Q1	8-729-820-86	s	TRANSISTOR 2SB1121-ST
Q2	8-729-820-90	s	TRANSISTOR 2SD1621-ST
Q3	8-729-117-32	s	TRANSISTOR 2SC4177
Q4	8-729-117-16	s	TRANSISTOR 2SA1611-M6
Q101	8-765-930-08	s	TRANSISTOR 3SK163-2
Q102	8-765-930-08	s	TRANSISTOR 3SK163-2
Q201	8-765-930-08	s	TRANSISTOR 3SK163-2
Q202	8-765-930-08	s	TRANSISTOR 3SK163-2
Q301	8-765-930-08	s	TRANSISTOR 3SK163-2
Q302	8-765-930-08	s	TRANSISTOR 3SK163-2
Q501	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q502	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q503	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q504	8-729-143-07	s	TRANSISTOR 2SA1610-Y33

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q505	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q506	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q507	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q508	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q509	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q510	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q511	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q512	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q513	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q514	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q515	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q516	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q517	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q518	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q519	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q520	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q521	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q801	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q802	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q803	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q804	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q805	8-729-928-90	s	TRANSISTOR DTC114EE
R1	1-218-728-11	s	METAL 33K 0.50% 1/16W
R2	1-218-728-11	s	METAL 33K 0.50% 1/16W
R3	1-218-716-11	s	METAL 10K 0.50% 1/16W
R4	1-218-728-11	s	METAL 33K 0.50% 1/16W
R5	1-218-728-11	s	METAL 33K 0.50% 1/16W
R6	1-218-716-11	s	METAL 10K 0.50% 1/16W
R7	1-218-664-11	s	CHIP, METAL 68 0.50% 1/16W
R8	1-218-664-11	s	CHIP, METAL 68 0.50% 1/16W
R9	1-218-676-11	s	METAL 220 0.50% 1/16W
R10	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R11	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R12	1-218-676-11	s	METAL 220 0.50% 1/16W
R13	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R14	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R15	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R16	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R17	1-218-716-11	s	METAL 10K 0.50% 1/16W
R18	1-218-728-11	s	METAL 33K 0.50% 1/16W
R19	1-218-716-11	s	METAL 10K 0.50% 1/16W
R20	1-218-716-11	s	METAL 10K 0.50% 1/16W
R21	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R22	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R23	1-218-701-11	s	METAL 2.4K 0.50% 1/16W
R24	1-218-728-11	s	METAL 33K 0.50% 1/16W
R25	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R26	1-218-728-11	s	METAL 33K 0.50% 1/16W
R27	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R28	1-218-728-11	s	METAL 33K 0.50% 1/16W
R29	1-218-728-11	s	METAL 33K 0.50% 1/16W
R30	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R31	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R32	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R33	1-218-716-11	s	METAL 10K 0.50% 1/16W
R34	1-218-728-11	s	METAL 33K 0.50% 1/16W
R35	1-218-728-11	s	METAL 33K 0.50% 1/16W
R36	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R41	1-218-700-11	s	METAL 2.2K 0.50% 1/16W

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R38	1-218-728-11	s	METAL 33K 0.50% 1/16W
R39	1-218-711-11	s	METAL 6.2K 0.50% 1/16W
R40	1-218-716-11	s	METAL 10K 0.50% 1/16W
R42	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R101	1-218-666-11	s	METAL 82 0.50% 1/16W
R102	1-216-791-11	s	METAL, CHIP 3.3 5% 1/16W
R103	1-218-685-11	s	METAL 510 0.50% 1/16W
R104	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R105	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R106	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R107	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R111	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R112	1-218-697-11	s	METAL 1.6K 0.50% 1/16W
R113	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R114	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R115	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R116	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R117	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R118	1-218-676-11	s	METAL 220 0.50% 1/16W
R119	1-218-738-11	s	CHIP, METAL 82K 0.50% 1/16W
R120	1-218-665-11	s	CHIP, METAL 75 0.50% 1/16W
R121	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R122	1-218-701-11	s	METAL 2.4K 0.50% 1/16W
R123	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R124	1-218-740-11	s	METAL 100K 0.50% 1/16W
R126	1-218-716-11	s	METAL 10K 0.50% 1/16W
R128	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R129	1-218-716-11	s	METAL 10K 0.50% 1/16W
R130	1-218-678-11	s	CHIP, METAL 270 0.50% 1/16W
R131	1-218-651-11	s	METAL 20 0.50% 1/16W
R132	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R133	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R135	1-218-688-11	s	METAL 680 0.50% 1/16W
R136	1-218-716-11	s	METAL 10K 0.50% 1/16W
R137	1-218-700-11	s	METAL 2.2K 0.50% 1/16W
R138	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R139	1-218-714-11	s	METAL 8.2K 0.50% 1/16W
R150	1-218-644-11	s	METAL 10 0.50% 1/16W
R151	1-218-716-11	s	METAL 10K 0.50% 1/16W
R152	1-218-824-11	s	CHIP, METAL 110 0.50% 1/16W
R153	1-218-690-11	s	CHIP, METAL 820 0.50% 1/16W
R201	1-218-666-11	s	METAL 82 0.50% 1/16W
R202	1-216-791-11	s	METAL, CHIP 3.3 5% 1/16W
R203	1-218-685-11	s	METAL 510 0.50% 1/16W
R204	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R205	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R206	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R207	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R208	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R209	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R210	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R211	1-218-707-11	s	CHIP, METAL 4.3K 0.50% 1/16W
R212	1-218-694-11	s	CHIP, METAL 1.2K 0.50% 1/16W
R213	1-218-717-11	s	CHIP, METAL 11K 0.50% 1/16W
R214	1-218-682-11	s	METAL 390 0.50% 1/16W
R215	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R216	1-218-684-11	s	CHIP, METAL 470 0.50% 1/16W
R217	1-218-653-11	s	METAL 24 0.50% 1/16W
R218	1-218-654-11	s	CHIP, METAL 27 0.50% 1/16W
R219	1-218-654-11	s	CHIP, METAL 27 0.50% 1/16W

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R220	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R221	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R222	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R223	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R224	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R225	1-218-676-11	s	METAL 220 0.50% 1/16W
R226	1-218-738-11	s	CHIP, METAL 82K 0.50% 1/16W
R227	1-218-665-11	s	CHIP, METAL 75 0.50% 1/16W
R228	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R229	1-218-701-11	s	METAL 2.4K 0.50% 1/16W
R230	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R231	1-218-740-11	s	METAL 100K 0.50% 1/16W
R233	1-218-716-11	s	METAL 10K 0.50% 1/16W
R234	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R236	1-218-716-11	s	METAL 10K 0.50% 1/16W
R240	1-218-678-11	s	CHIP, METAL 270 0.50% 1/16W
R241	1-218-651-11	s	METAL 20 0.50% 1/16W
R242	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R243	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R244	1-218-688-11	s	METAL 680 0.50% 1/16W
R245	1-218-716-11	s	METAL 10K 0.50% 1/16W
R246	1-218-700-11	s	METAL 2.2K 0.50% 1/16W
R247	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R248	1-218-714-11	s	METAL 8.2K 0.50% 1/16W
R250	1-218-644-11	s	METAL 10 0.50% 1/16W
R251	1-218-716-11	s	METAL 10K 0.50% 1/16W
R301	1-218-666-11	s	METAL 82 0.50% 1/16W
R302	1-216-791-11	s	METAL, CHIP 3.3 5% 1/16W
R303	1-218-685-11	s	METAL 510 0.50% 1/16W
R304	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R305	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R306	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R307	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R311	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R312	1-218-697-11	s	METAL 1.6K 0.50% 1/16W
R313	1-218-689-11	s	CHIP, METAL 750 0.50% 1/16W
R314	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R315	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R316	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R317	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R318	1-218-676-11	s	METAL 220 0.50% 1/16W
R319	1-218-738-11	s	CHIP, METAL 82K 0.50% 1/16W
R320	1-218-665-11	s	CHIP, METAL 75 0.50% 1/16W
R321	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R322	1-218-701-11	s	METAL 2.4K 0.50% 1/16W
R323	1-218-748-11	s	CHIP, METAL 220K 0.50% 1/16W
R324	1-218-740-11	s	METAL 100K 0.50% 1/16W
R326	1-218-716-11	s	METAL 10K 0.50% 1/16W
R328	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R329	1-218-716-11	s	METAL 10K 0.50% 1/16W
R330	1-218-678-11	s	CHIP, METAL 270 0.50% 1/16W
R331	1-218-651-11	s	METAL 20 0.50% 1/16W
R332	1-218-691-11	s	CHIP, METAL 910 0.50% 1/16W
R333	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
R335	1-218-688-11	s	METAL 680 0.50% 1/16W
R336	1-218-716-11	s	METAL 10K 0.50% 1/16W
R337	1-218-700-11	s	METAL 2.2K 0.50% 1/16W
R338	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R339	1-218-714-11	s	METAL 8.2K 0.50% 1/16W

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R350	1-218-644-11	s	METAL 10 0.50% 1/16W
R351	1-218-716-11	s	METAL 10K 0.50% 1/16W
R352	1-218-824-11	s	CHIP, METAL 110 0.50% 1/16W
R353	1-218-690-11	s	CHIP, METAL 820 0.50% 1/16W
R401	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R402	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R403	1-218-716-11	s	METAL 10K 0.50% 1/16W
R404	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R405	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R406	1-218-716-11	s	METAL 10K 0.50% 1/16W
R407	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R408	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R409	1-218-716-11	s	METAL 10K 0.50% 1/16W
R410	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R411	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R412	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R413	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R414	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R415	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R416	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R417	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R418	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R419	1-218-680-11	s	METAL 330 0.50% 1/16W
R420	1-218-680-11	s	METAL 330 0.50% 1/16W
R421	1-218-680-11	s	METAL 330 0.50% 1/16W
R422	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R423	1-218-680-11	s	METAL 330 0.50% 1/16W
R424	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R425	1-218-658-11	s	METAL 39 0.50% 1/16W
R426	1-218-680-11	s	METAL 330 0.50% 1/16W
R427	1-218-658-11	s	METAL 39 0.50% 1/16W
R428	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R429	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R430	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R431	1-218-680-11	s	METAL 330 0.50% 1/16W
R432	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R433	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R434	1-218-658-11	s	METAL 39 0.50% 1/16W
R435	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R436	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R501	1-218-698-11	s	METAL 1.8K 0.50% 1/16W
R502	1-218-698-11	s	METAL 1.8K 0.50% 1/16W
R503	1-218-698-11	s	METAL 1.8K 0.50% 1/16W
R504	1-218-698-11	s	METAL 1.8K 0.50% 1/16W
R505	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R506	1-218-750-11	s	METAL 270K 0.50% 1/16W
R507	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R508	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R509	1-218-693-11	s	CHIP, METAL 1.1K 0.50% 1/16W
R510	1-218-851-11	s	CHIP, METAL 1.5K 0.50% 1/16W
R511	1-218-665-11	s	CHIP, METAL 75 0.50% 1/16W
R512	1-218-665-11	s	CHIP, METAL 75 0.50% 1/16W
R513	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R514	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R515	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R516	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R517	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R518	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R519	1-218-651-11	s	METAL 20 0.50% 1/16W

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R520	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R521	1-218-651-11	s	METAL 20 0.50% 1/16W
R522	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R523	1-218-672-11	s	METAL 150 0.50% 1/16W
R524	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R525	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R526	1-218-716-11	s	METAL 10K 0.50% 1/16W
R527	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R528	1-218-716-11	s	METAL 10K 0.50% 1/16W
R529	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R530	1-218-716-11	s	METAL 10K 0.50% 1/16W
R531	1-218-716-11	s	METAL 10K 0.50% 1/16W
R532	1-218-851-11	s	CHIP, METAL 1.5K 0.50% 1/16W
R533	1-218-851-11	s	CHIP, METAL 1.5K 0.50% 1/16W
R534	1-218-716-11	s	METAL 10K 0.50% 1/16W
R535	1-218-851-11	s	CHIP, METAL 1.5K 0.50% 1/16W
R536	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R537	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R538	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R539	1-218-675-11	s	CHIP, METAL 200 0.50% 1/16W
R540	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R541	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R542	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R543	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R544	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R545	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R546	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R547	1-218-665-11	s	CHIP, METAL 75 0.50% 1/16W
R548	1-218-716-11	s	METAL 10K 0.50% 1/16W
R549	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R550	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R551	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R552	1-218-665-11	s	CHIP, METAL 75 0.50% 1/16W
R553	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R554	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R555	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R556	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R557	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R558	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R559	1-218-665-11	s	CHIP, METAL 75 0.50% 1/16W
R560	1-218-700-11	s	METAL 2.2K 0.50% 1/16W
R561	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R562	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R563	1-218-724-11	s	CHIP, METAL 22K 5% 1/16W
R564	1-218-666-11	s	METAL 82 0.50% 1/16W
R565	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R566	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R568	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R569	1-218-685-11	s	METAL 510 0.50% 1/16W
R570	1-218-695-11	s	METAL 1.3K 0.50% 1/16W
R571	1-218-728-11	s	METAL 33K 0.50% 1/16W
R572	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R573	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R574	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R575	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R576	1-218-651-11	s	METAL 20 0.50% 1/16W
R577	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R578	1-218-680-11	s	METAL 330 0.50% 1/16W
R579	1-218-704-11	s	METAL 3.3K 0.50% 1/16W

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R580	1-218-716-11	s	METAL 10K 0.50% 1/16W
R581	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R582	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R583	1-218-651-11	s	METAL 20 0.50% 1/16W
R584	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R585	1-218-700-11	s	METAL 2.2K 0.50% 1/16W
R586	1-218-728-11	s	METAL 33K 0.50% 1/16W
R587	1-216-789-11	s	METAL, CHIP 2.2 5% 1/16W
R588	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R589	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R590	1-218-716-11	s	METAL 10K 0.50% 1/16W
R591	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R592	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R593	1-218-728-11	s	METAL 33K 0.50% 1/16W
R595	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R596	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R597	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R598	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R599	1-218-652-11	s	CHIP, METAL 22 0.50% 1/16W
R600	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R601	1-218-698-11	s	METAL 1.8K 0.50% 1/16W
R602	1-218-719-11	s	METAL 13K 0.50% 1/16W
R603	1-218-716-11	s	METAL 10K 0.50% 1/16W
R604	1-218-730-11	s	CHIP, METAL 39K 0.50% 1/16W
R605	1-218-688-11	s	METAL 680 0.50% 1/16W
R606	1-218-720-11	s	METAL 15K 0.50% 1/16W
R607	1-218-716-11	s	METAL 10K 0.50% 1/16W
R608	1-218-683-11	s	CHIP, METAL 430 0.50% 1/16W
R609	1-218-713-11	s	CHIP, METAL 7.5K 0.50% 1/16W
R610	1-218-730-11	s	CHIP, METAL 39K 0.50% 1/16W
R611	1-218-716-11	s	METAL 10K 0.50% 1/16W
R612	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R614	1-218-719-11	s	METAL 13K 0.50% 1/16W
R615	1-218-686-11	s	METAL 560 0.50% 1/16W
R616	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R617	1-218-720-11	s	METAL 15K 0.50% 1/16W
R618	1-218-686-11	s	METAL 560 0.50% 1/16W
R620	1-218-644-11	s	METAL 10 0.50% 1/16W
R621	1-218-660-91	s	CHIP, METAL 47 0.50% 1/16W
R701	1-218-676-11	s	METAL 220 0.50% 1/16W
R702	1-218-671-11	s	CHIP, METAL 130 0.50% 1/16W
R703	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R704	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R705	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R706	1-218-676-11	s	METAL 220 0.50% 1/16W
R707	1-218-671-11	s	CHIP, METAL 130 0.50% 1/16W
R708	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R709	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R710	1-218-745-11	s	CHIP, METAL 160K 0.50% 1/16W
R801	1-218-740-11	s	METAL 100K 0.50% 1/16W
R802	1-218-740-11	s	METAL 100K 0.50% 1/16W
R803	1-218-740-11	s	METAL 100K 0.50% 1/16W
R804	1-218-679-91	s	CHIP, METAL 300 0.50% 1/16W
R805	1-218-716-11	s	METAL 10K 0.50% 1/16W
R806	1-218-716-11	s	METAL 10K 0.50% 1/16W
R807	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R808	1-218-709-11	s	METAL 5.1K 0.50% 1/16W
R809	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W

(VDA-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R810	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R811	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R812	1-218-740-11	s	METAL 100K 0.50% 1/16W
R813	1-218-740-11	s	METAL 100K 0.50% 1/16W
R814	1-218-740-11	s	METAL 100K 0.50% 1/16W
R815	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R816	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R817	1-218-740-11	s	METAL 100K 0.50% 1/16W
R818	1-218-740-11	s	METAL 100K 0.50% 1/16W
R819	1-218-716-11	s	METAL 10K 0.50% 1/16W
RV1	1-241-825-11	s	RES, ADJ, METAL 50
RV102	1-241-827-11	s	RES, ADJ, METAL 200
RV103	1-241-827-11	s	RES, ADJ, METAL 200
RV201	1-241-827-11	s	RES, ADJ, METAL 200
RV202	1-241-827-11	s	RES, ADJ, METAL 200
RV302	1-241-827-11	s	RES, ADJ, METAL 200
RV303	1-241-827-11	s	RES, ADJ, METAL 200
RV501	1-241-827-11	s	RES, ADJ, METAL 200
RV502	1-241-828-21	s	RES, ADJ, METAL 500
RV504	1-241-828-21	s	RES, ADJ, METAL 500
RV701	1-241-827-11	s	RES, ADJ, METAL 200
RV702	1-241-827-11	s	RES, ADJ, METAL 200

1-4. HDC-700 Frame

Ref. No. or Q'ty	Part No.	SP	Description
	⚠ 1-466-411-21	s	CONVERTER UNIT, DC-DC
CB101	⚠ 1-533-514-31	s	BREAKER, CIRCUIT 1.25A 250V
CB102	⚠ 1-533-515-31	s	BREAKER, CIRCUIT 2.5A 250V
CN1	1-565-443-11	o	CONNECTOR, 10P, FEMALE "TRACKER"
CN2	1-562-222-21	s	CONNECTOR 6P FEMALE "RET CONTROL"
CN3	1-766-696-11	o	CONNECTOR, 8P FEMALE "REMOTE"
CN4	1-563-929-11	s	CONNECTOR, 4P, FEMALE "SCRIPT"
CN11	1-569-253-21	s	CONNECTOR, BNC, FEMALE "MONITOR"
CN12	1-569-253-21	s	CONNECTOR, BNC, FEMALE "PROMPTER"
CN101	1-777-205-21	s	CABLE ASSEMBLY, ENCAPSULATD
CN102	1-509-892-31	o	CONNECTOR 36P, MALE "LENS"
CN103	1-562-989-11	s	CONNECTOR, MULTI 25P, FEMALE "VF"
	1-562-580-21	o	CONTACT, FEMALE AWG24-28
CN104	1-563-159-11	s	CONNECTOR, 5P, FEMALE "INCOM/PGM1"
CN105	1-563-159-11	s	CONNECTOR, 5P, FEMALE "INCOM/PGM2"
CN106	⚠ 1-251-220-11	s	OUTLET, AC 3P, FEMALE
CN107	1-573-593-11	s	CONNECTOR, XLR 3P, MALE "MIC1 IN"
CN108	1-573-593-11	s	CONNECTOR, XLR 3P, MALE "MIC2 IN"
CN109	1-562-244-00	o	CONNECTOR, 26P, MALE "VTR"
CN110	1-568-181-11	s	CONNECTOR, 9P FEMALE "TRUNK LINE"
CN111	1-509-177-31	s	CONNECTOR, 4P FEMALE "DC IN"
CN112	1-777-059-11	o	CABLE ASSEMBLY,COAXIAL (SDI-A) "SERIAL OUT"
FAN1	1-698-977-11	s	MOTOR, DC BLUSHLESS FAN
FAN2	1-698-775-21	s	FAN, DC
FB101	1-543-824-11	s	CORE, TROIDAL
S101	⚠ 1-570-173-11	s	SELECTOR, POWER VOLTAGE
S103	⚠ 1-762-116-11	s	SWITCH, AC POWER "CAMERA POWER"
T100	⚠ 1-426-993-13	s	TRANSFORMER, POWER
COAXIAL CABLE (SDI-10 TO RX-28)			
	1-777-058-11	o	CABLE ASSEMBLY,COAXIAL
FLEXIBLE CARD WIRE (OHB TO CN13/MB-666)			
	1-777-661-11	s	WIRE, FLEXIBLE CARD (28 CORE)
FLEXIBLE CARD WIRE (CN1/AT-104 TO CN11/CN-1270)			
	1-777-662-11	s	WIRE, FLEXIBLE CARD (24 CORE)
HARNESS (AC)			
CN8F(TO CN-1270 BOARD)			
	⚠ 1-562-352-11	o	HOUSING, 2P
	⚠ 1-562-210-11	o	CONTACT, FEMALE AWG18-22
CN54F(TO CN-986 BOARD)			
	⚠ 1-562-211-11	o	HOUSING, 3P
	⚠ 1-562-210-11	o	CONTACT, FEMALE AWG18-22
HARNESS (BREAKER)			
CB101	⚠ 1-533-514-31	s	BREAKER, CIRCUIT 1.25A 250V
CB102	⚠ 1-533-515-31	s	BREAKER, CIRCUIT 2.5A 250V
CN51F(TO CN-986 BOARD)			
	⚠ 1-562-285-11	s	HOUSING, 4P
	⚠ 1-562-210-11	o	CONTACT, FEMALE AWG18-22
S101	⚠ 1-570-173-11	s	SELECTOR, POWER VOLTAGE

1-7. Supplied Accessories

Ref. No. or Q'ty	Part No.	SP	Description
(HDC-700)			
2pcs	2-280-511-01	o	BRACKET, ADJUSTMENT, ANGLE
1pcs	3-167-517-01	s	PLATE, NUMBER (BACK TALLY)
1pcs	3-185-945-01	s	PLATE, NUMBER (SIDE PANEL)
2pcs	3-186-502-01	s	BAND, CLAMP
1pcs	4-027-937-01	s	PLATE, NUMBER (UP TALLY)
(HDC-750)			
1pc	A-6772-374-A	s	BELT ASSY, SHOULDER
1pc	A-8273-247-A	o	MOUNTED CIRCUIT BOARD, EX-512
(HDCA-750)			
1pc	A-7612-224-A	o	TABLE ASSY, BATTERY
1pc	A-8273-166-A	o	MOUNTED CIRCUIT BOARD, CN-1292
1pc	3-694-183-01	s	SPACER, BATTERY
1pc	7-621-775-20	s	SCREW +B 2.6X5
3pcs	7-627-556-58	s	SCREW +P 2.6X5
3pcs	7-683-418-04	s	BOLT,HEXAGON SOCKET 4X6
2pcs	7-683-423-04	s	BOLT,HEXAGON SOCKET 4X16

1-8. Optional Fixtures

Part No.	SP	Description
A-8273-247-A	o	EXTENSION BOARD, EX-512
J-6029-140-B	o	PATTERN BOX
J-6394-080-A	o	GRAYSCALE CHART (16:9)
J-6480-010-A	o	ALIGNMENT SLEEVE REMOVER

1-9. Changed Parts

NOTE: The numbers identified by marking with) are
matching with each serial numbers.
See the table matched with each serial numbers.

605) Serial No. 10043- (HDC-700), 10086- (HDC-750), 10086- (HDCA-750)
607) Serial No. 10043- (HDC-700), 10096- (HDC-750), 10086- (HDCA-750)
611) Serial No. 10053- (HDC-700), 10096- (HDC-750), 10096- (HDCA-750)
701) Serial No. 10078- (HDC-700), 10086- (HDC-750), 10086- (HDCA-750)

AU-203 BOARD
---

701) S1	1-762-118-21 s SWITCH, TOGGLE	--->	DELETED.

DAD-19 BOARD
---

611) R1	1-218-866-11 s CHIP, METAL 6.2K 0.50% 1/16W	--->	1-218-703-11 s CHIP, METAL 3K 0.50% 1/16W
607) R147	1-218-723-11 s METAL 20K 0.50% 1/16W	--->	1-218-725-11 s METAL 24K 0.50% 1/16W
607) R149	1-218-727-11 s METAL 30K 0.50% 1/16W	--->	1-218-881-11 s CHIP, METAL 27K 0.50% 1/16W
607) R151	1-218-692-11 s CHIP, METAL 1K 0.50% 1/16W	--->	1-218-694-11 s CHIP, METAL 1.2K 0.50% 1/16W
607) R172	1-218-858-11 s CHIP, METAL 3K 0.50% 1/16W	--->	DELETED.
611) R2	1-218-692-11 s CHIP, METAL 1K 0.50% 1/16W	--->	1-218-695-11 s METAL 1.3K 0.50% 1/16W
607) R217	1-218-716-11 s METAL 10K 0.50% 1/16W	--->	1-218-717-11 s CHIP, METAL 11K 0.50% 1/16W
611) R230	NOT IN USE.	--->	1-218-716-11 s METAL 10K 0.50% 1/16W
611) R231	NOT IN USE.	--->	1-216-864-11 s METAL, CHIP 0 5% 1/16W
611) R255	NOT IN USE.	--->	1-216-864-11 s METAL, CHIP 0 5% 1/16W
611) R256	NOT IN USE.	--->	1-218-716-11 s METAL 10K 0.50% 1/16W

DAP-5 BOARD
---

611) R117	1-218-708-11 s METAL 4.7K 0.50% 1/16W	--->	1-218-710-11 s CHIP, METAL 5.6K 0.50% 1/16W
611) R120	1-218-708-11 s METAL 4.7K 0.50% 1/16W	--->	1-218-710-11 s CHIP, METAL 5.6K 0.50% 1/16W

DL-65 BOARD
---

605) IC800	NOT IN USE.	--->	8-759-234-20 s IC TC7S08F
605) R164	1-218-883-11 s METAL 33K 0.50% 1/16W	--->	1-218-734-11 s CHIP, METAL 56K 5% 1/16W
611) R165	1-218-712-11 s CHIP, METAL 6.8K 0.50% 1/16W	--->	1-218-711-11 s CHIP, METAL 6.2K 0.50% 1/16W
605) R364	1-218-883-11 s METAL 33K 0.50% 1/16W	--->	1-218-734-11 s CHIP, METAL 56K 5% 1/16W
611) R365	1-218-712-11 s CHIP, METAL 6.8K 0.50% 1/16W	--->	1-218-711-11 s CHIP, METAL 6.2K 0.50% 1/16W
605) R396	1-218-883-11 s METAL 33K 0.50% 1/16W	--->	1-218-734-11 s CHIP, METAL 56K 5% 1/16W
605) R397	1-218-704-11 s METAL 3.3K 0.50% 1/16W	--->	1-218-712-11 s CHIP, METAL 6.8K 0.50% 1/16W
611) R397	1-218-712-11 s CHIP, METAL 6.8K 0.50% 1/16W	--->	1-218-711-11 s CHIP, METAL 6.2K 0.50% 1/16W
605) R564	1-218-883-11 s METAL 33K 0.50% 1/16W	--->	1-218-734-11 s CHIP, METAL 56K 5% 1/16W
611) R565	1-218-712-11 s CHIP, METAL 6.8K 0.50% 1/16W	--->	1-218-711-11 s CHIP, METAL 6.2K 0.50% 1/16W
605) R792	1-211-977-11 s CHIP, METAL 22 0.50% 1/16W	--->	DELETED.

PS-400 BOARD
---

611) C1	NOT IN USE.	--->	1-164-004-11 s CERAMIC, CHIP 0.1uF 10% 25V
611) C3	NOT IN USE.	--->	1-107-689-21 s TANTAL 1uF 20% 35V
607) CB1	1-533-641-11 s BREAKER, CIRCUIT	--->	1-533-520-21 s BREAKER, CIRCUIT 6A 250V
607) FB6	NOT IN USE.	--->	1-543-528-11 s BEAD, AMORPHOUS
607) L14	1-414-700-11 s INDUCTOR 47uH	--->	DELETED.
611) R46	1-216-685-11 s METAL, CHIP 27K 0.5% 1/10W	--->	1-216-677-11 s METAL, CHIP 12K 0.5% 1/10W

PS-401 BOARD
---

701) CP2	8-719-053-15 s PHOTO COUPLER PS2701-1-E3-L	--->	8-749-010-64 s PHOTO COUPLER TLP123F2

SG-226 BOARD
---

611) R404	NOT IN USE.	--->	1-216-864-11 s METAL, CHIP 0 5% 1/16W

VA-158 BOARD
---

605) C302	1-162-908-11 s CERAMIC 3PF 0.25PF 50V	--->	1-162-905-11 s CERAMIC 1PF 0.25PF 50V
605) C502	1-162-908-11 s CERAMIC 3PF 0.25PF 50V	--->	1-162-905-11 s CERAMIC 1PF 0.25PF 50V
605) C702	1-162-908-11 s CERAMIC 3PF 0.25PF 50V	--->	1-162-905-11 s CERAMIC 1PF 0.25PF 50V
607) R108	1-218-733-11 s CHIP, METAL 51K 0.50% 1/16W	--->	1-218-740-11 s CHIP, METAL 100K 0.50% 1/16W
607) R109	1-218-733-11 s CHIP, METAL 51K 0.50% 1/16W	--->	1-218-740-11 s CHIP, METAL 100K 0.50% 1/16W
607) R110	1-218-733-11 s CHIP, METAL 51K 0.50% 1/16W	--->	1-218-740-11 s CHIP, METAL 100K 0.50% 1/16W
607) R300	1-218-729-11 s CHIP, METAL 36K 0.50% 1/16W	--->	1-218-744-11 s CHIP, METAL 150K 0.50% 1/16W
607) R500	1-218-729-11 s CHIP, METAL 36K 0.50% 1/16W	--->	1-218-744-11 s CHIP, METAL 150K 0.50% 1/16W
607) R700	1-218-729-11 s CHIP, METAL 36K 0.50% 1/16W	--->	1-218-744-11 s CHIP, METAL 150K 0.50% 1/16W

VDA-31 BOARD
---

701) C16	1-162-915-11 s CERAMIC, CHIP 10PF 5PF 50V	--->	1-162-957-11 s CERAMIC, CHIP 220PF 5PF 50V
611) C541	NOT IN USE.	--->	1-162-905-11 s CERAMIC 1PF 0.25PF 50V
611) C603	NOT IN USE.	--->	1-162-909-11 s CERAMIC 4PF 0.25PF 50V
701) D1	NOT IN USE.	--->	8-719-059-52 s DIODE MA3J14300LSO
607) R122	1-218-668-11 s CHIP, METAL 100 0.50% 1/16W	--->	1-218-701-11 s METAL 2.4K 0.50% 1/16W
607) R229	1-218-668-11 s CHIP, METAL 100 0.50% 1/16W	--->	1-218-701-11 s METAL 2.4K 0.50% 1/16W
607) R322	1-218-668-11 s CHIP, METAL 100 0.50% 1/16W	--->	1-218-701-11 s METAL 2.4K 0.50% 1/16W
701) R41	NOT IN USE.	--->	1-218-700-11 s METAL 2.2K 0.50% 1/16W
701) R42	NOT IN USE.	--->	1-218-692-11 s CHIP, METAL 1K 0.50% 1/16W
607) R509	1-218-694-11 s CHIP, METAL 1.2K 0.50% 1/16W	--->	1-218-693-11 s CHIP, METAL 1.1K 0.50% 1/16W
611) R566	NOT IN USE.	--->	1-218-704-11 s METAL 3.3K 0.50% 1/16W
701) R594	1-218-724-11 s CHIP, METAL 22K 5% 1/16W	--->	DELETED.

VDA-31 (1-660-243-14)

CN1	D5	C402	D1	C704	*F1	L401	F1
CN101	F1	C403	*E1	C705	F1	L402	*D1
CN102	F1	C404	*E1	C706	*F1	L501	D1
CN301	H1	C405	*E1	C707	*D1	L502	D1
CN302	G1	C406	*E1	C708	*D1	L701	*E1
		C407	*E1	C709	*D1	L702	*E1
C1	*A1	C408	*E1	C710	*D1		
C3	*B5	C409	*E1	C801	*B1	Q1	*G5
C4	*B5	C410	*E1	C802	B1	Q2	*H5
C5	*G1	C411	*E1	C803	*B1	Q3	*G1
C6	*H1	C412	E1	C804	*B1	Q4	*G1
C7	G1	C413	E1	C805	*B1	Q101	F1
C8	H1	C414	E1			Q102	F1
C9	G5	C415	E1	DL101	F1	Q201	G1
C10	H5	C416	E1	DL301	H1	Q202	G1
C11	*B5	C417	E1			Q301	H1
C12	H5	C418	E1	D1	A1	Q302	H1
C13	G5	C419	E1	D501	*B1	Q501	*C1
C14	*G5	C420	*F1	D502	*B1	Q502	*C1
C15	*B5	C421	E1	D503	*A1	Q503	*C1
C16	B1	C422	*F1	D504	C1	Q504	B1
C17	B1	C423	*E1	D505	*C1	Q505	C1
C18	*C5	C424	E1	D601	*D1	Q506	C1
C101	F1	C425	*E1			Q507	C1
C102	F1	C426	E1	E1	H1	Q508	B1
C103	*F1	C427	*E1			Q509	B1
C104	F1	C428	E1	FL101	F1	Q510	B1
C105	F1	C429	E1	FL201	G1	Q511	D1
C106	*F1	C430	*E1	FL301	G1	Q512	B1
C111	*F1	C431	E1	FL401	E1	Q513	B1
C112	F1	C501	B1	FL402	E1	Q514	B1
C113	*F1	C502	A1	FL403	E1	Q515	A1
C114	*F1	C503	*A1	FL701	E1	Q516	A1
C115	F1	C504	*A1	FL702	C1	Q517	A1
C116	F1	C505	*A1			Q518	A1
C117	F1	C506	*A1	IC1	*B5	Q519	A1
C118	F1	C507	*A1	IC2	*B5	Q520	A1
C119	F1	C508	*A1	IC3	G5	Q521	A1
C120	*F1	C509	*B1	IC4	*B5	Q801	B1
C121	F1	C510	*A1	IC5	*G1	Q802	B1
C122	F1	C511	*A1	IC6	*C5	Q803	B1
C123	*F1	C512	*B1	IC7	*A1	Q804	B1
C124	*F1	C513	*B1	IC101	*F1	Q805	B1
C126	*F1	C514	*A1	IC103	*F1		
C127	*F1	C515	*B1	IC104	*F1	R1	*B5
C128	F1	C516	B1	IC105	F1	R2	*B5
C201	G1	C517	*A1	IC106	*F1	R3	*B5
C202	G1	C518	A1	IC201	*G1	R4	*B5
C203	*G1	C519	B1	IC202	*G1	R5	*B5
C204	F1	C520	C1	IC203	*G1	R6	*B5
C205	G1	C521	*C1	IC204	*G1	R7	*G1
C206	F1	C522	*D1	IC205	G1	R8	*G1
C207	F1	C523	*D1	IC206	*G1	R9	*G1
C208	G1	C524	D1	IC301	*H1	R10	*G1
C209	G1	C525	D1	IC303	*H1	R11	*H1
C210	F1	C526	D1	IC304	*G1	R12	*H1
C211	*G1	C527	D1	IC305	G1	R13	G5
C212	G1	C528	*B1	IC306	*H1	R14	*G5
C213	*G1	C529	D1	IC401	*E1	R15	*G5
C214	*G1	C530	*D1	IC402	*E1	R16	H5
C215	G1	C531	*D1	IC403	*E1	R17	*B5
C216	F1	C532	*C1	IC404	*E1	R18	*B5
C217	G1	C533	*C1	IC405	*E1	R19	G5
C218	G1	C534	*C1	IC406	*E1	R20	G5
C219	G1	C535	*D1	IC501	D1	R21	*G5
C220	*F1	C536	*C1	IC502	D1	R22	H5
C221	G1	C537	*B1	IC503	C1	R23	*G5
C222	G1	C538	*B1	IC504	D1	R24	*B5
C223	*G1	C539	C1	IC505	D1	R25	*G5
C224	*G1	C540	*D1	IC506	C1	R26	*B5
C226	*G1	C541	*D1	IC507	D1	R27	*B5
C227	*F1	C542	D1	IC508	*D1	R28	B1
C228	F1	C543	*B1	IC509	C1	R29	B1
C301	G1	C544	*C1	IC510	C1	R30	B1
C302	H1	C546	D1	IC511	*B1	R31	B1
C303	*G1	C547	*C1	IC512	B1	R32	B1
C304	G1	C548	*D1	IC513	A1	R33	*C5
C305	H1	C549	D1	IC514	B1	R34	*C5
C306	*H1	C550	*D1	IC515	A1	R35	*C5
C311	*G1	C551	*B1	IC516	C1	R36	*B1
C312	G1	C555	*C1	IC520	*B1	R37	*B1
C313	*H1	C556	*C1	IC521	C1	R38	*A1
C314	*H1	C557	*C1	IC522	C1	R39	*A1
C315	H1	C558	*C1	IC523	*B1	R40	*A1
C316	G1	C559	*D1	IC601	*A1	R41	A1
C317	H1	C560	*C1	IC602	*B1	R42	*B1
C318	H1	C561	*C1	IC701	*F1	R101	*F1
C319	G1	C562	*C1	IC702	*D1	R102	*F1
C320	*G1	C563	*C1	IC703	*C1	R103	*F1
C321	G1	C564	*C1	IC801	*B1	R104	F1
C322	H1	C600	*C1	IC802	A1	R105	F1
C323	*H1	C601	*D1	IC803	*B1	R106	F1
C324	*H1	C602	*C1	IC804	B1	R107	*F1
C326	G1	C701	*E1			R111	*F1
C327	*G1	C702	*E1	L101	*F1	R112	F1
C328	G1	C703	*F1	L102	*F1	R113	F1
C401	F1						

R114	*F1	R326	*H1	R545	*D1	R811	A1
R115	*F1	R328	*H1	R546	*C1	R812	B1
R116	F1	R329	G1	R547	C1	R813	A1
R117	*F1	R330	*G1	R548	*D1	R814	A1
R118	*F1	R331	*G1	R549	*D1	R815	*B1
R119	*F1	R332	*H1	R550	*C1	R816	*B1
R120	*F1	R333	H1	R551	*C1	R817	*A1
R121	*F1	R335	*G1	R552	*C1	R818	*A1
R122	*F1	R336	G1	R553	*D1	R819	B1
R123	*F1	R337	*G1	R554	*D1		
R124	*F1	R338	G1	R555	*D1	RV1	C1
R125	*F1	R339	*H1	R556	*D1	RV102	F1
R126	*F1	R350	G1	R557	*B1	RV103	F1
R128	*F1	R351	H1	R558	*D1	RV201	G1
R129	F1	R352	H1	R559	*C1	RV202	G1
R130	*F1	R353	H1	R560	B1	RV302	H1
R131	*F1	R401	*E1	R561	*D1	RV303	G1
R132	*F1	R402	*E1	R562	*C1	RV501	B1
R133	F1	R403	*E1	R563	C1	RV502	B1
R135	*F1	R404	*E1	R564	*D1	RV504	C1
R136	F1	R405	*E1	R565	*D1	RV701	F1
R137	*F1	R406	*E1	R566	*D1	RV702	D1
R138	F1	R407	*E1	R567	D1		
R139	*F1	R408	*E1	R568	*C1	TP1	F1
R150	*F1	R409	*E1	R569	*C1	TP2	F1
R151	F1	R410	*E1	R570	*C1		
R152	F1	R411	*E1	R571	*C1	*:B SIDE	
R153	F1	R412	*E1	R572	*D1		
R201	*G1	R413	*E1	R573	*D1		
R202	*G1	R414	E1	R574	*C1		
R203	G1	R415	*E1	R575	*C1		
R204	G1	R416	E1	R576	*B1		
R205	G1	R417	*E1	R577	*B1		
R206	G1	R418	E1	R578	*C1		
R207	F1	R419	*E1	R579	*D1		
R208	G1	R420	*E1	R580	*D1		
R209	G1	R421	*E1	R581	*C1		
R210	F1	R422	*E1	R582	*C1		
R211	G1	R423	*E1	R583	*C1		
R212	*G1	R424	*E1	R584	*C1		
R213	G1	R425	*E1	R585	B1		
R214	G1	R426	*E1	R586	*C1		
R215	*G1	R427	*E1	R587	D1		
R216	G1	R428	*E1	R588	*C1		
R217	G1	R429	*E1	R589	*C1		
R218	G1	R430	E1	R590	C1		
R219	*G1	R431	*E1	R591	*B1		
R220	G1	R432	*E1	R592	*A1		
R221	*G1	R433	E1	R593	*C1		
R222	*F1	R434	*E1	R594	*C1		
R223	G1	R435	*E1	R595	*D1		
R224	*G1	R436	E1	R596	*C1		
R225	*G1	R501	*A1	R597	*C1		
R226	*F1	R502	*B1	R598	D1		
R227	*F1	R503	*B1	R599	*C1		
R228	*G1	R504	*B1	R600	*D1		
R229	*G1	R505	*A1	R601	*D1		
R230	*G1	R506	*A1	R602	*D1		
R231	*G1	R507	*A1	R603	*D1		
R232	*G1	R508	*A1	R604	*D1		
R233	*G1	R509	*B1	R605	*C1		
R234	*G1	R510	*B1	R606	*C1		
R236	F1	R511	*B1	R607	*C1		
R240	*F1	R512	*A1	R608	C1		
R241	*F1	R513	*B1	R609	D1		
R242	*G1	R514	*B1	R610	C1		
R243	G1	R515	*A1	R611	C1		
R244	*G1	R516	*B1	R612	*C1		
R245	F1	R517	*A1	R614	*D1		
R246	*G1	R518	*A1	R615	*C1		
R247	G1	R519	*B1	R616	*D1		
R248	*G1	R520	*B1	R617	*D1		
R250	*G1	R521	*A1	R618	C1		
R251	G1	R522	*A1	R619	D1		
R301	*G1	R523	*B1	R620	*D1		
R302	*G1	R524	*B1	R621	*D1		
R303	*H1	R525	*B1	R701	E1		
R304	G1	R526	*B1	R702	F1		
R305	G1	R527	*A1	R703	*F1		
R306	H1	R528	*A1	R704	F1		
R307	*H1	R529	*A1	R705	*F1		
R311	*G1	R530	*A1	R706	C1		
R312	G1	R531	*B1	R707	D1		
R313	H1	R532	*B1	R708	*D1		
R314	*H1	R533	*A1	R709	*C1		
R315	*G1	R534	*A1	R710	*D1		
R316	H1	R535	*A1	R801	*B1		
R317	*H1	R536	*D1	R802	*B1		
R318	*H1	R537	*C1	R803	*B1		
R319	*G1	R538	*D1	R804	B1		
R320	*G1	R539	*B1	R805	B1		
R321	*G1	R540	*D1	R806	B1		
R322	*H1	R541	C1	R807	B1		
R323	*H1	R542	C1	R808	B1		
R324	*H1	R543	C1	R809	A1		
R325	*H1	R544	C1	R810	A1		

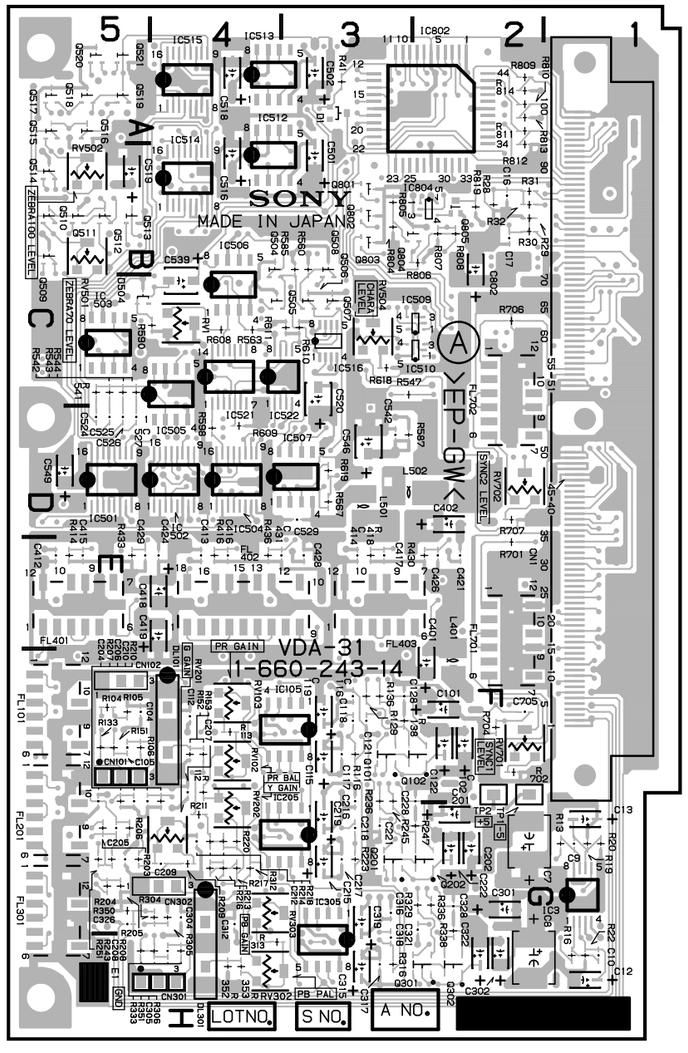

HDC-700 (SY) : S/N 10078 and Higher
HDCA-750 (SY) : S/N 10096 and Higher

VDA-31 -A SIDE-
1-660-243-14

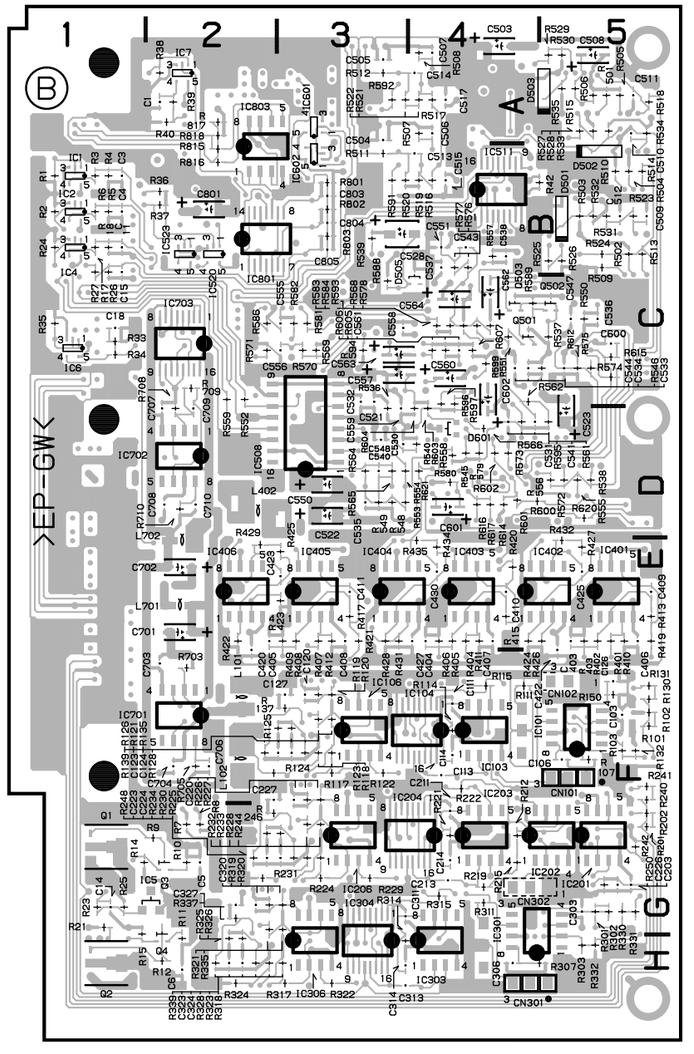

VDA-31 -B SIDE-
1-660-243-14

VDA-31 (1-660-243-13)

CN1	D1	C402	D2	C704	*F2	L402	*D2
CN101	F5	C403	*E5	C705	F2	L501	D3
CN102	F5	C404	*E4	C706	*F2	L502	D3
CN301	H4	C405	*E2	C707	*D2	L701	*E2
CN302	G4	C406	*E5	C708	*D2	L702	*E2
		C407	*E4	C709	*D2		
C1	*A2	C408	*E3	C710	*D2	Q1	*G1
C3	*B1	C409	*E5	C801	*B2	Q2	*H1
C4	*B1	C410	*E4	C802	B2	Q3	*G2
C5	*G2	C411	*E3	C803	*B3	Q4	*G2
C6	*H2	C412	E5	C804	*B3	Q101	F3
C7	G2	C413	E4	C805	*B3	Q102	F2
C8	H2	C414	E3			Q201	G3
C9	G1	C415	E5	DL101	F4	Q202	G2
C10	H1	C416	E4	DL301	H4	Q301	H2
C11	*B1	C417	E3			Q302	H2
C12	H1	C418	E4	D501	*B5	Q501	*C4
C13	G1	C419	E4	D502	*B5	Q502	*C5
C14	*G1	C420	*F2	D503	*A5	Q503	*C4
C15	*B1	C421	E2	D504	C5	Q504	B4
C16	B2	C422	*F5	D505	*C4	Q505	C4
C17	B2	C423	*E3	D601	*D4	Q506	C3
C18	*C1	C424	E4			Q507	C3
C101	F2	C425	*E5	E1	H5	Q508	B3
C102	F2	C426	E2			Q509	B5
C103	*F5	C427	*E4	FL101	F5	Q510	B5
C104	F5	C428	E3	FL201	G5	Q511	B5
C105	F5	C429	E5	FL301	G5	Q512	B5
C106	*F5	C430	*E4	FL401	E5	Q513	B5
C111	*F4	C431	E3	FL402	E4	Q514	B5
C112	F4	C501	B3	FL403	E3	Q515	A5
C113	*F4	C502	A3	FL701	E2	Q516	A5
C114	*F4	C503	*A4	FL702	C2	Q517	A5
C115	F3	C504	*A3			Q518	A5
C116	F3	C505	*A3	IC1	*B1	Q519	A5
C117	F3	C506	*A4	IC2	*B1	Q520	A5
C118	F3	C507	*A4	IC3	G1	Q521	A5
C119	F3	C508	*A5	IC4	*B1	Q801	B3
C120	*F3	C509	*B5	IC5	*G2	Q802	B3
C121	F3	C510	*A5	IC6	*C1	Q803	B3
C122	F2	C511	*A5	IC7	*A2	Q804	B2
C123	*F3	C512	*B5	IC101	*F5	Q805	B2
C124	*F3	C513	*B4	IC103	*F4		
C126	*F5	C514	*A4	IC104	*F4	R1	*B1
C127	*F3	C515	*B4	IC105	F3	R2	*B1
C128	F3	C516	B4	IC106	*F3	R3	*B1
C201	G2	C517	*A4	IC201	*G5	R4	*B1
C202	G2	C518	A4	IC202	*G4	R5	*B1
C203	*G5	C519	B5	IC203	*G4	R6	*B1
C204	F5	C520	C3	IC204	*G4	R7	*G2
C205	G5	C521	*C3	IC205	G3	R8	*G2
C206	F5	C522	*D3	IC206	*G3	R9	*G2
C207	F4	C523	*D5	IC301	*H5	R10	*G2
C208	G5	C524	D5	IC303	*H4	R11	*H2
C209	G4	C525	D5	IC304	*G3	R12	*H2
C210	F5	C526	D5	IC305	G3	R13	G1
C211	*G4	C527	D5	IC306	*H3	R14	*G1
C212	G4	C528	*B3	IC401	*E5	R15	*G1
C213	*G4	C529	D3	IC402	*E4	R16	H1
C214	*G4	C530	*D3	IC403	*E4	R17	*B1
C215	G3	C531	*D4	IC404	*E3	R18	*B1
C216	F3	C532	*C3	IC405	*E3	R19	G1
C217	G3	C533	*C5	IC406	*E2	R20	G1
C218	G3	C534	*C4	IC501	D5	R21	*G1
C219	G3	C535	*D3	IC502	D4	R22	H1
C220	*F3	C536	*C5	IC503	C5	R23	*G1
C221	G3	C537	*B4	IC504	D4	R24	*B1
C222	G2	C538	*B4	IC505	D4	R25	*G1
C223	*G2	C539	C4	IC506	C4	R26	*B1
C224	*G3	C540	*D3	IC507	D4	R27	*B1
C226	*G5	C541	*D4	IC508	*D3	R28	B2
C227	*F2	C542	D3	IC509	C2	R29	B2
C228	F2	C543	*B4	IC510	C2	R30	B2
C301	G2	C544	*C4	IC511	*B4	R31	B2
C302	H2	C546	D3	IC512	B4	R32	B2
C303	*G5	C547	*C5	IC513	A4	R33	*C1
C304	G4	C548	*D3	IC514	B4	R34	*C1
C305	H4	C549	D5	IC515	A4	R35	*C1
C306	*H4	C550	*D3	IC516	C3	R36	*B2
C311	*G3	C551	*B4	IC520	*B2	R37	*B2
C312	G4	C555	*C3	IC521	C4	R38	*A2
C313	*H3	C556	*C3	IC522	C4	R39	*A2
C314	*H3	C557	*C3	IC523	*B2	R40	*A2
C315	H3	C558	*C3	IC601	*A3	R101	*F5
C316	G3	C559	*D3	IC602	*B3	R102	*F5
C317	H3	C560	*C4	IC701	*F2	R103	*F5
C318	H3	C561	*C4	IC702	*D2	R104	F5
C319	G3	C562	*C4	IC703	*C2	R105	F5
C320	*G2	C563	*C3	IC801	*B2	R106	F5
C321	G2	C564	*C4	IC802	A2	R107	*F5
C322	H2	C600	*C5	IC803	*B2	R111	*F4
C323	*H2	C601	*D4	IC804	B2	R112	F4
C324	*H2	C602	*C4			R113	F4
C326	G5	C701	*E2	L101	*F2	R114	*F4
C327	*G2	C702	*E2	L102	*F2	R115	*F4
C328	G2	C703	*F2	L401	F2	R116	F3
C401	F2						

R117	*F3	R330	*G5	R548	*D3	R814	A2
R118	*F3	R331	*G5	R549	*D3	R815	*B2
R119	*F3	R332	*H5	R550	*C5	R816	*B2
R120	*F3	R333	H5	R551	*C4	R817	*A2
R121	*F3	R335	*G3	R552	*C2	R818	*A2
R122	*F3	R336	G2	R553	*D3	R819	B2
R123	*F3	R337	*G2	R554	*D3		
R124	*F2	R338	G2	R555	*D5	RV1	C4
R125	*F3	R339	*H2	R556	*D5	RV102	F4
R126	*F3	R350	G5	R557	*B4	RV103	F4
R128	*F3	R351	H4	R558	*D4	RV201	G4
R129	F3	R352	H4	R559	*C2	RV202	G4
R130	*F5	R353	H4	R560	B3	RV302	H4
R131	*F5	R401	*E5	R561	*D5	RV303	G4
R132	*F5	R402	*E5	R562	*C4	RV501	B5
R133	F5	R403	*E5	R563	C4	RV502	B5
R135	*F3	R404	*E4	R564	*D3	RV504	C3
R136	F3	R405	*E4	R565	*D3	RV701	F2
R137	*F3	R406	*E4	R566	*D4	RV702	D2
R138	F3	R407	*E3	R567	D3		
R139	*F2	R408	*E3	R568	*C4	TP1	F2
R150	*F5	R409	*E3	R569	*C3	TP2	F2
R151	F5	R410	*E5	R570	*C3		
R152	F4	R411	*E4	R571	*C2	*:B SIDE	
R153	F4	R412	*E3	R572	*D5		
R201	*G5	R413	*E5	R573	*D4		
R202	*G5	R414	E5	R574	*C5		
R203	G5	R415	*E4	R575	*C5		
R204	G5	R416	E4	R576	*B4		
R205	G5	R417	*E3	R577	*B4		
R206	G5	R418	E3	R578	*C4		
R207	F5	R419	*E5	R579	*D4		
R208	G5	R420	*E4	R580	*D4		
R209	G4	R421	*E3	R581	*C3		
R210	F4	R422	*E2	R582	*C3		
R211	G4	R423	*E3	R583	*C4		
R212	*G4	R424	*E4	R584	*C4		
R213	G4	R425	*E3	R585	B3		
R214	G4	R426	*E5	R586	*C2		
R215	*G4	R427	*E5	R587	D3		
R216	G4	R428	*E3	R588	*C3		
R217	G4	R429	*E2	R589	*C4		
R218	G4	R430	E2	R590	C4		
R219	*G4	R431	*E3	R591	*B3		
R220	G4	R432	*E5	R592	*A3		
R221	*G4	R433	E5	R593	*C4		
R222	*F4	R434	*E4	R594	*C3		
R223	G3	R435	*E4	R595	*D4		
R224	*G3	R436	E4	R596	*C4		
R225	*G3	R501	*A5	R597	*C4		
R226	*F3	R502	*B5	R598	D4		
R227	*F3	R503	*B5	R599	*C4		
R228	*G3	R504	*B5	R600	*D4		
R229	*G3	R505	*A5	R601	*D4		
R230	*G3	R506	*A5	R602	*D4		
R231	*G2	R507	*A4	R603	*D4		
R232	*G2	R508	*A4	R604	*D4		
R233	*G3	R509	*B5	R605	*C4		
R234	*G3	R510	*B5	R606	*C4		
R236	F3	R511	*B3	R607	*C4		
R240	*F5	R512	*A3	R608	C4		
R241	*F5	R513	*B5	R609	D4		
R242	*G5	R514	*B5	R610	C3		
R243	G5	R515	*A5	R611	C3		
R244	*G3	R516	*B4	R612	*C5		
R245	F3	R517	*A4	R614	*D4		
R246	*G2	R518	*A5	R615	*C5		
R247	G2	R519	*B4	R616	*D4		
R248	*G2	R520	*B3	R617	*D4		
R250	*G5	R521	*A4	R618	C3		
R251	G5	R522	*A3	R619	D3		
R301	*G5	R523	*B5	R620	*D5		
R302	*G5	R524	*B5	R621	*D4		
R303	*H5	R525	*B5	R701	E2		
R304	G4	R526	*B5	R702	F2		
R305	G4	R527	*A5	R703	*F2		
R306	H4	R528	*A5	R704	F2		
R307	*H5	R529	*A5	R705	*F2		
R311	*G4	R530	*A5	R706	C2		
R312	G4	R531	*B5	R707	D2		
R313	H4	R532	*B5	R708	*D2		
R314	*H3	R533	*A5	R709	*C2		
R315	*G4	R534	*A5	R710	*D2		
R316	H3	R535	*A5	R801	*B3		
R317	*H3	R536	*D3	R802	*B3		
R318	*H3	R537	*C5	R803	*B3		
R319	*G2	R538	*D5	R804	B3		
R320	*G3	R539	*B3	R805	B3		
R321	*G2	R540	*D4	R806	B2		
R322	*H3	R541	C5	R807	B2		
R323	*H2	R542	C5	R808	B2		
R324	*H2	R543	C5	R809	A2		
R325	*H2	R544	C5	R810	A2		
R326	*H2	R545	*D4	R811	A2		
R328	*H2	R546	*C5	R812	B2		
R329	G2	R547	C3	R813	A2		

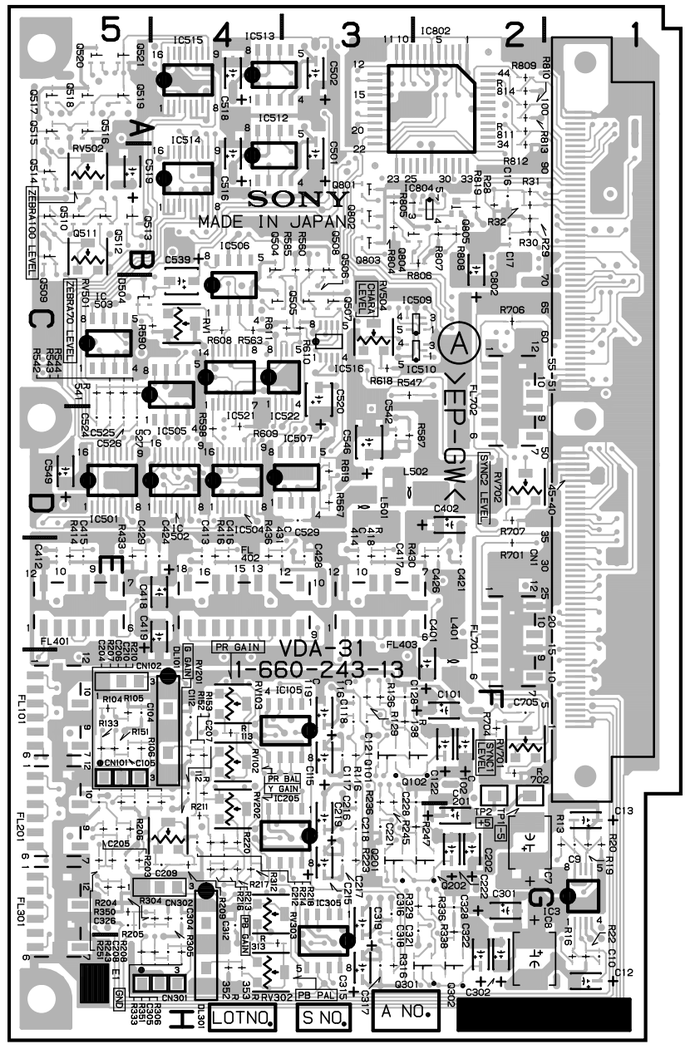

HDC-700 (SY) : S/N 10053 through 10077

VDA-31 -A SIDE-
1-660-243-13

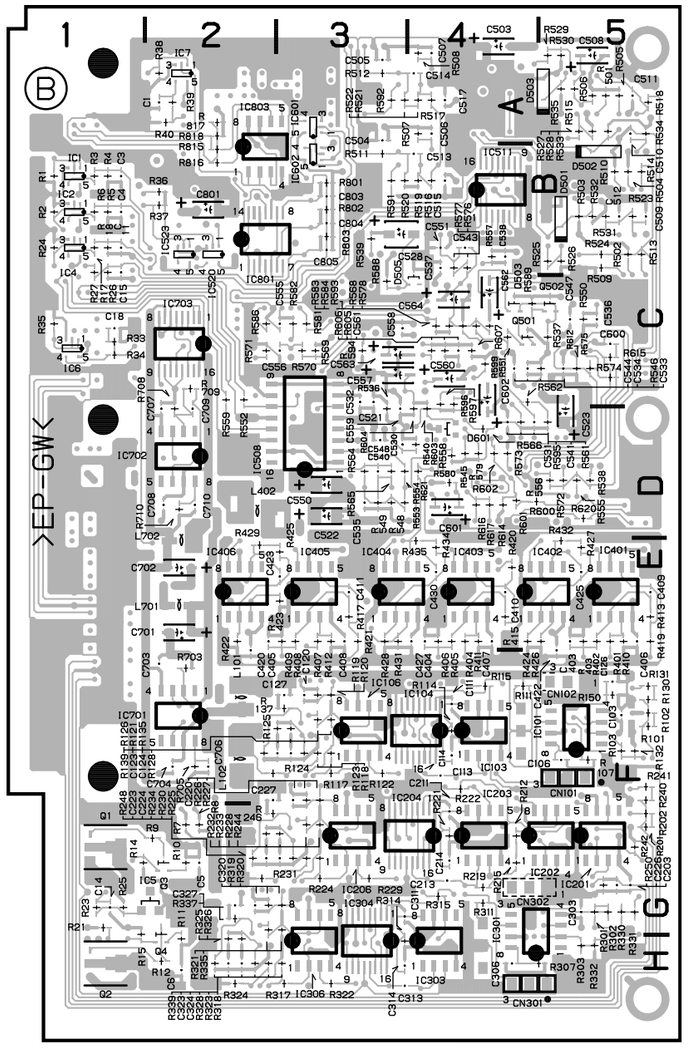

VDA-31 -B SIDE-
1-660-243-13

http://getMANUAL.com

AU-203 (1-660-244-13)

CN1	D1	C100	*F5	IC19	G1	R14	*D1
		C101	*B3	IC20	F1	R15	*B1
C1	*E1	C102	E3	IC21	*F4	R16	*H5
C2	*E1	C103	B2	IC22	C3	R17	*D1
C3	*E1	C104	*C3	IC23	E4	R18	*H5
C4	*E1	C105	B3	IC24	*E4	R19	*D1
C5	*E1	C106	B2	IC25	*F4	R20	*D1
C6	*E1	C107	B3	IC26	C4	R21	*A1
C7	H4	C108	*C3	IC27	C4	R22	*A1
C8	A5	C109	*C3	IC28	*B3	R23	G5
C9	D5	C110	*E4	IC29	E3	R24	*A1
C10	*G4	C111	E4	IC30	D3	R25	*A5
C11	*E1	C112	E4	IC31	*G5	R26	*A5
C12	B5	C115	*D4	IC32	*A3	R27	B5
C13	D5	C118	*F4	IC33	E4	R28	*D5
C14	*G4	C119	A2	IC34	*E4	R29	*D5
C15	G5	C120	*B1	IC35	*B1	R30	D5
C16	G4	C121	*E3	IC40	E3	R31	*G4
C17	G4	C122	*E4	IC41	C3	R32	*H5
C18	G4	C123	*E3	IC42	C3	R33	*A5
C19	*A5	C127	C2	IC43	D3	R34	*D5
C20	*D5	C128	C2	IC44	*E2	R35	*E1
C21	*A5	C129	*D3	IC45	F3	R36	*G5
C22	*D5	C130	*E3	IC46	*F2	R37	*A5
C23	F4	C131	*F3	IC47	*C2	R38	*D5
C24	B5	C132	C2	IC48	*C2	R39	*G4
C25	D5	C133	D2	IC49	*D2	R40	*G5
C26	*G4	C134	*D3	IC50	*F2	R41	*G4
C27	*G4	C135	*E2	IC51	*F2	R42	*G4
C28	*H3	C138	F2	IC60	*B1	R43	*G4
C29	*G3	C150	F2			R44	A4
C30	*H4	C152	F2	L1	A2	R45	B5
C31	*G4	C160	*E3			R46	D5
C32	B5	C161	*E4	Q1	H5	R47	*G5
C33	E5	C162	F4	Q2	G5	R48	*A5
C34	G3	C163	*F4	Q3	*E1	R49	*D5
C35	G4	C164	E4	Q4	*E1	R50	*G4
C36	H3	C200	*F2	Q5	*B1	R51	*G4
C37	H4	C201	B2	Q6	*H5	R52	*G5
C38	G3	C202	B2	Q7	H5	R53	A4
C39	H3	C203	D3	Q8	*G5	R54	*A5
C40	C5	C204	D2	Q9	*H4	R55	*D5
C41	C5	C205	*E3	Q10	*H4	R56	*A5
C42	F5	C206	*E3	Q11	*B5	R57	*D5
C43	F5	C207	E3	Q12	*E5	R58	*A5
C44	*B5	C208	E3	Q13	*H4	R59	*B5
C45	*E5	C209	E2	Q14	*H4	R60	B5
C46	A2			Q15	*B5	R61	*D5
C47	*G2	D1	*G4	Q16	*E5	R62	*D5
C48	*H2	D2	*H4	Q17	*G3	R63	E5
C49	*G2	D3	*G3	Q18	*G1	R64	*H3
C50	*H2	D4	*G3	Q19	*H3	R65	*H4
C51	*G1	D5	*H3	Q20	*H1	R66	*H4
C52	*H1	D6	*G3	Q21	F2	R67	*H4
C53	*G2	D7	*H3	Q22	*G2	R68	*A3
C54	G1	D8	*H3	Q23	*G2	R69	*B5
C55	H1	D9	*G2	Q24	*G2	R70	*B5
C56	G2	D10	*G2	Q25	*G2	R71	*B5
C57	G2	D11	*G2	Q26	G2	R72	*B5
C58	H2	D12	*G2	Q27	*H2	R73	*B5
C59	H2	D13	*H2	Q28	*H2	R74	*E5
C60	*H2	D14	*H2	Q29	*H2	R75	*E5
C61	*G2	D15	*H2	Q30	*H2	R76	*E5
C62	*H2	D16	*H2	Q31	*G3	R77	*E5
C63	*H1	D17	*G1	Q32	*H3	R78	*E5
C64	*G1	D18	*H1	Q33	*B3	R79	*H4
C65	*H1	D19	C4	Q34	*A4	R80	*A3
C66	*G1	D20	B4	Q35	*A4	R81	*A3
C67	*F4	D21	*C4	Q36	*A4	R82	*G3
C71	F3	D22	*C4	Q37	*A4	R83	*H4
C72	F3	D23	B3	Q38	*A2	R84	*H5
C73	C4	D24	B3	Q39	*B2	R85	A4
C74	F3	D25	B4	Q40	*A2	R86	*G4
C75	F3	D26	B4	Q41	*B2	R87	*G3
C76	*B4	D27	*A5	Q42	H5	R88	*H3
C77	*F3	D28	*A3	Q43	*H5	R89	*H4
C78	*F3	D40	G3	Q44	*B4	R90	*B5
C79	*B4			Q45	*F5	R91	*B5
C80	*B4	IC1	A2	Q46	G5	R92	*E5
C81	*C4	IC2	A3	Q50	*H3	R93	*E5
C82	*C4	IC3	A4	Q51	G3	R94	*B5
C83	*B4	IC4	*B5	Q52	*G4	R95	*E5
C84	*B4	IC5	*E5			R96	*G4
C85	*D4	IC6	*A4	R1	*H5	R97	*G4
C86	*E4	IC7	A4	R2	*H5	R98	*G3
C87	B4	IC8	*A3	R3	*H4	R99	*H4
C88	B4	IC9	*F3	R4	*E1	R100	*H3
C89	B4	IC10	*F2	R5	*E1	R101	*G3
C90	B4	IC11	*C5	R6	*E1	R102	*H3
C92	*F4	IC12	*E5	R7	*E1	R103	*G3
C93	B4	IC13	*A2	R8	*E1	R104	*H3
C94	B4	IC14	*C5	R9	*E1	R105	*G4
C95	*B3	IC15	*F5	R10	*E1	R106	*H4
C96	*B3	IC16	F2	R11	*A1	R107	*A4
C97	B3	IC17	*A2	R12	*A1	R108	*A4
C98	B3	IC18	G2	R13	*A1	R109	*A4
C99	*C4						

R110	*A4	R205	*A4	R300	*D4	RV2	D3
R111	*A3	R206	*D1	R301	*D3	RV3	F5
R112	*A3	R207	*B4	R302	*D3	RV4	D4
R113	*A3	R208	*B4	R303	*D3	RV5	F2
R114	*A3	R209	*B4	R304	*E3	RV8	F2
R115	*C5	R210	*B4	R305	*E3	RV9	E2
R116	*E5	R211	*D1	R306	*D3	RV10	F2
R117	*C5	R212	*G3	R307	*D3		
R118	*E5	R213	*G4	R308	*E3	S2	B5
R119	*C5	R214	*F4	R309	*E3	S3	D5
R120	*E5	R215	*D1	R310	*B1	S4	C5
R121	*G3	R216	*F4	R311	*D3	S5	E5
R122	*H3	R217	*D1	R312	*D3	S6	F4
R123	*G3	R218	*D1	R313	*D3	S7	F4
R124	*H3	R219	*D1	R314	*D3	S8	F4
R125	*A2	R220	*F4	R315	*D4	S9	F5
R126	*A2	R221	*D1	R316	*D4	S10	D3
R127	*A2	R222	*B4	R317	*D4	S11	D4
R128	*H5	R223	*B4	R318	*D3	S12	D3
R129	*G3	R224	*C4	R319	*D3	S13	D4
R130	*G2	R225	*D1	R320	*D3	S14	D2
R131	*G1	R226	*C4	R321	*E4	S15	E2
R132	*H3	R227	*D4	R322	*E4		
R133	*H2	R228	*B4	R323	*D2	TP1	D2
R134	*H2	R229	*B4	R324	*E3	TP2	F3
R135	*H2	R230	*E4	R325	*E2		
R136	*H2	R231	*E3	R326	*E2	W1	F2
R137	*H1	R232	F3	R327	*E2	W2	E2
R138	*G2	R233	*F4	R328	*B1	W1Z	A5
R139	*G2	R234	*E3	R329	*C1	W2Z	D5
R140	*G2	R235	*G4	R330	*F2		
R141	*G1	R236	*F3	R331	F3	*:B SIDE	
R142	*H1	R237	*G4	R332	F3		
R143	*A2	R238	*E3	R335	*F2		
R144	*C5	R239	*F4	R338	*F3		
R145	*F5	R240	*C4	R339	C2		
R146	*G3	R241	*B2	R340	C2		
R147	*H3	R242	*A3	R341	D2		
R148	*A2	R243	*B3	R342	C2		
R149	*G1	R244	*B2	R343	*D2		
R150	*H1	R245	*B3	R344	*D3		
R151	*G2	R246	*B3	R345	*E2		
R152	*G2	R247	*B3	R346	*F3		
R153	*G2	R248	*B3	R347	*C2		
R154	*G2	R249	*F4	R348	*C2		
R155	*H2	R250	*C4	R349	*D2		
R156	*H2	R251	*C4	R350	*E2		
R157	*H2	R252	*C4	R355	*C3		
R158	*H2	R253	*C4	R356	*C3		
R159	*A1	R254	*C4	R357	*D2		
R160	*G1	R255	*C4	R358	*E2		
R161	*H1	R256	*D4	R360	*F2		
R162	*A1	R257	*D3	R361	*C2		
R163	*A1	R258	*E3	R362	*C2		
R164	*A1	R259	*A1	R363	*D2		
R165	*C5	R260	*C3	R364	*E2		
R166	*G3	R261	*A3	R365	*E2		
R167	*H3	R262	*B3	R366	*F2		
R168	*C5	R263	*E4	R367	*F2		
R169	*F5	R264	*F5	R370	F2		
R170	*C5	R265	*D3	R372	*C1		
R171	*F5	R266	F4	R373	*C1		
R172	*F5	R267	F4	R374	*D2		
R173	*C5	R268	*F5	R375	*D2		
R174	*C5	R269	*F5	R376	*D2		
R175	*G2	R270	*D4	R377	*D2		
R176	*H2	R271	*B3	R378	*D2		
R177	*C5	R272	*B3	R379	*E2		
R178	*F5	R273	*D4	R380	*E2		
R179	*F5	R274	E4	R381	*E2		
R180	*H1	R275	*B3	R382	*F2		
R181	*F5	R276	*F5	R383	*F2		
R182	*G1	R277	*E4	R384	*F1		
R183	*H1	R278	*F3	R386	*C1		
R184	*G1	R279	*F3	R387	*C2		
R185	*H2	R280	*F3	R393	*F1		
R186	*F1	R281	*F3	R395	*F1		
R187	*G2	R282	*B3	R396	*C1		
R188	*H1	R283	E4	R397	*C1		
R189	*F1	R284	*C3	R398	*D2		
R190	*G1	R285	*C3	R399	*E2		
R191	*H1	R286	*E4	R405	*F1		
R192	*G1	R287	*F5	R407	*B1		
R193	*F1	R288	*D2	R409	*F1		
R194	*F1	R289	*D2	R410	*E3		
R195	*H1	R290	*F5	R411	F3		
R196	*G1	R291	*D4	R500	G4		
R197	*H1	R292	E3	R501	G4		
R198	*G1	R293	*F4	R502	*H4		
R199	F3	R294	*F5	R503	*H3		
R200	*B4	R295	*D4	R504	*B1		
R201	F3	R296	*D4	R507	*A1		
R202	*A4	R297	*F5	R508	*A1		
R203	*B4	R298	*E4	R610	G5		
R204	*B4	R299	*A2				
				RV1	F4		

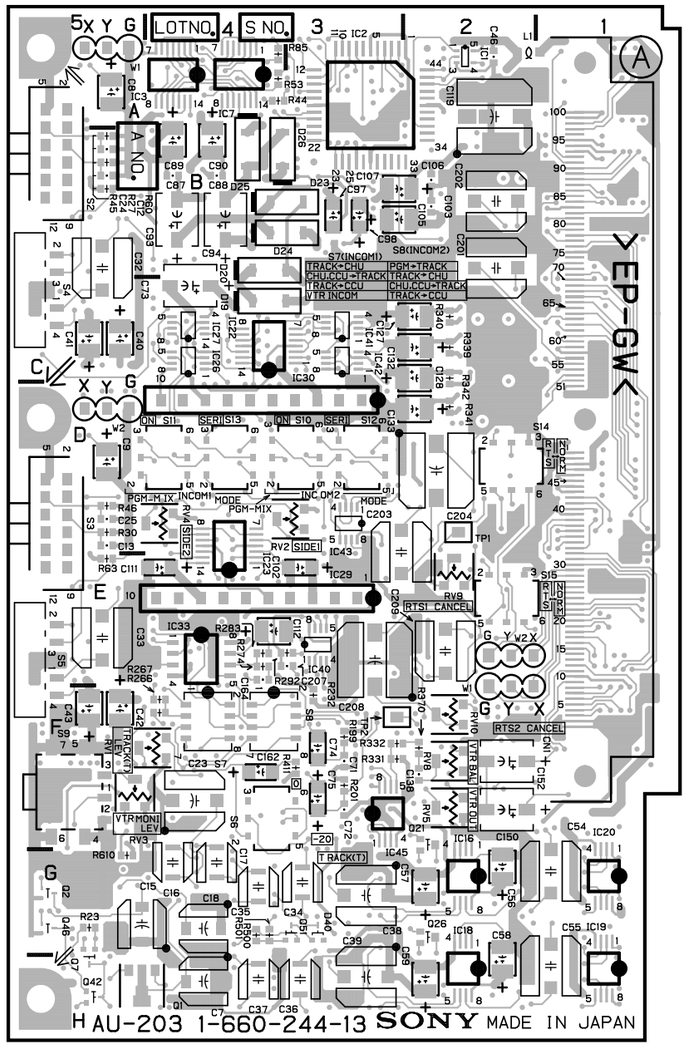

HDC-700 (SY) : S/N 10078 and Higher
HDCA-750 (SY) : S/N 10096 and Higher

AU-203 -A SIDE-
1-660-244-13

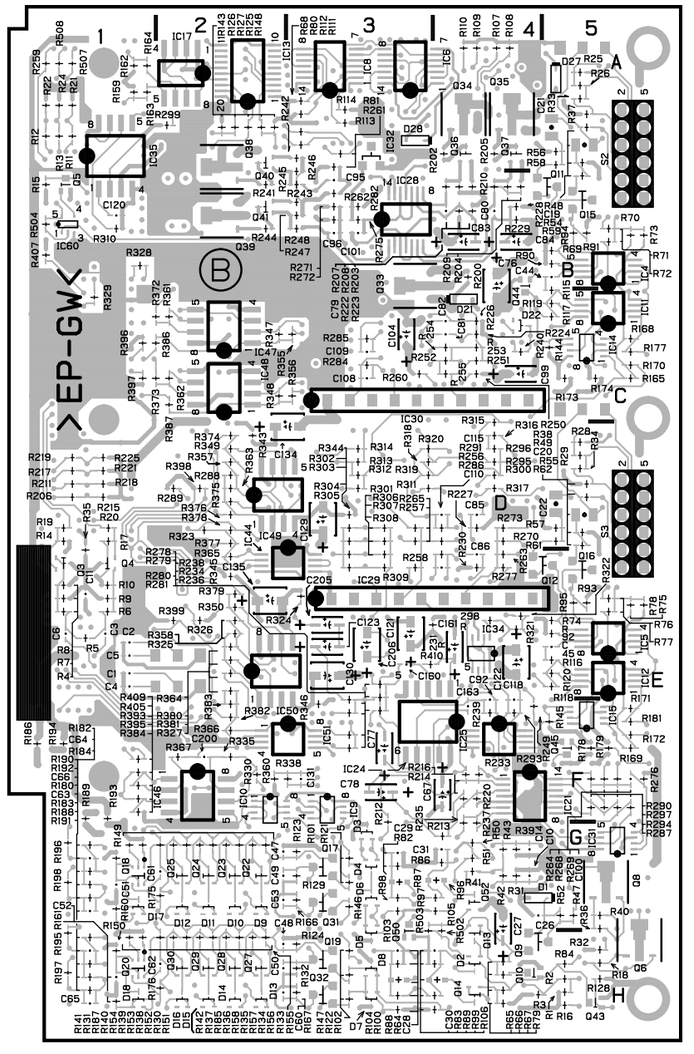

AU-203 -B SIDE-
1-660-244-13

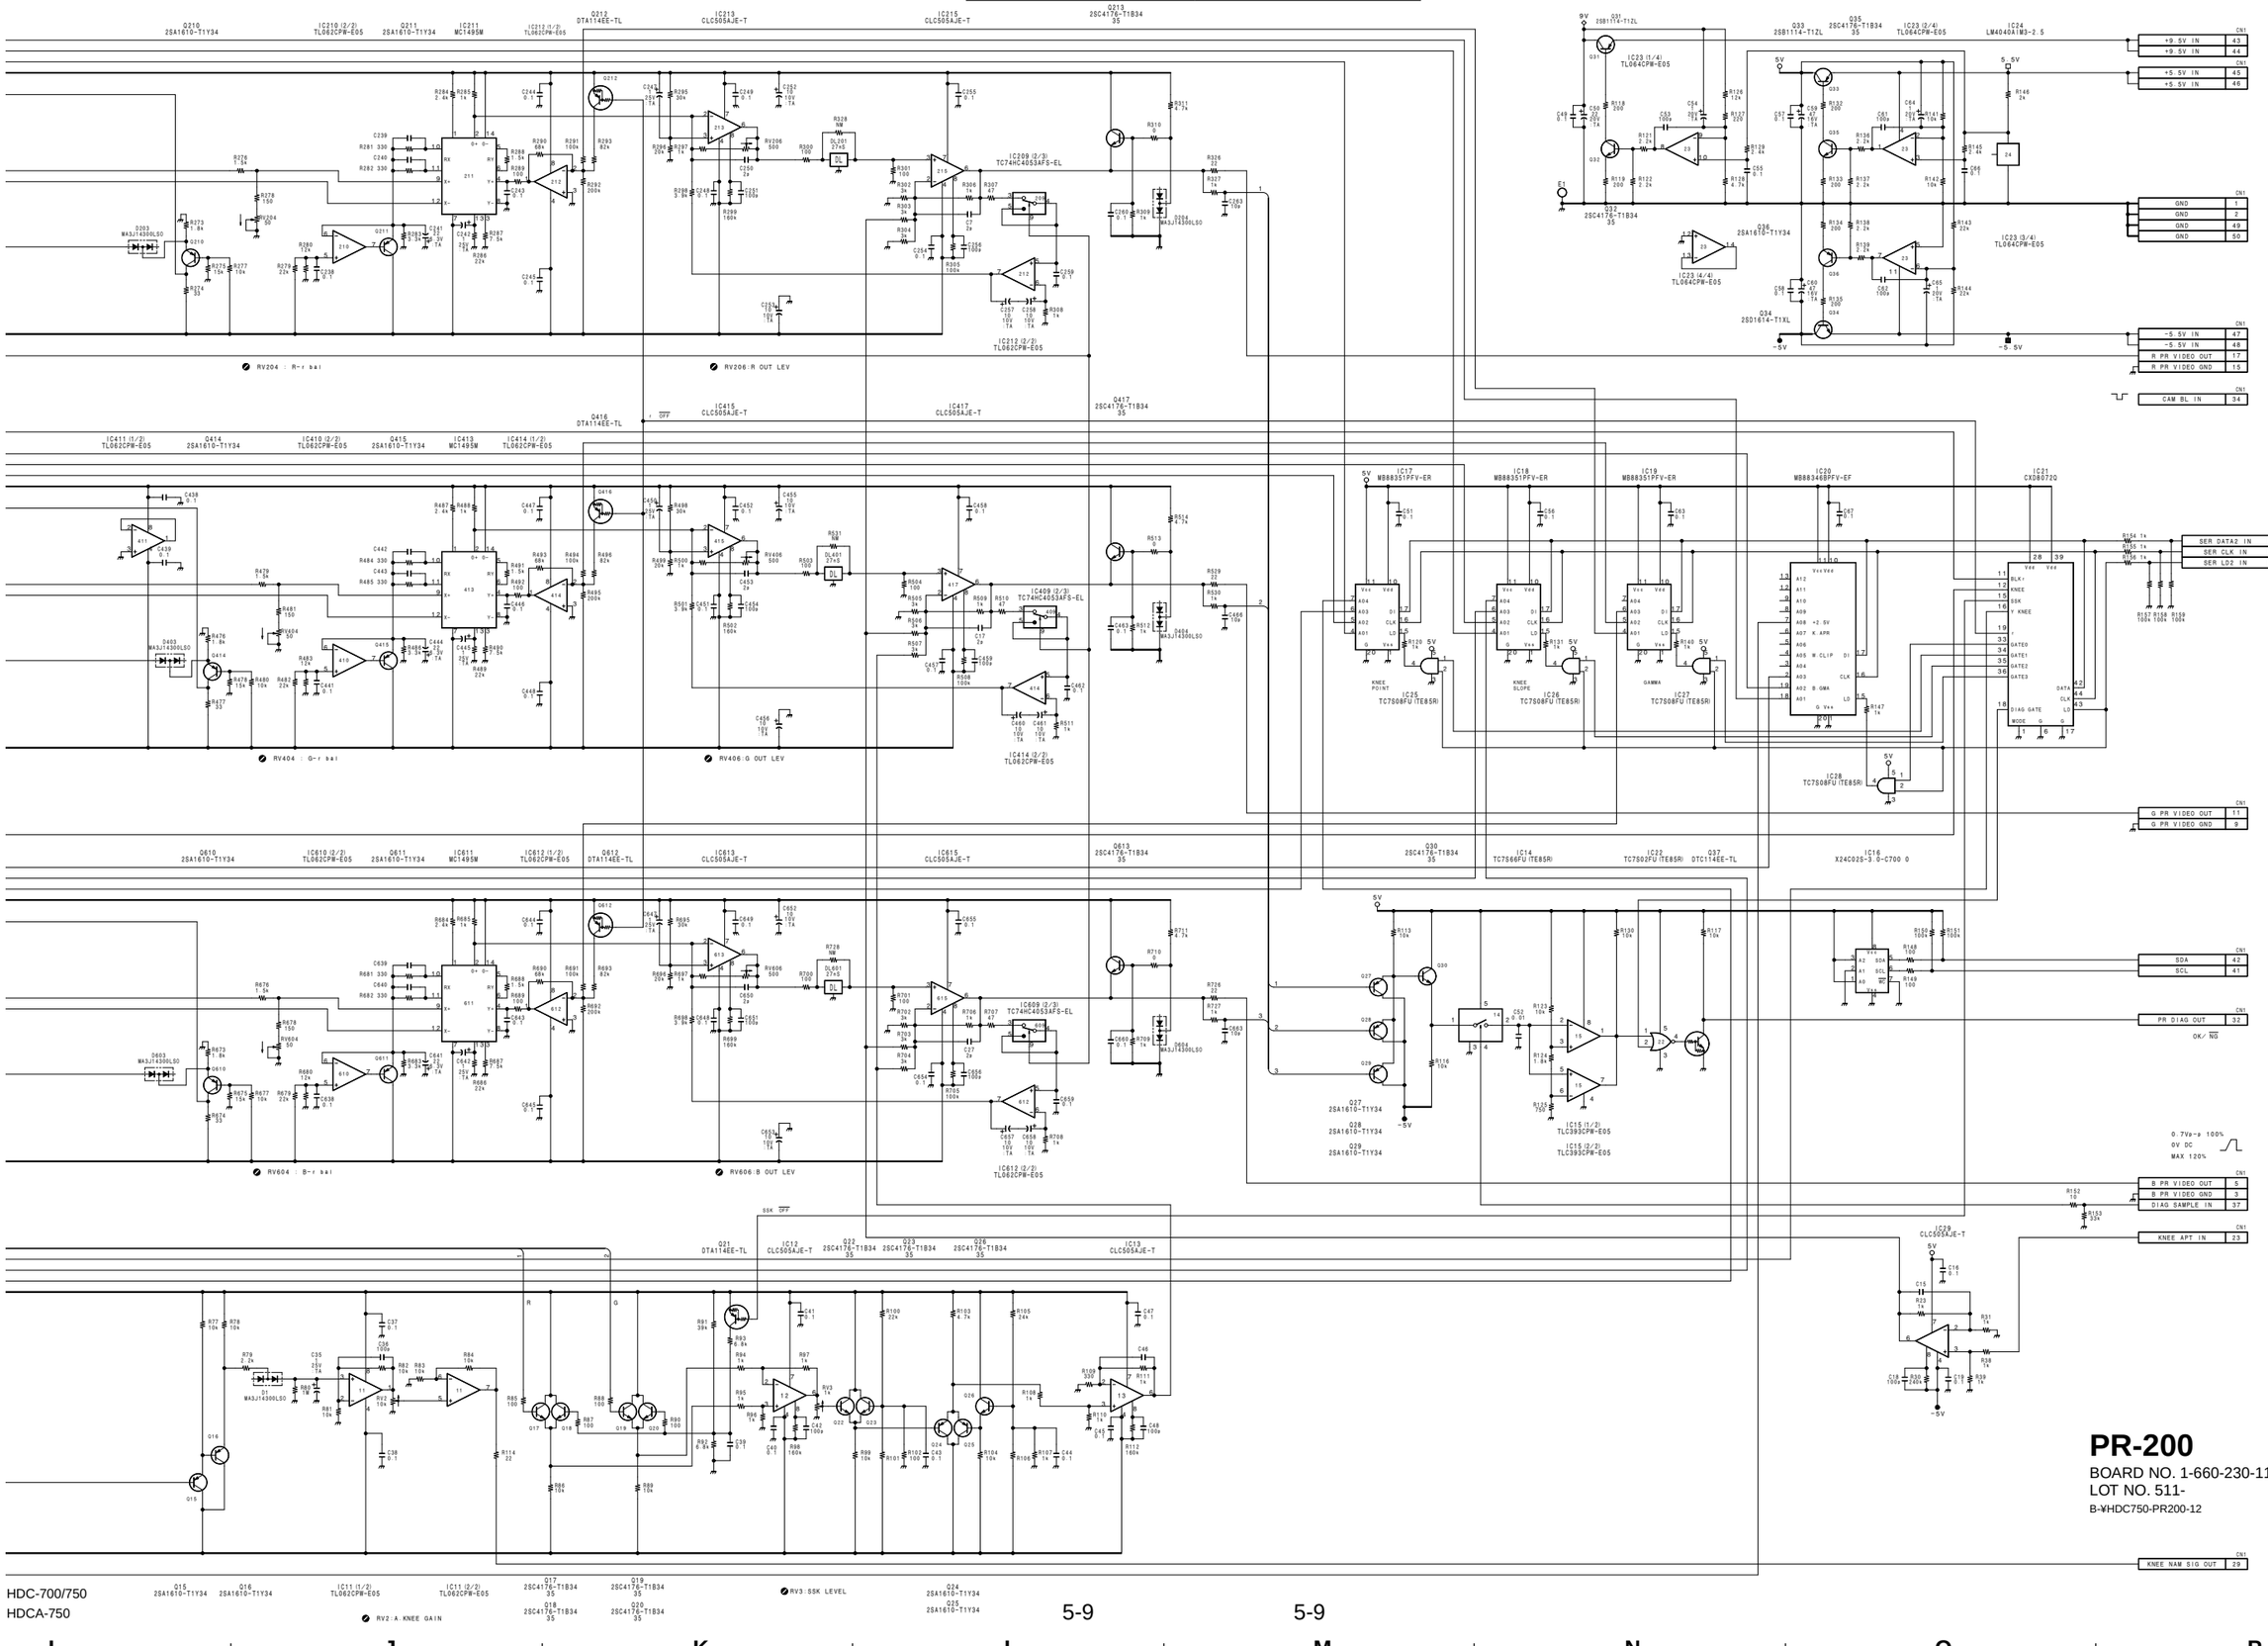

HDC-700/750
HDCA-750

5-9 5-9

PR-200
BOARD NO. 1-660-230-11/12
LOT NO. 511-
B-¥HDC750-PR200-12

HDC-700 (SY)
HDC-750 (SY)

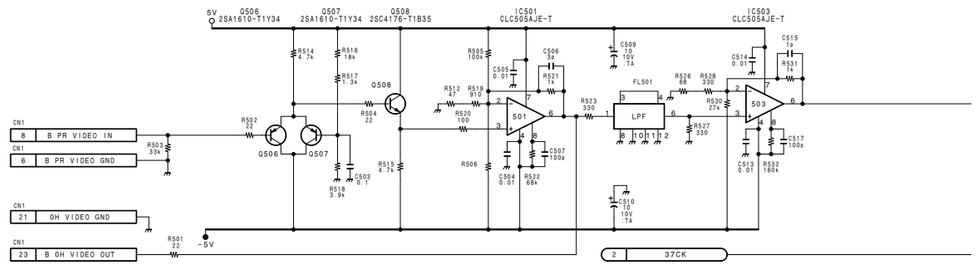

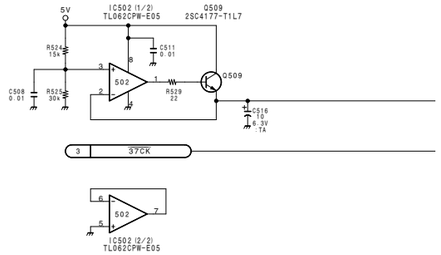

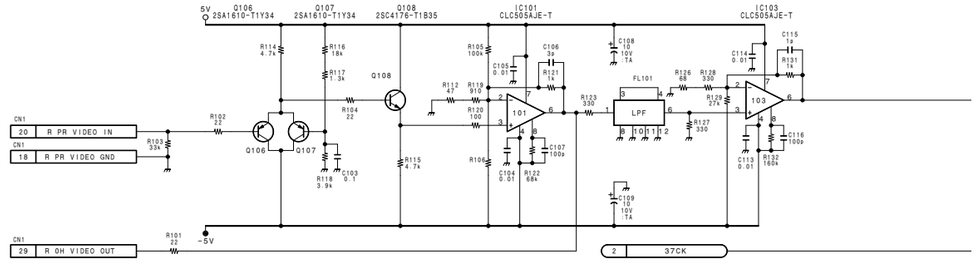

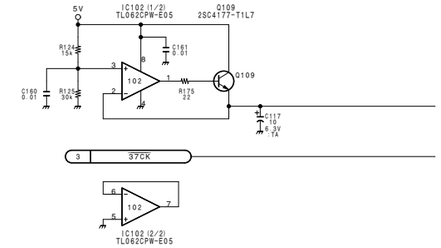

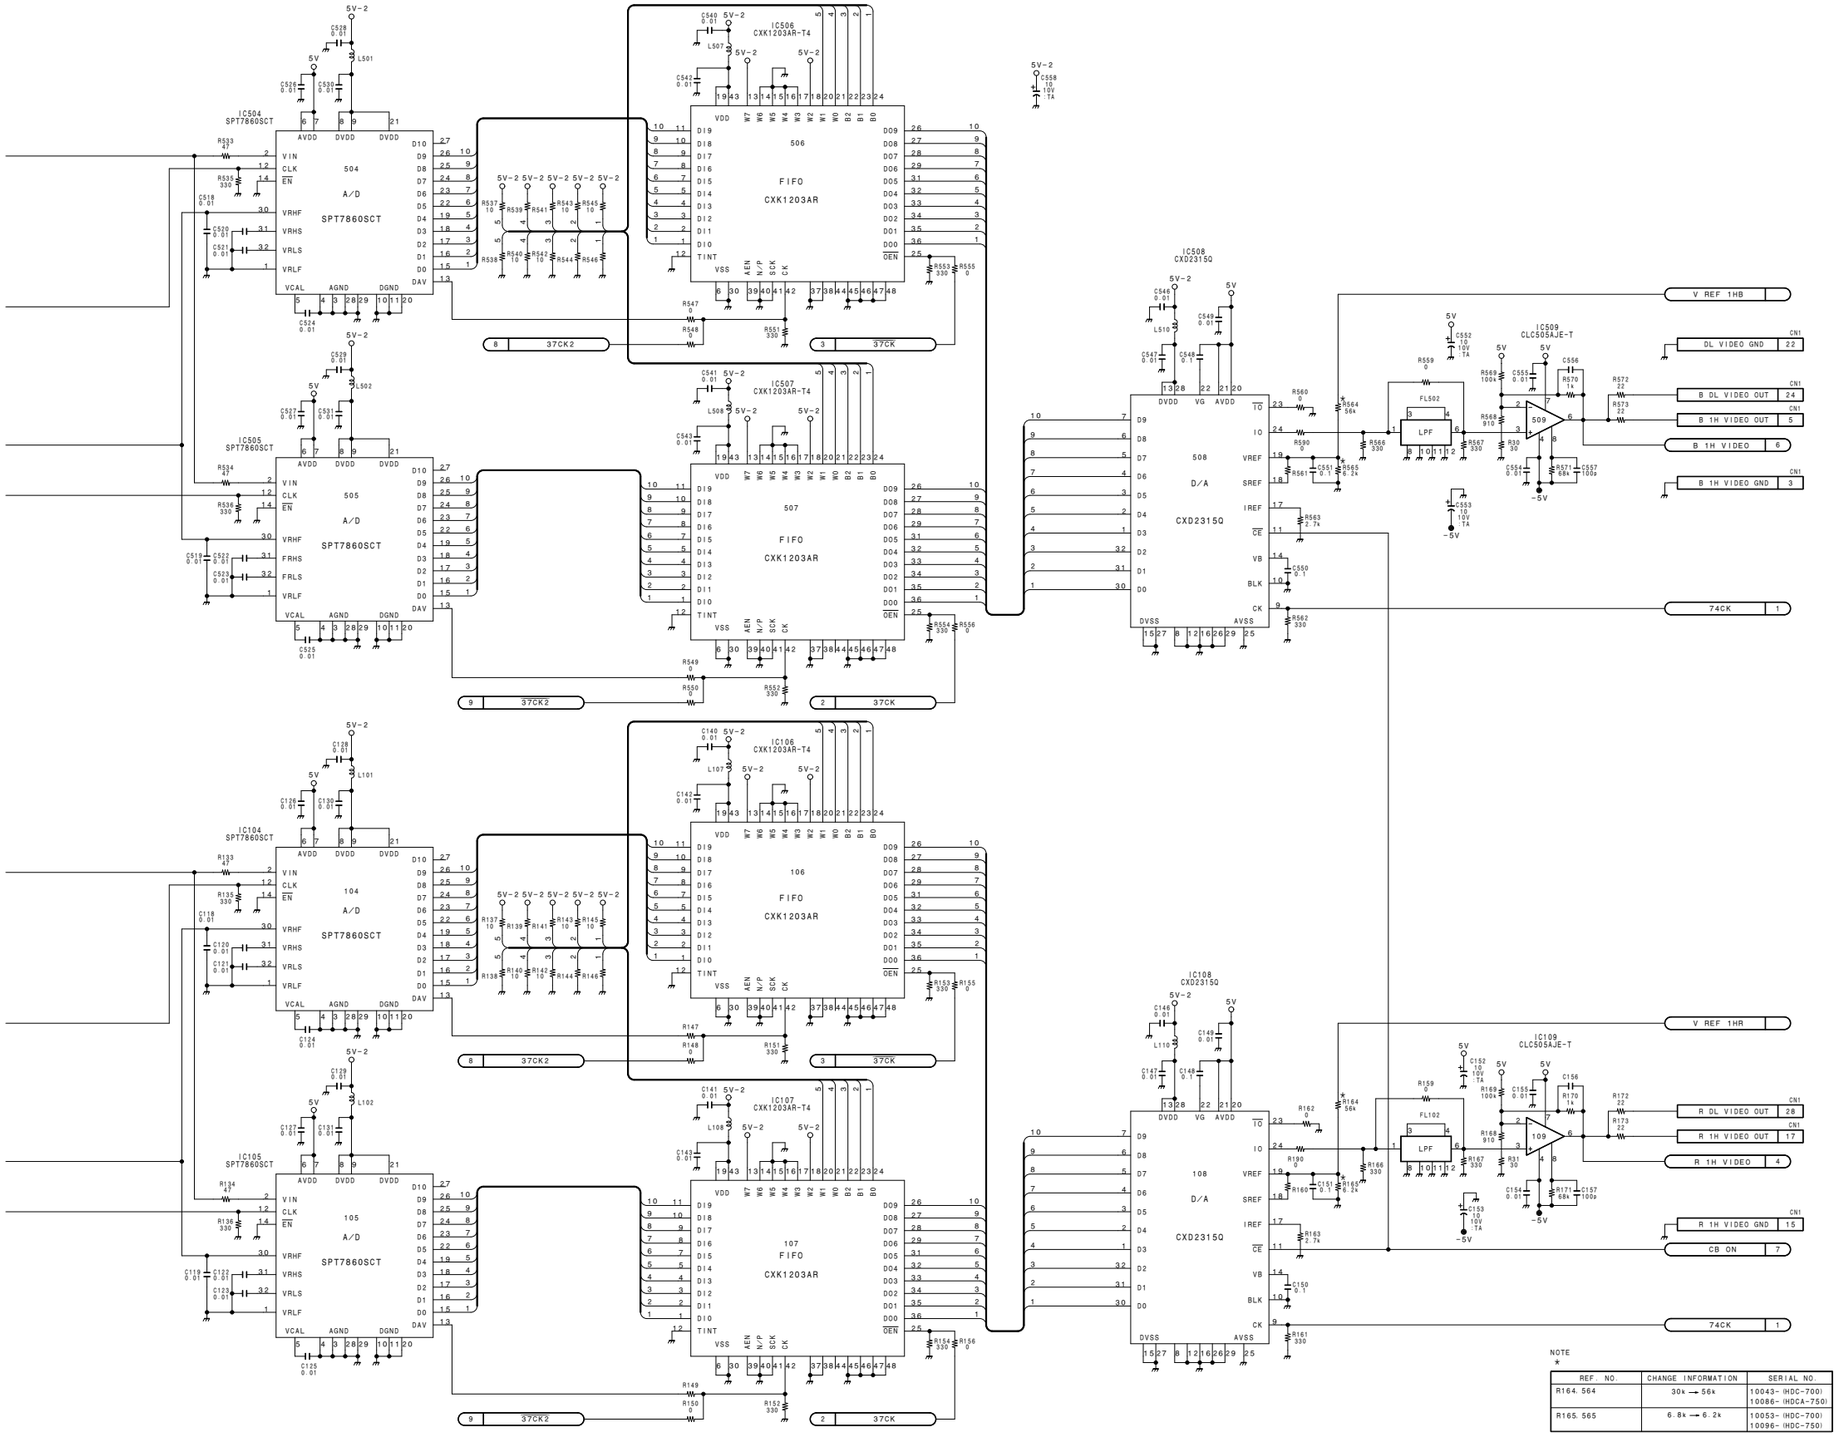

DL-65 (1/2)

BOARD NO. 1-660-239-11/12/13/14
LOT NO. 511-
B-¥HDC750-DL65-13

NOTE
*

REF. NO.	CHANGE INFORMATION	SERIAL NO.
R164. 564	30k → 56k	10043- (HDC-700) 10086- (HDCA-750)
R165. 565	6.8k → 6.2k	10053- (HDC-700) 10096- (HDC-750)

HDC-700 (SY)
HDC-750 (SY)

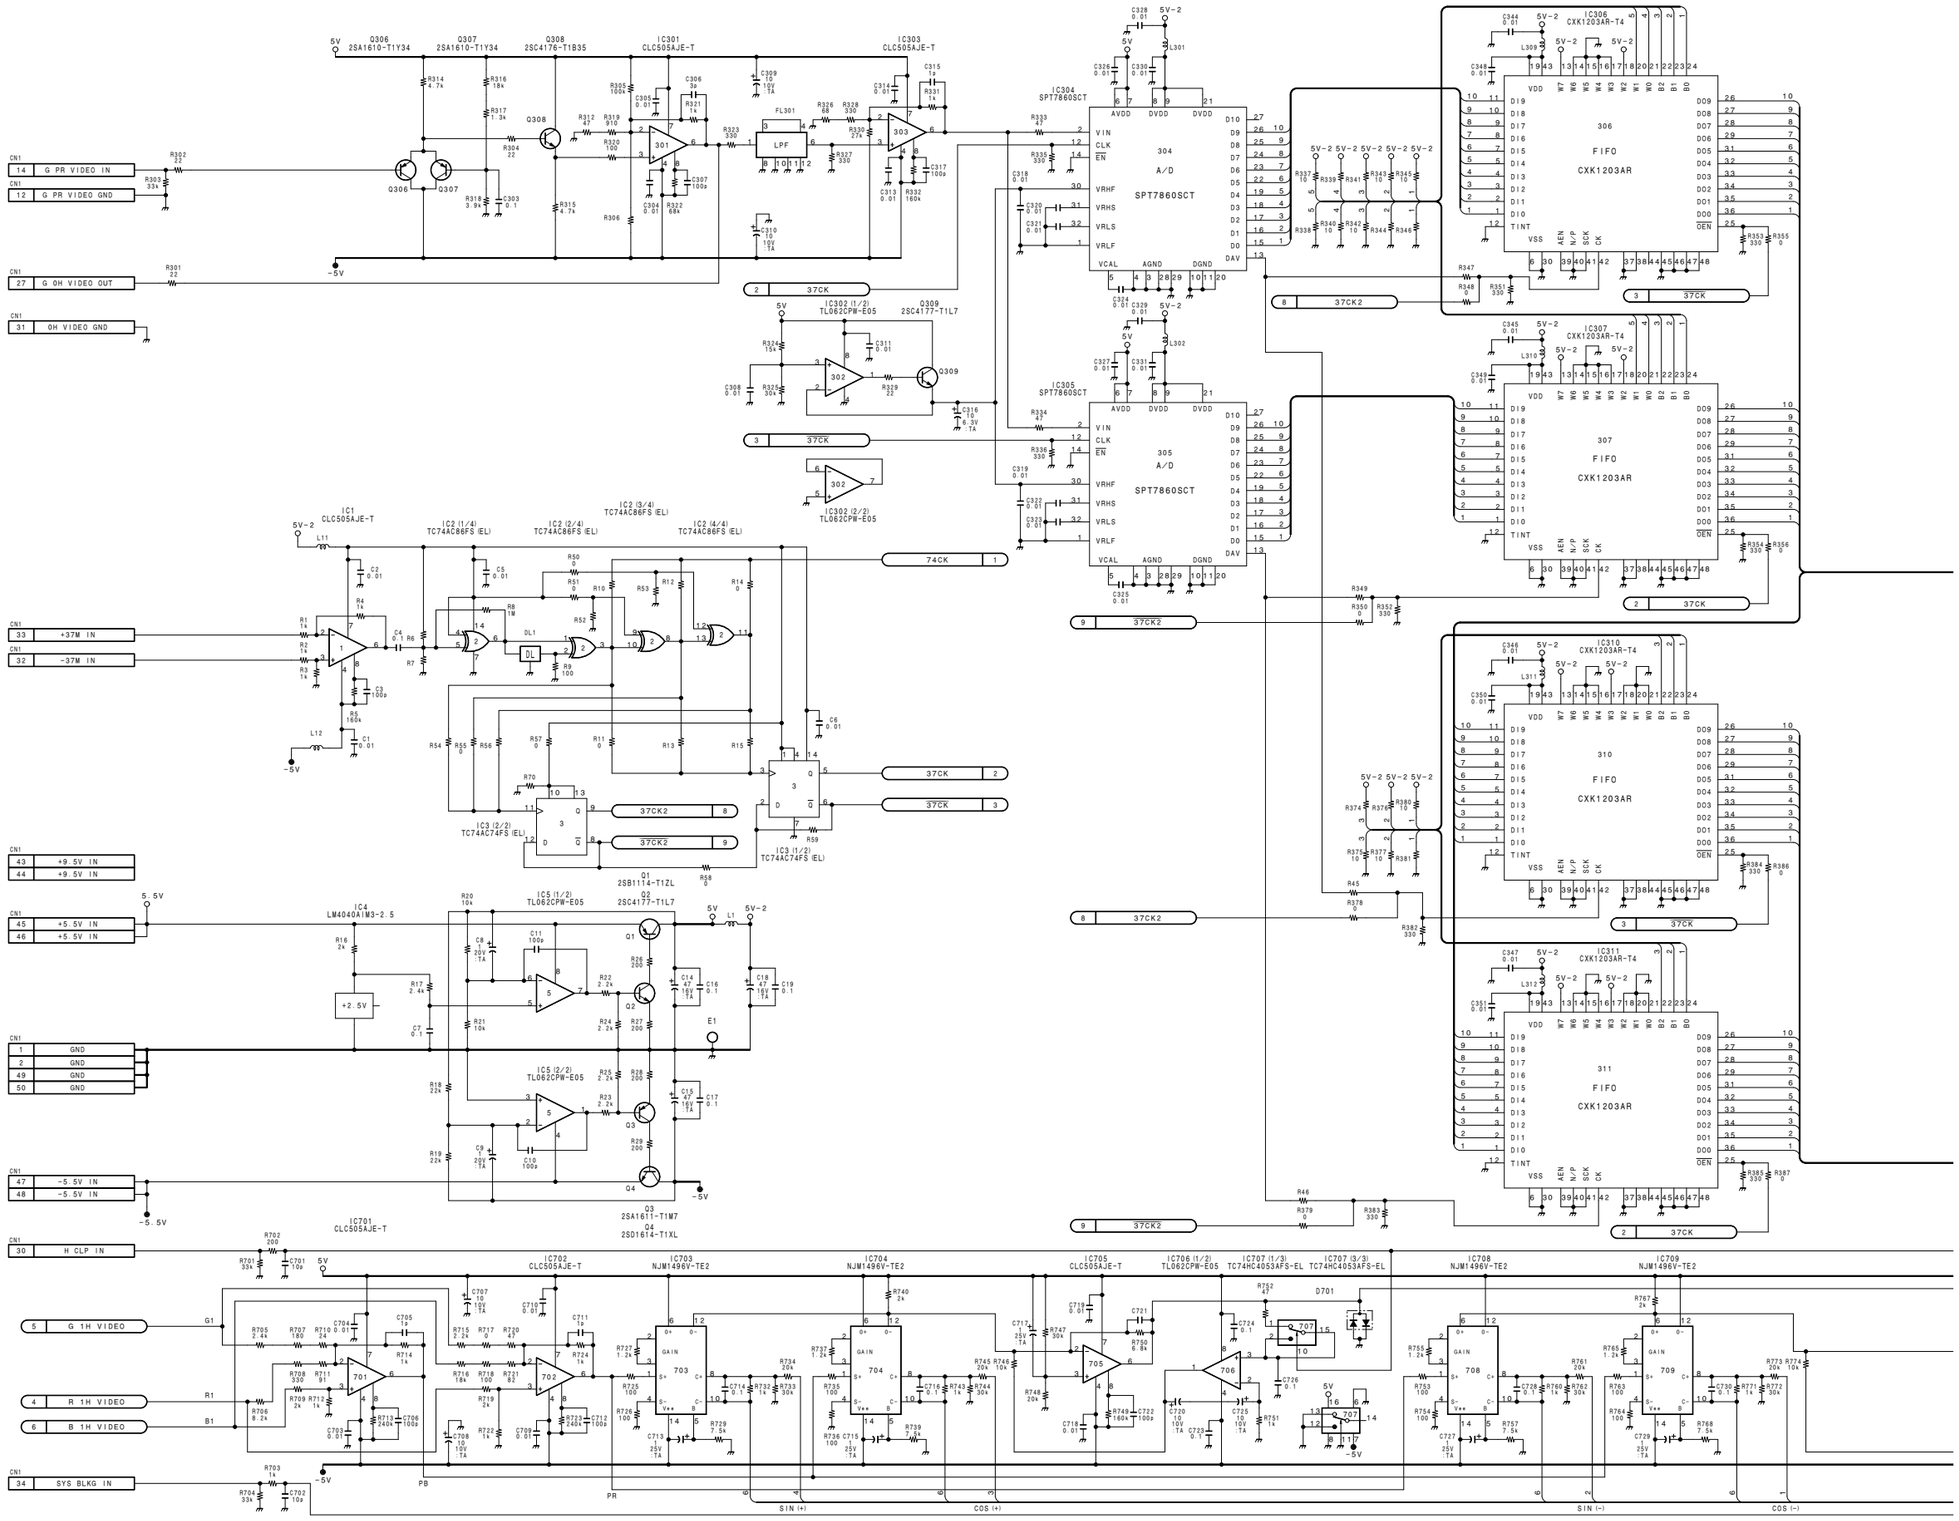

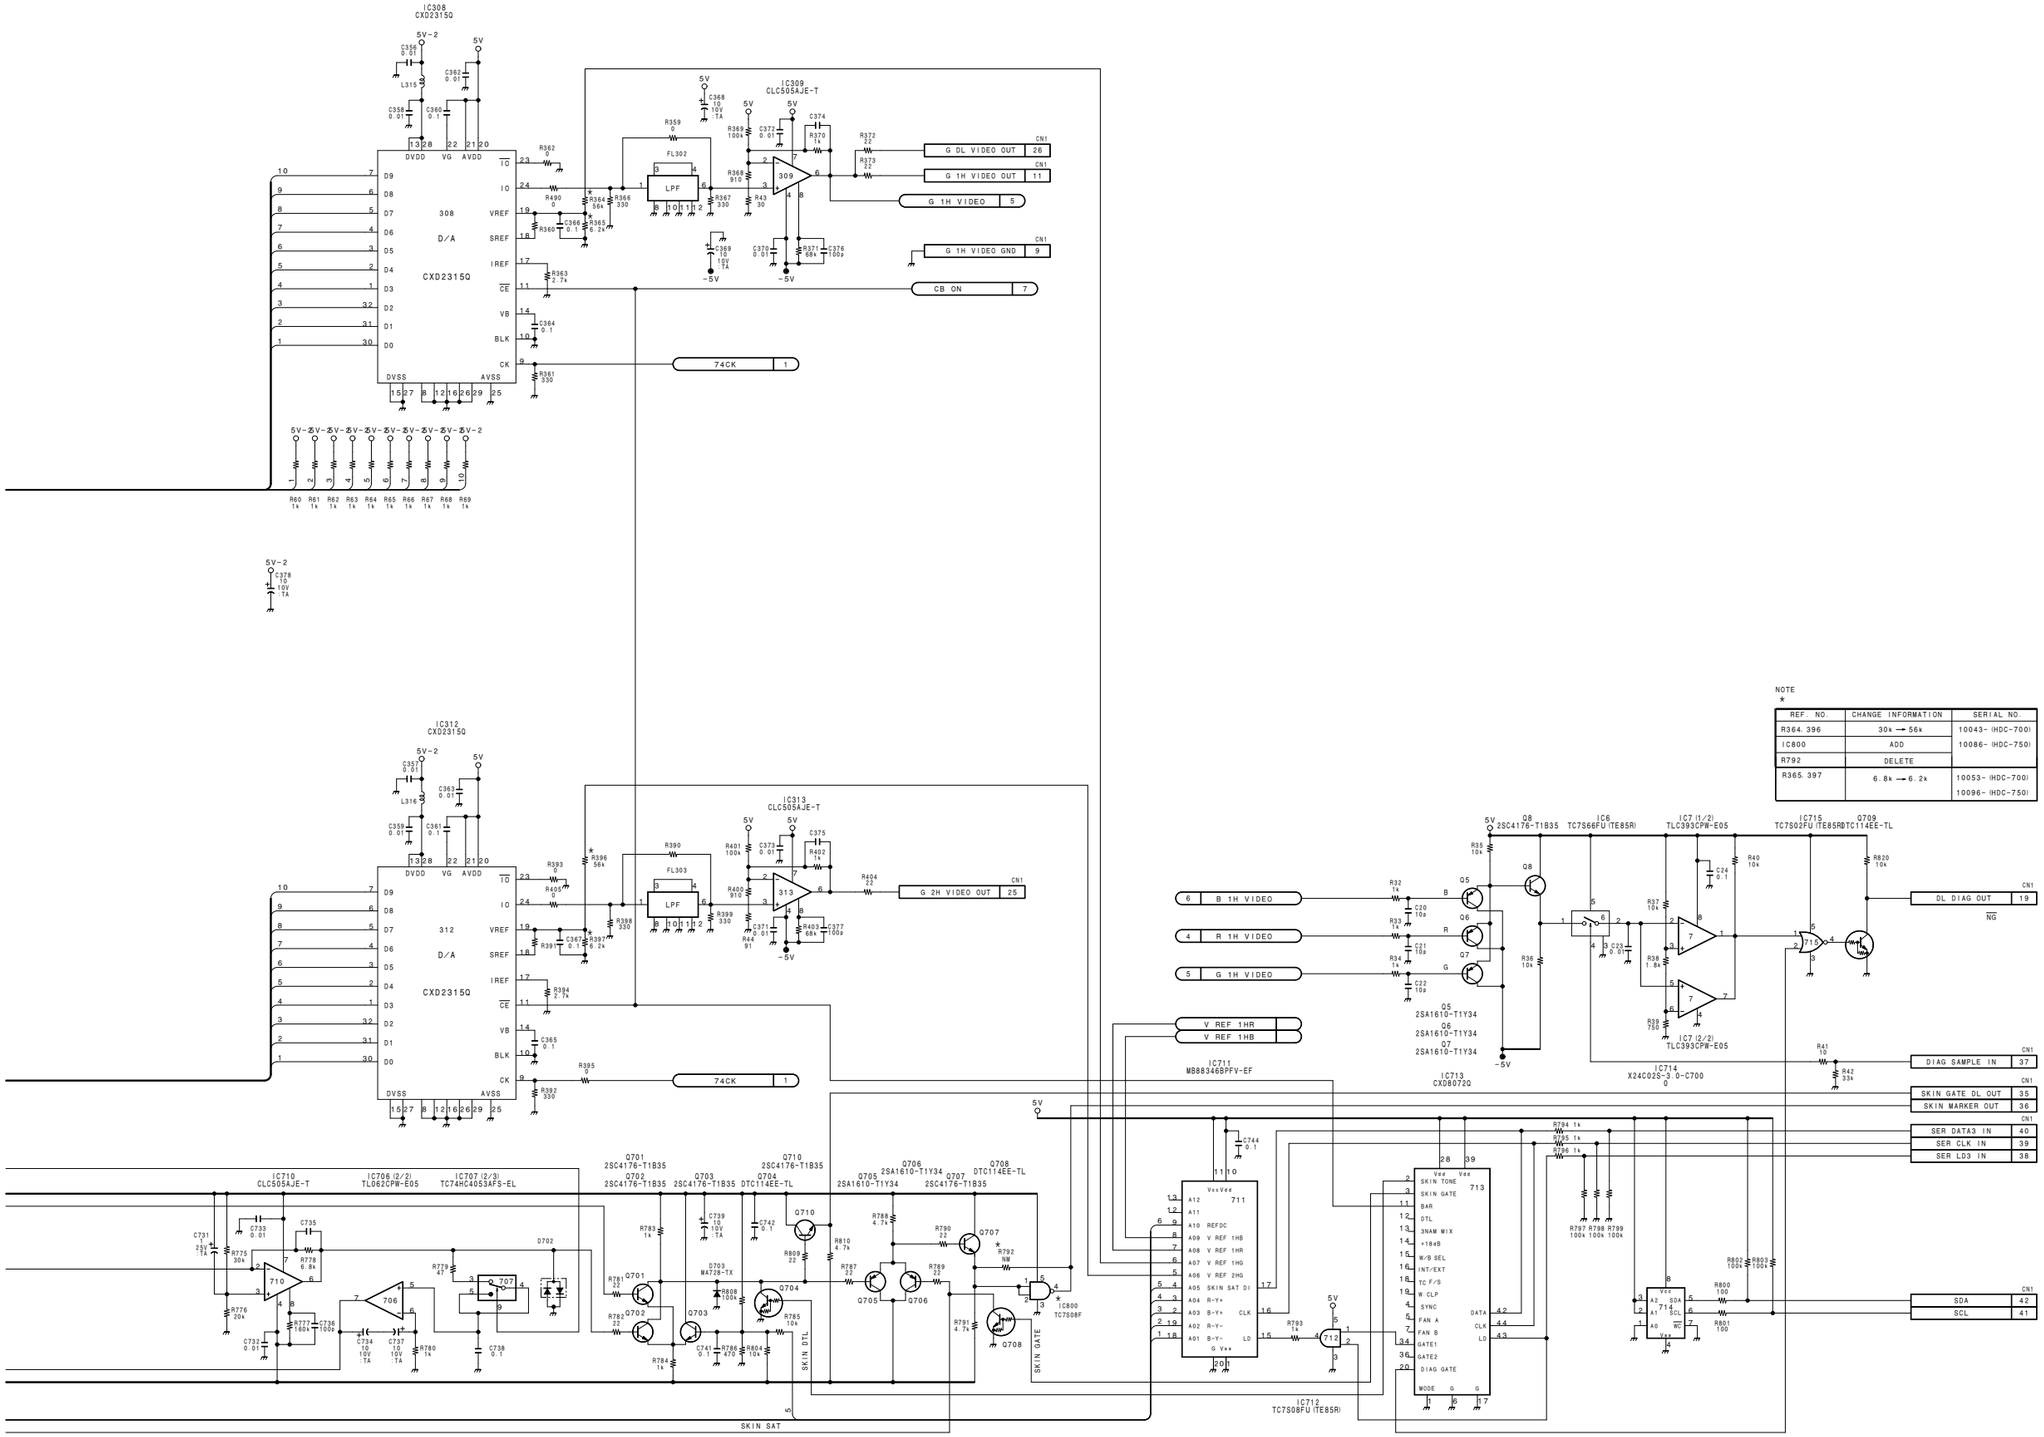

NOTE
*

REF. NO.	CHANGE INFORMATION	SERIAL NO.
R364, 396	30k ⟶ 56k	10043- (HDC-700)
IC800	ADD	10086- (HDC-750)
R792	DELETE	
R365, 397	6.8k ⟶ 6.2k	10053- (HDC-700)
		10096- (HDC-750)

DL-65 (2/2)

BOARD NO. 1-660-239-11/12/13/14
LOT NO. 511-
B-₩HDC750-DL65-13

HDC-700 (SY)
HDC-750 (SY)

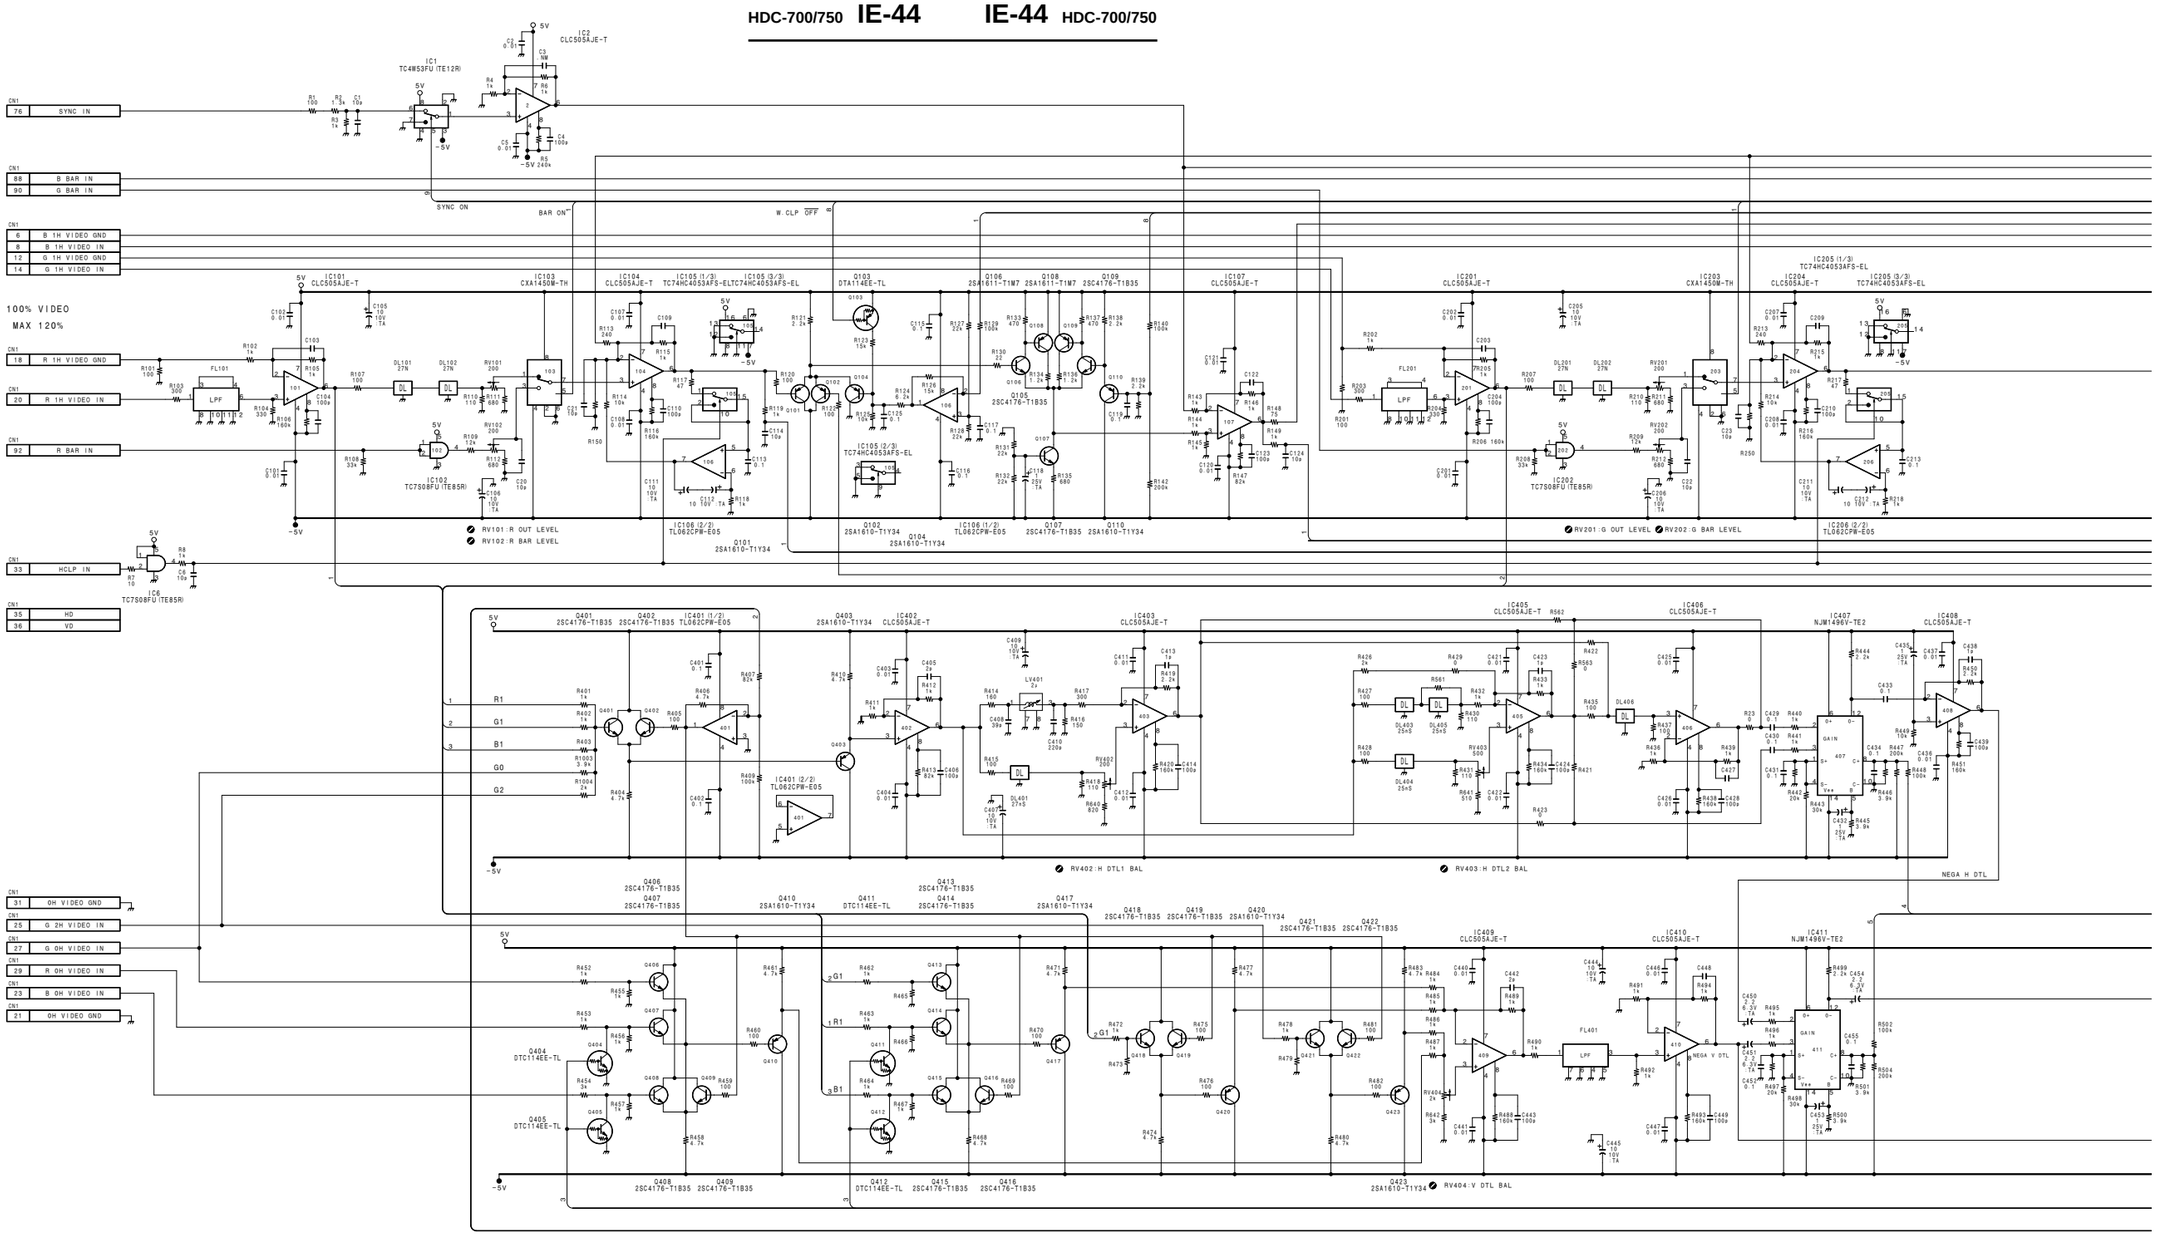

1

2

3

4

5

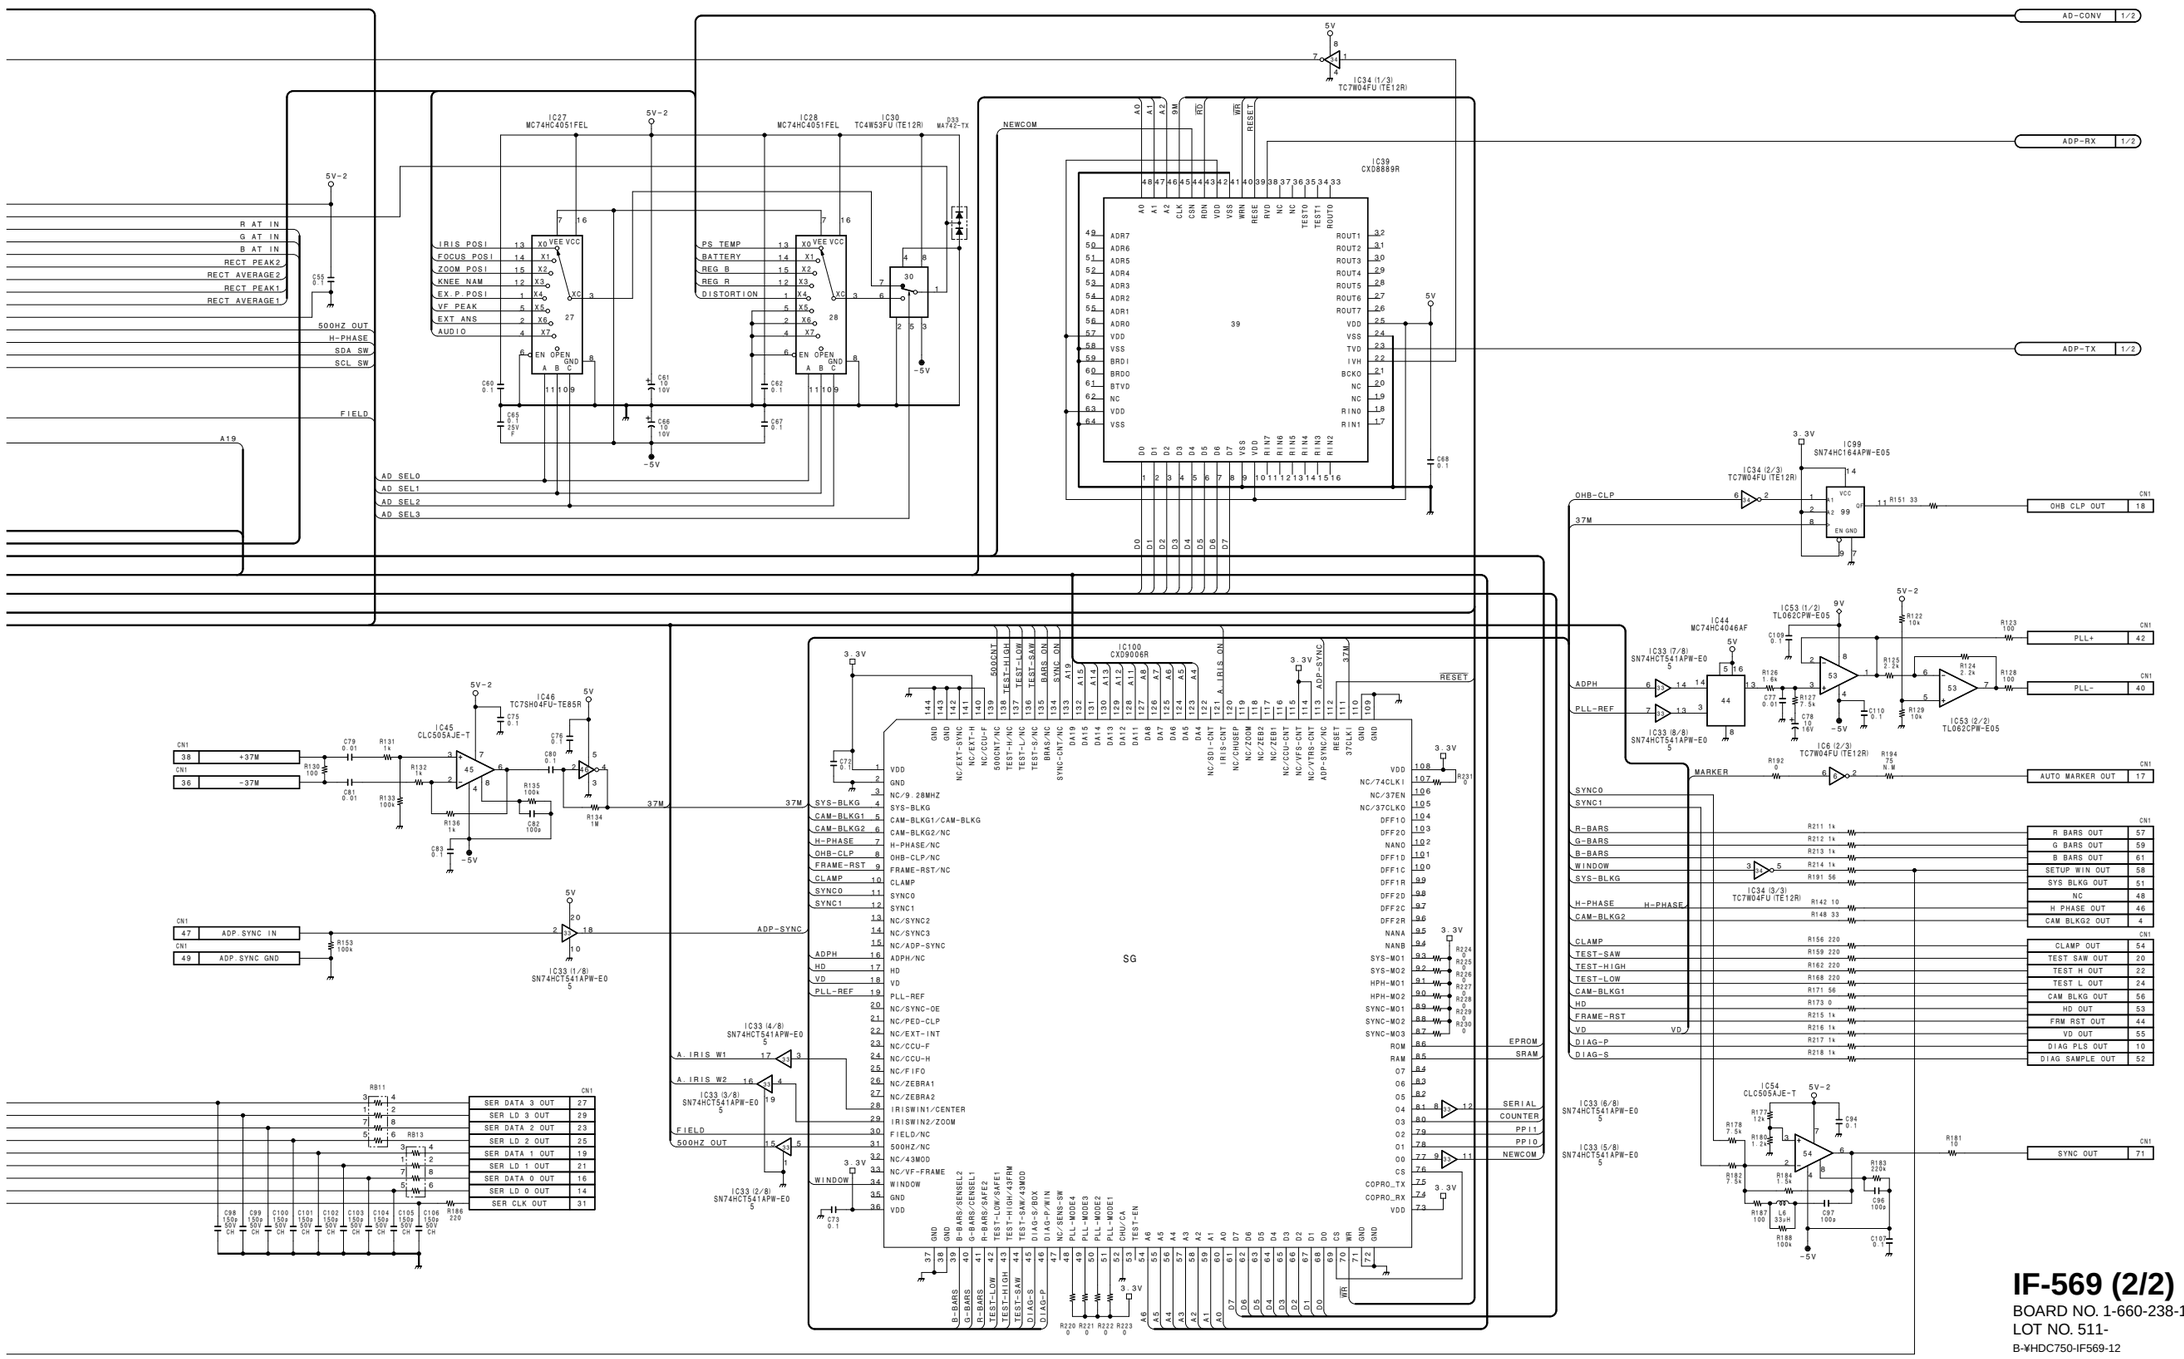

IF-569 (2/2)
BOARD NO. 1-660-238-11/12
LOT NO. 511-
B-¥HDC750-IF569-12

HDC-700 (SY) : S/N 10053 and Higher
HDCA-750 (SY) : S/N 10096 and Higher

5-20 (a) 5-20 (a)

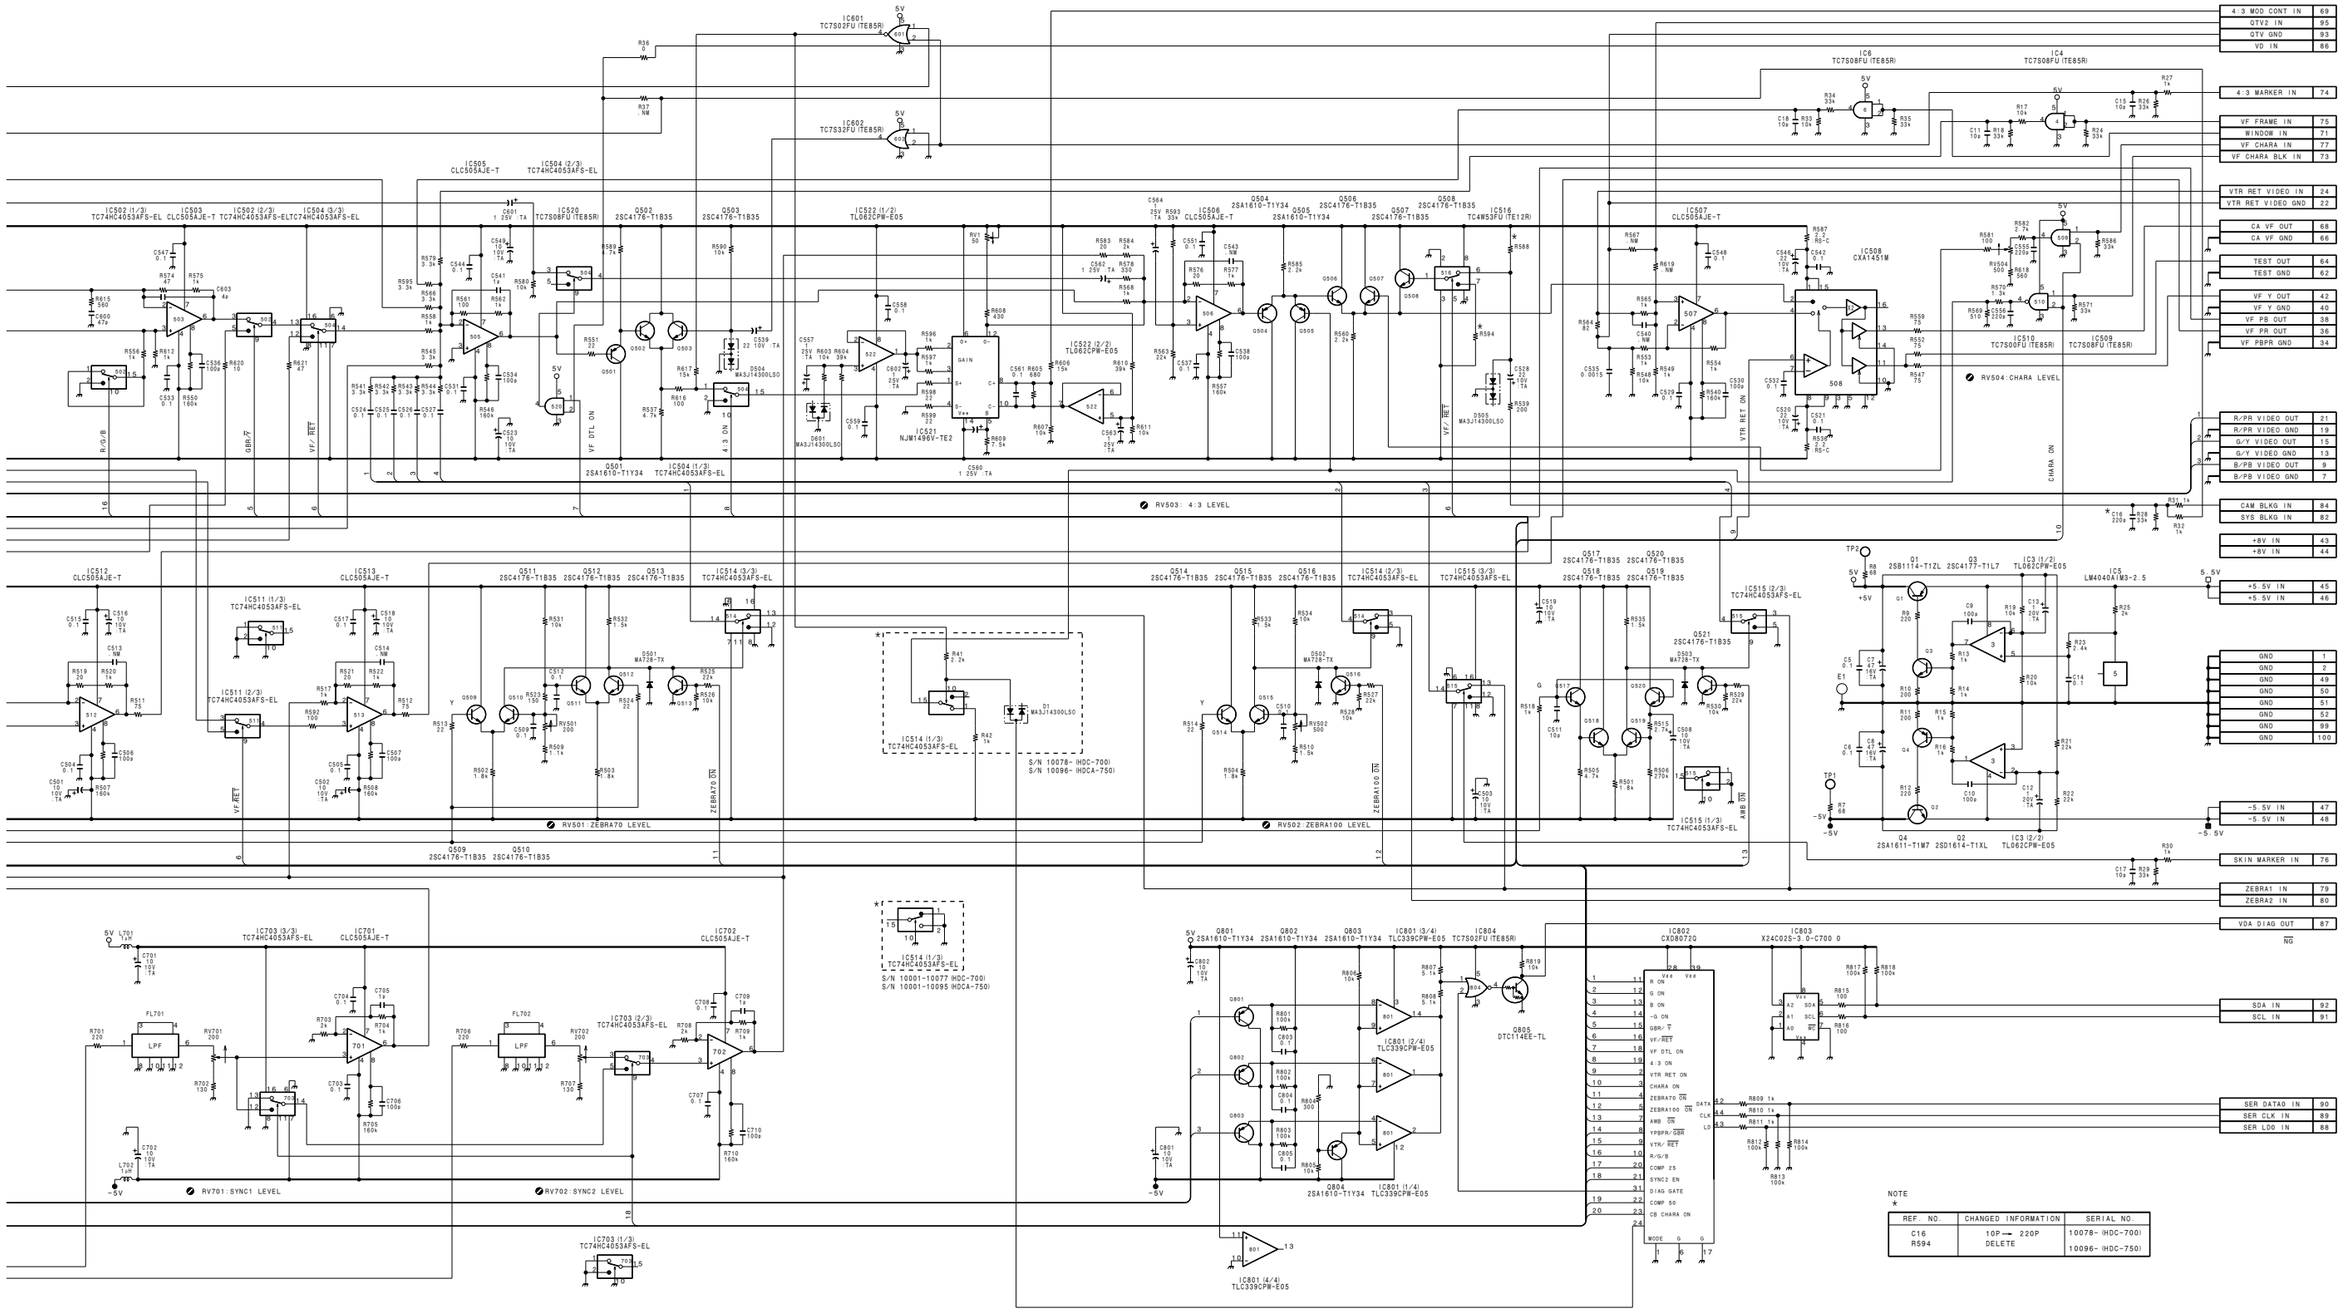

VDA-31

BOARD NO. 1-660-243-13/14
LOT NO. 611-
B-¥HDCA750-VDA31-14

DU-24

BOARD NO. 1-663-250-11
LOT NO. 603-
B-¥HDCA750-DU24-11

HDC-700 (SY) : S/N 10001 through 10052
HDCA-750 (SY) : S/N 10001 through 10095

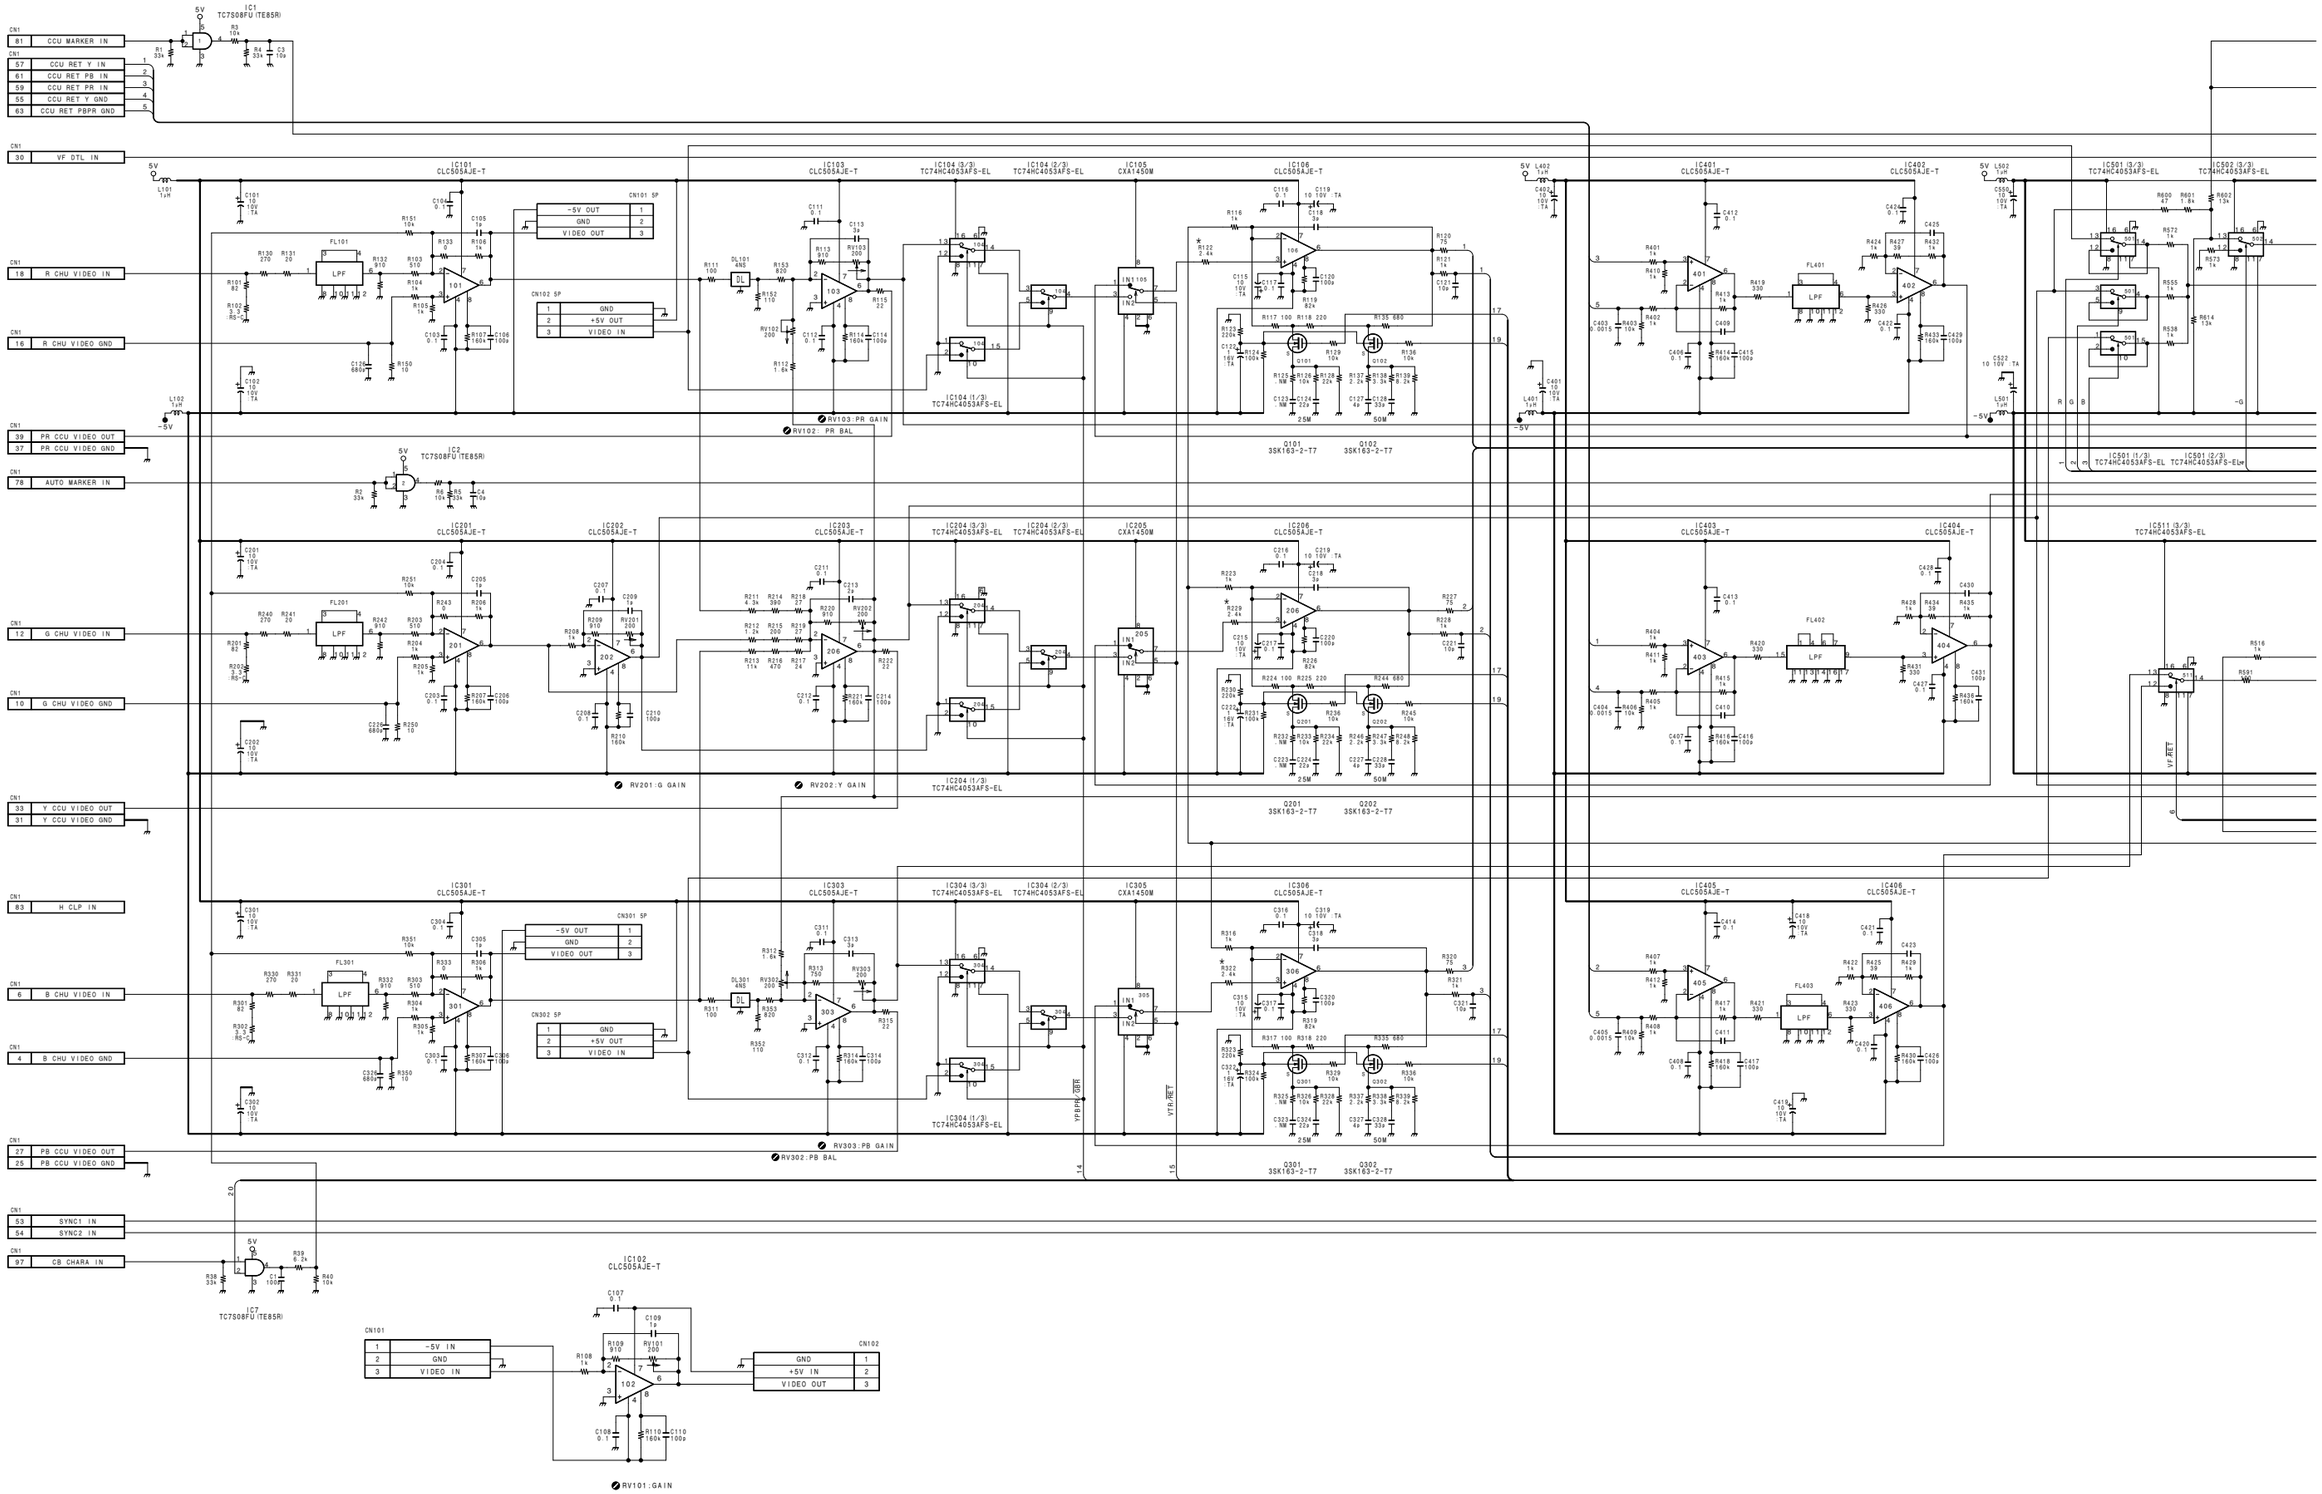

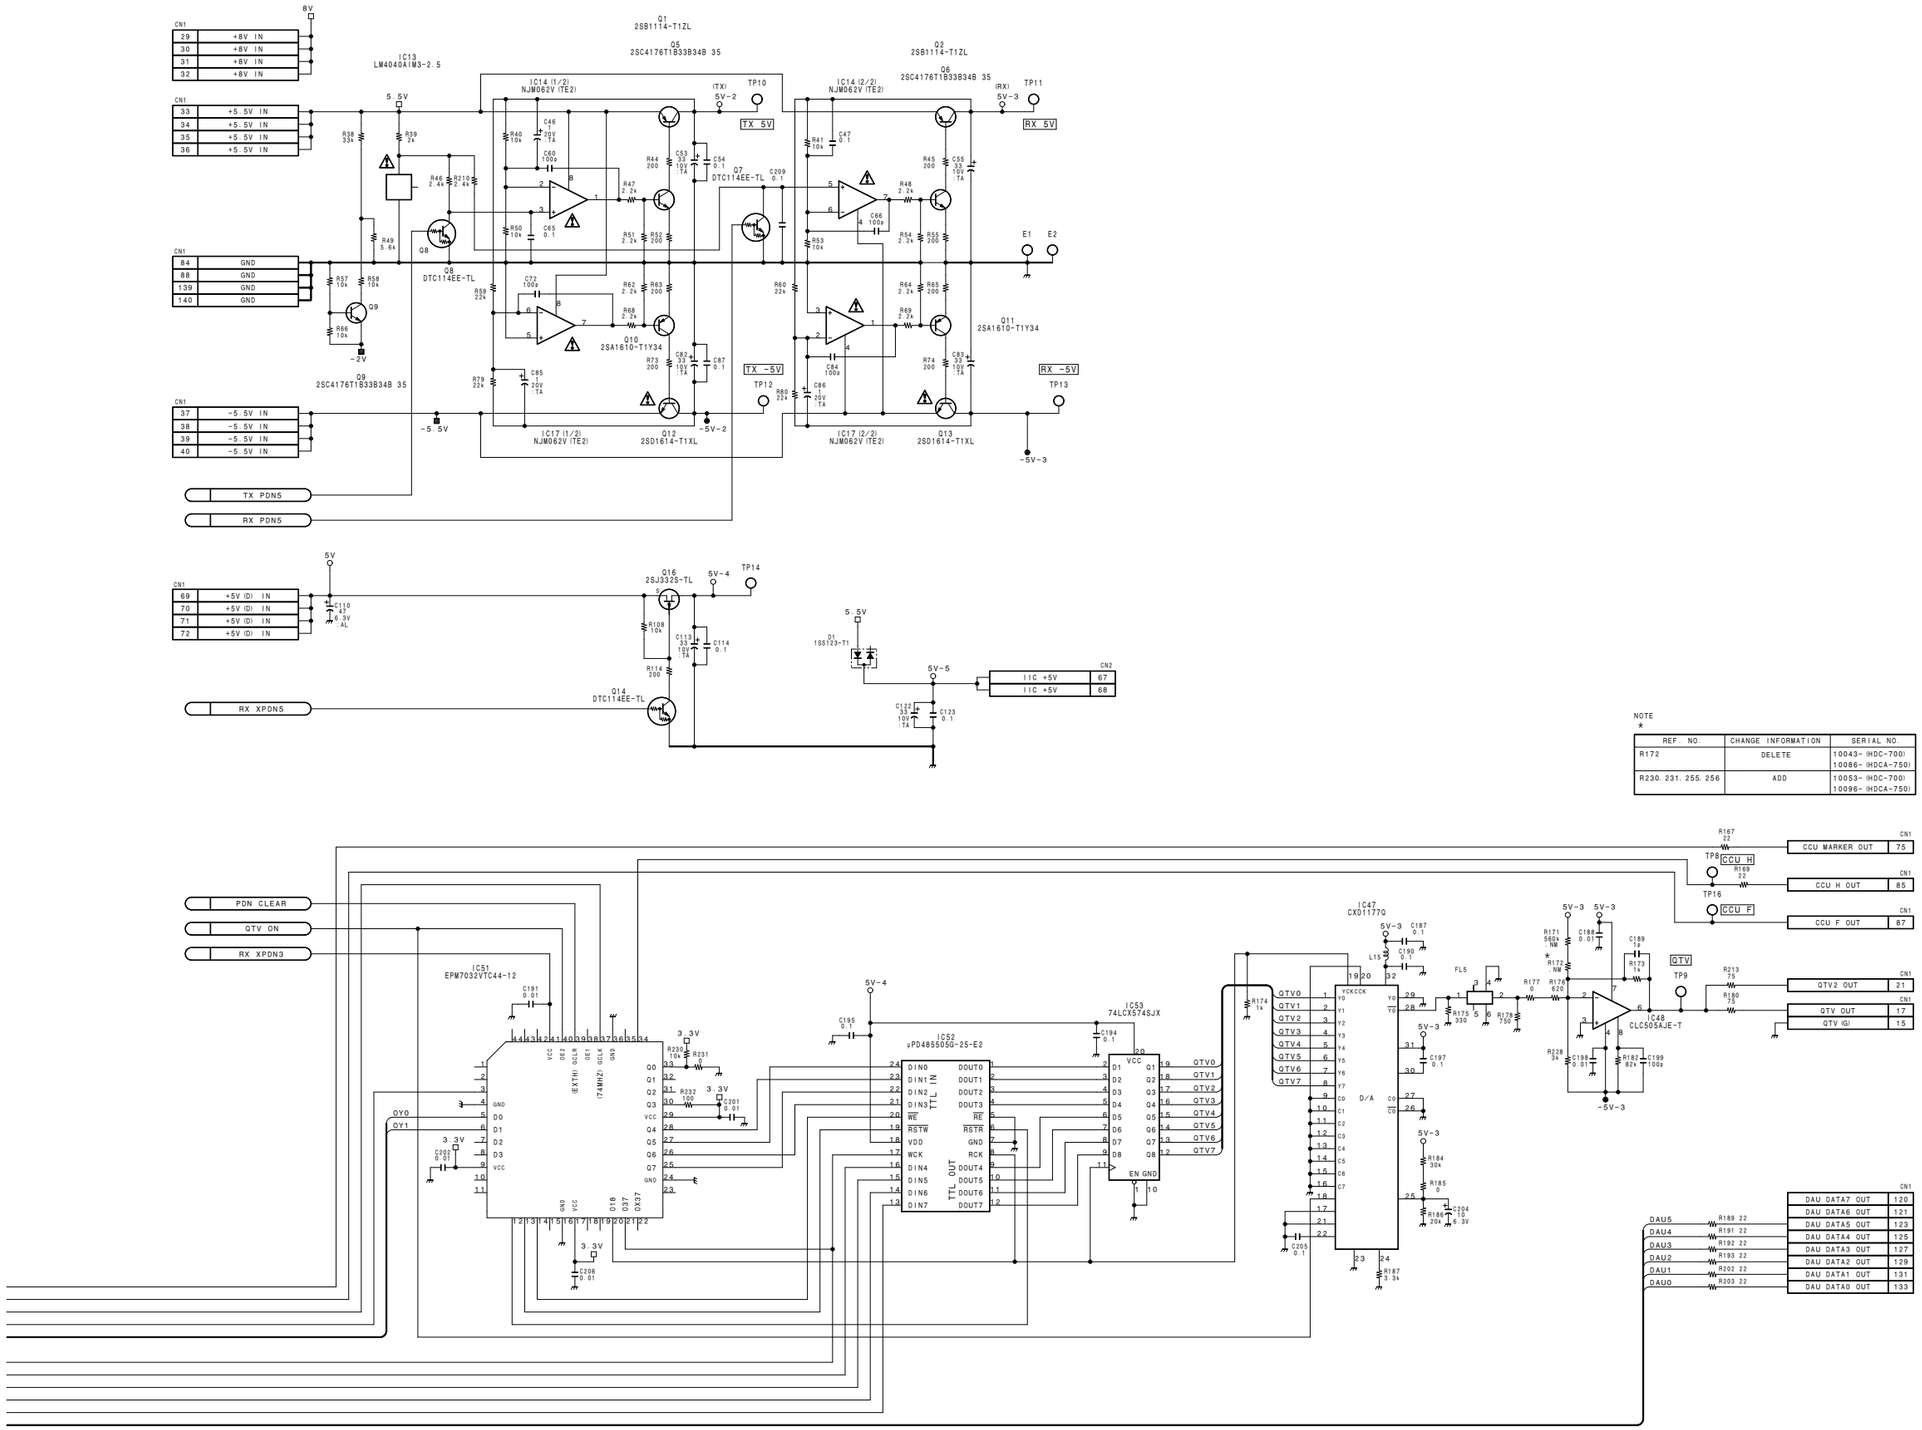

NOTE
*

REF. NO.	CHANGE INFORMATION	SERIAL NO.
R172	DELETE	10043- (HDC-700) 10086- (HDCA-750)
R230. 231. 255. 256	ADD	10053- (HDC-700) 10096- (HDCA-750)

DAD-19 (2/2)

BOARD NO. 1-660-252-11/12
LOT NO. 511-
B-¥HDCA750-DAD19-12

HDC-700 (SY)
HDCA-750 (SY)

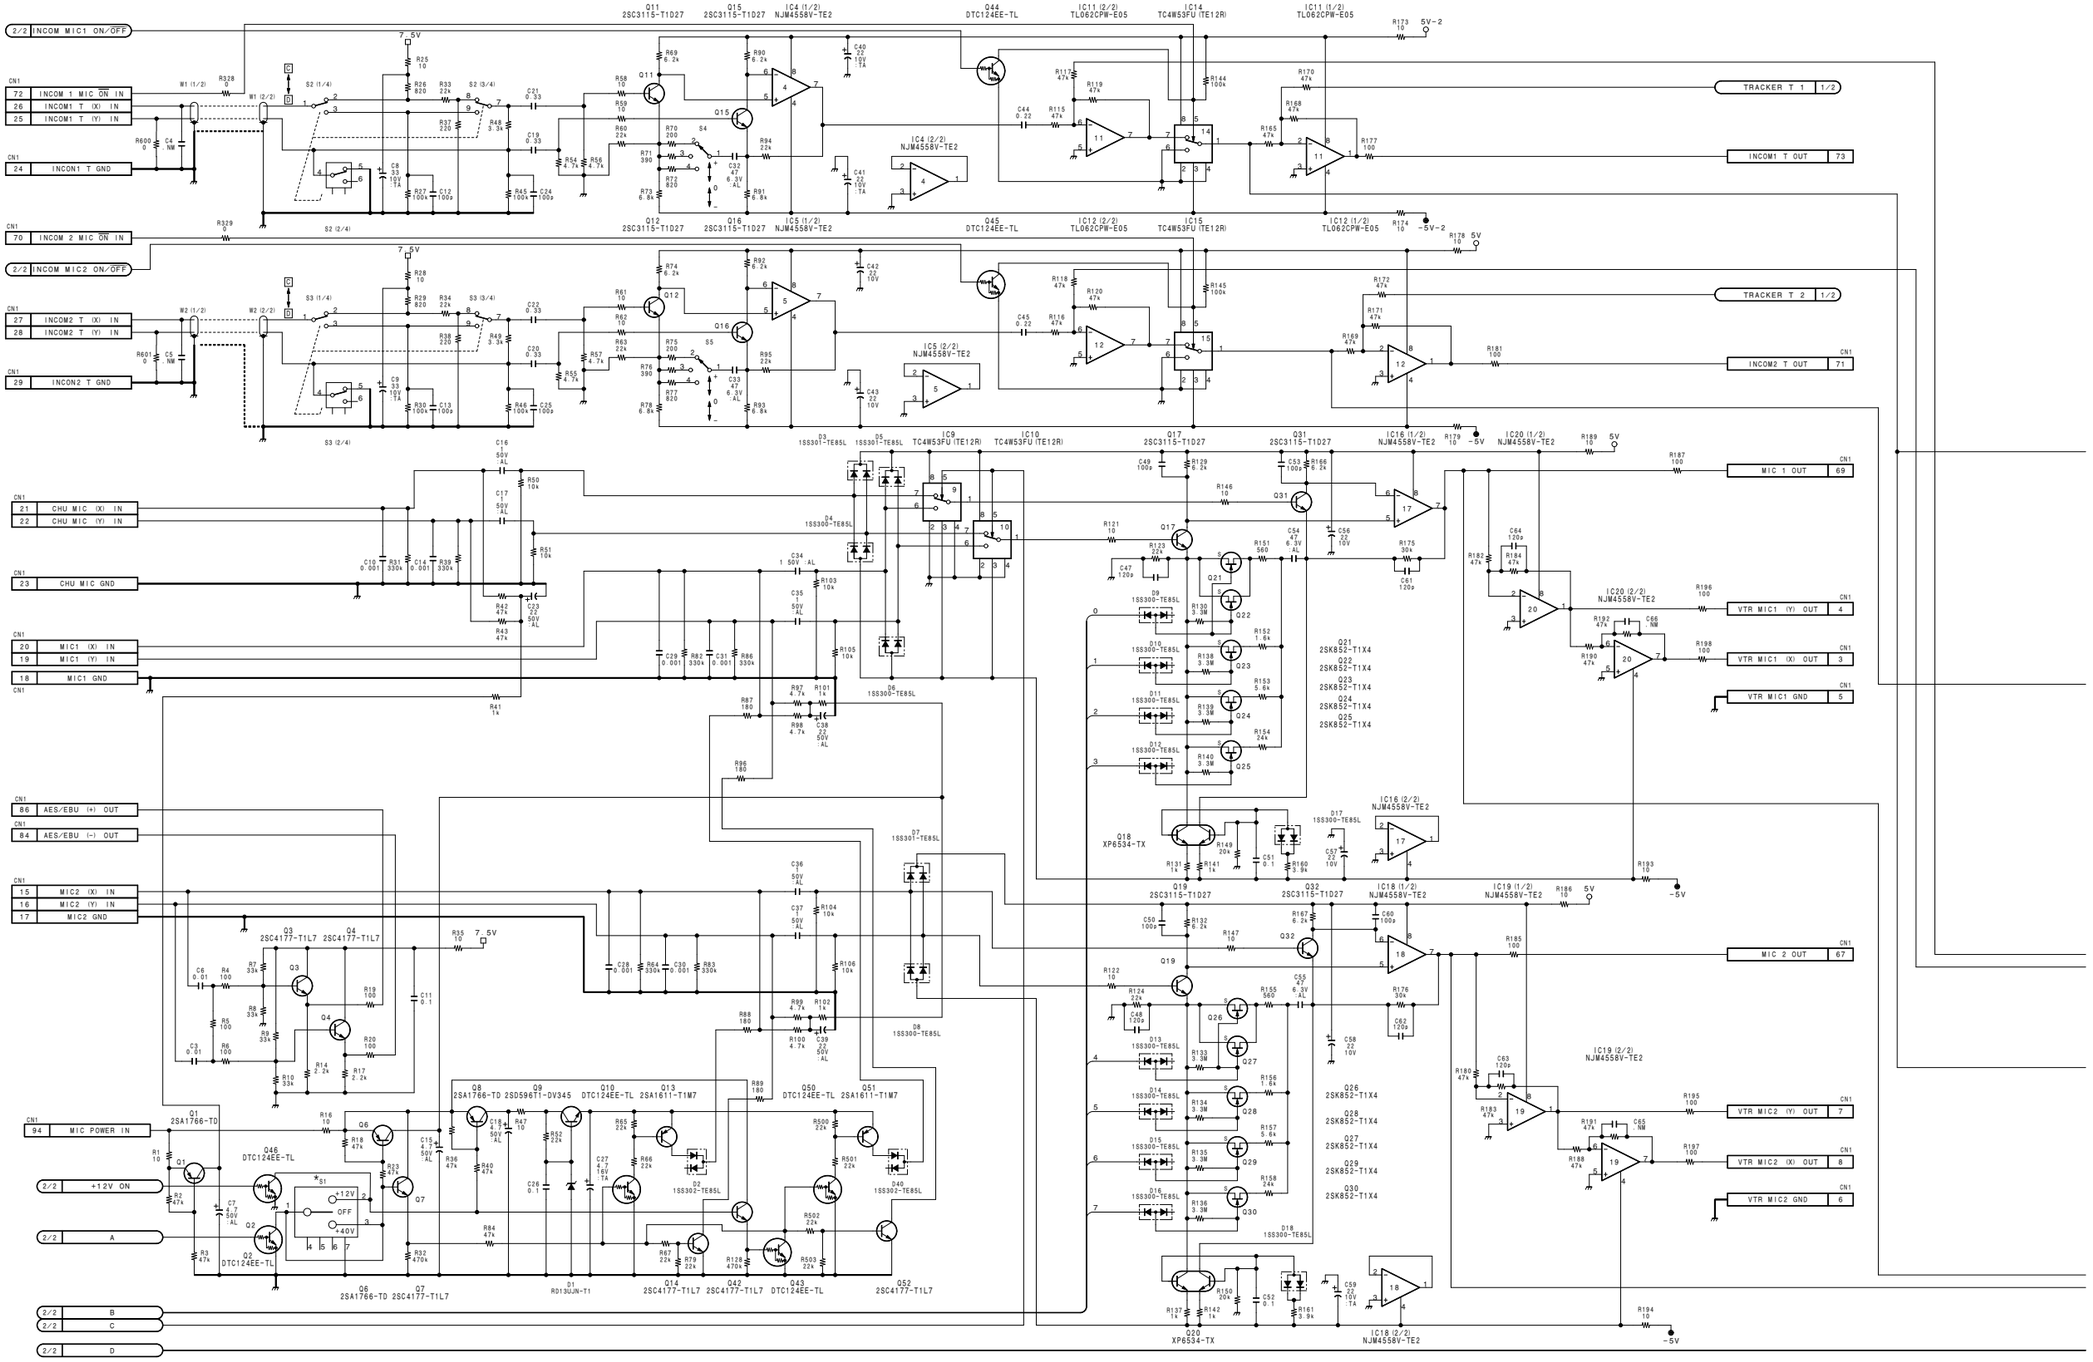

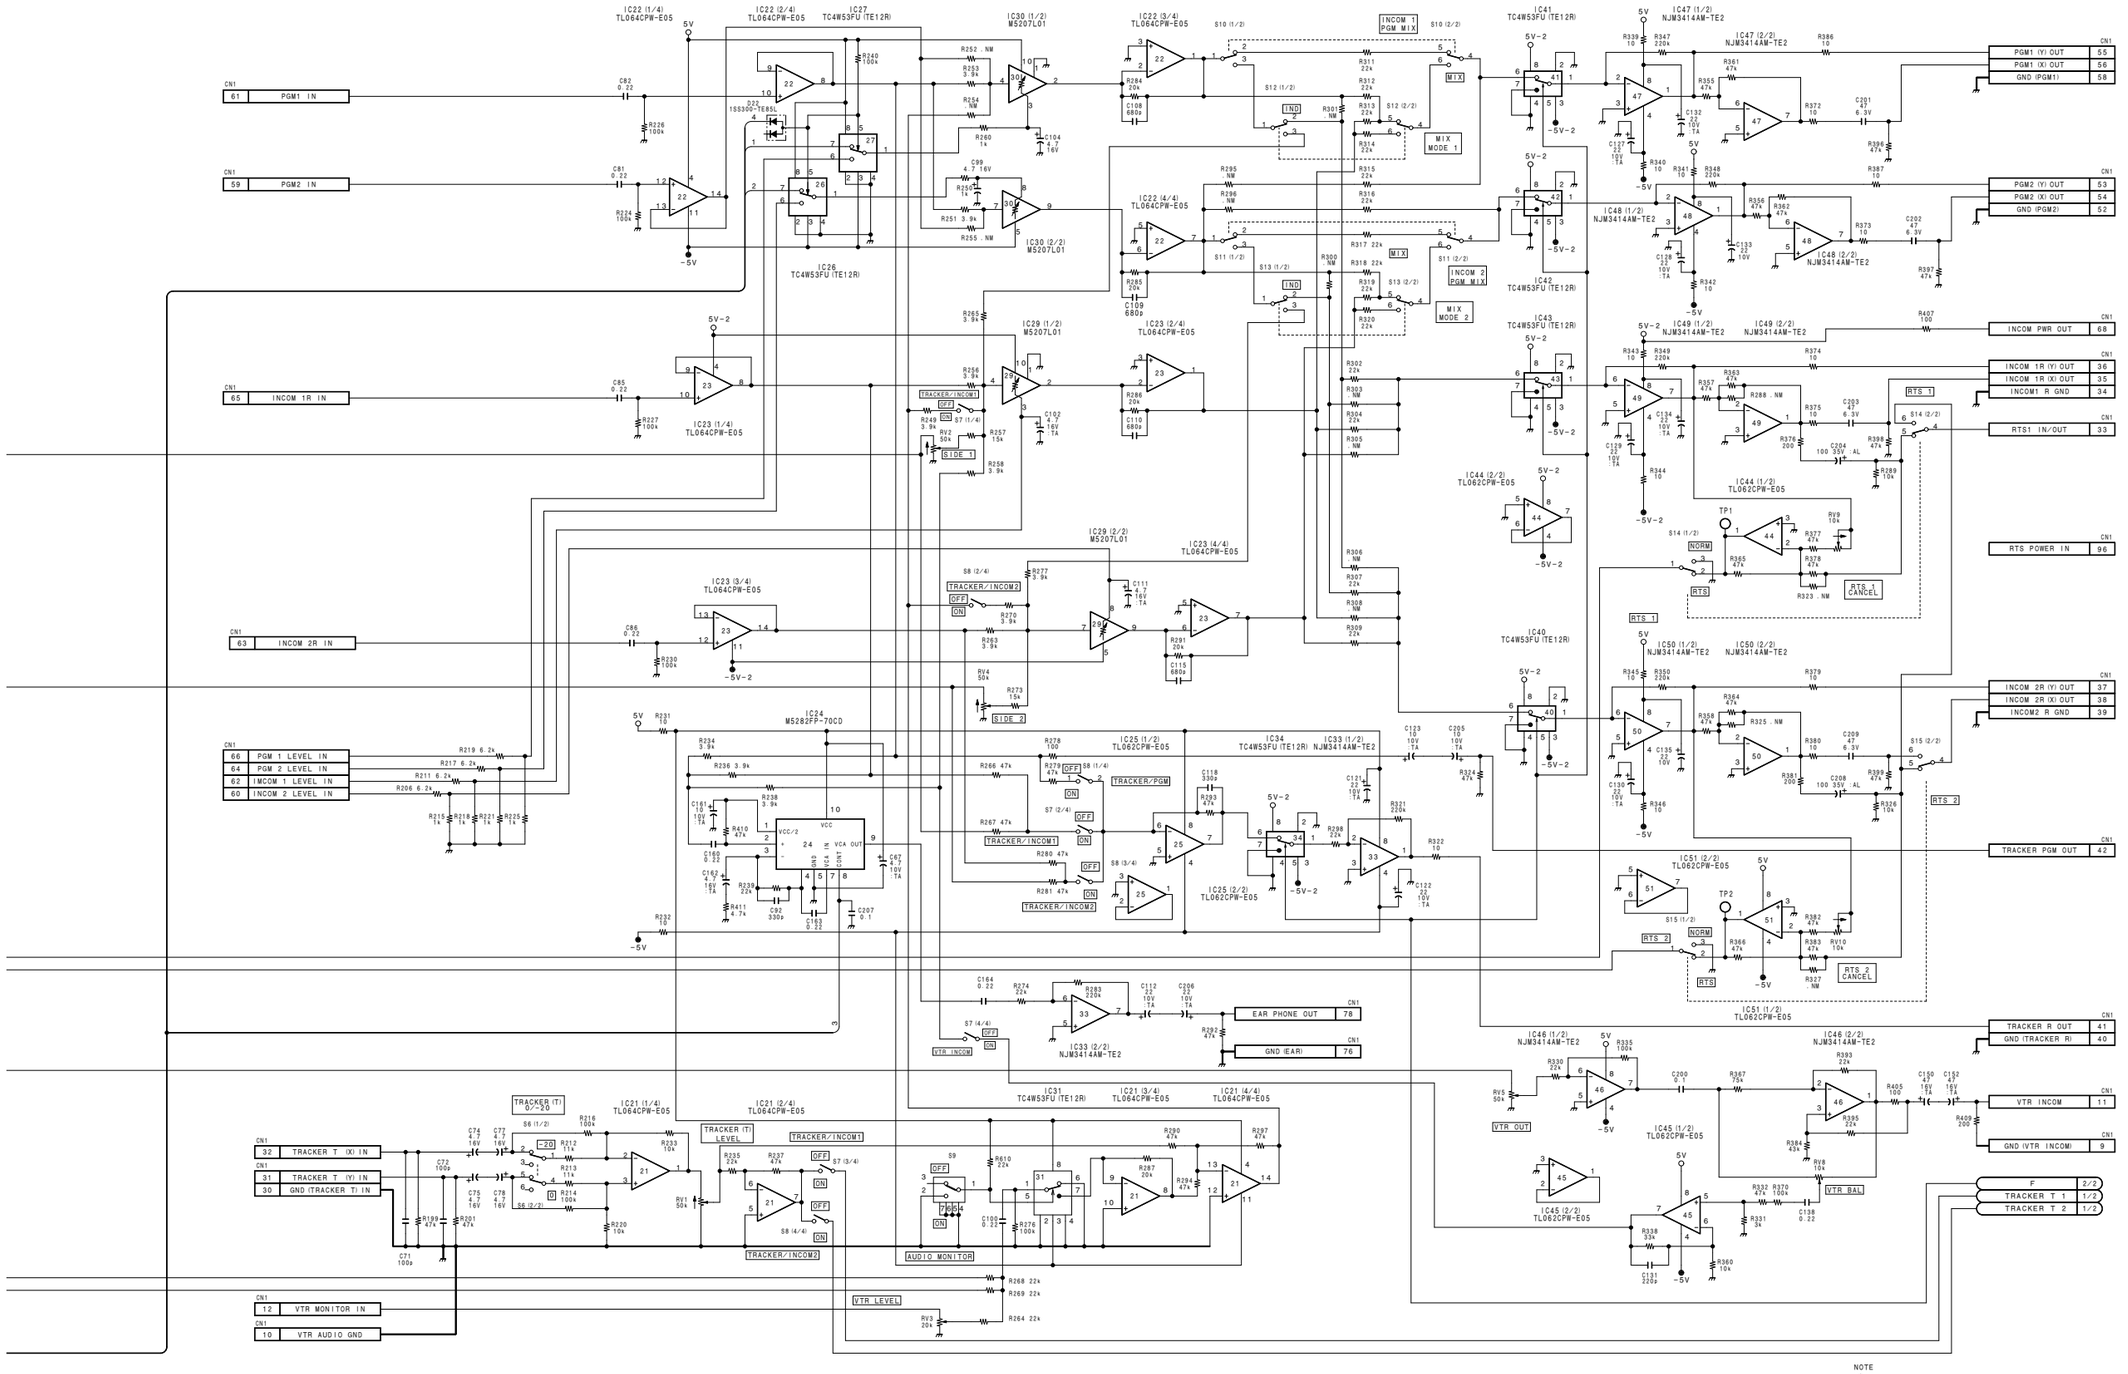

NOTE
*

REF. NO.	CHANGE INFORMATION	SERIAL NO.
S1	DELETE	10078- (HDC-700) 10096- (HDCA-750)

AU-203 (1/2)

BOARD NO. 1-660-244-11/12/13
LOT NO. 511-
B-¥HDCA750-AU203-12

HDC-700 (SY)
HDCA-750 (SY)

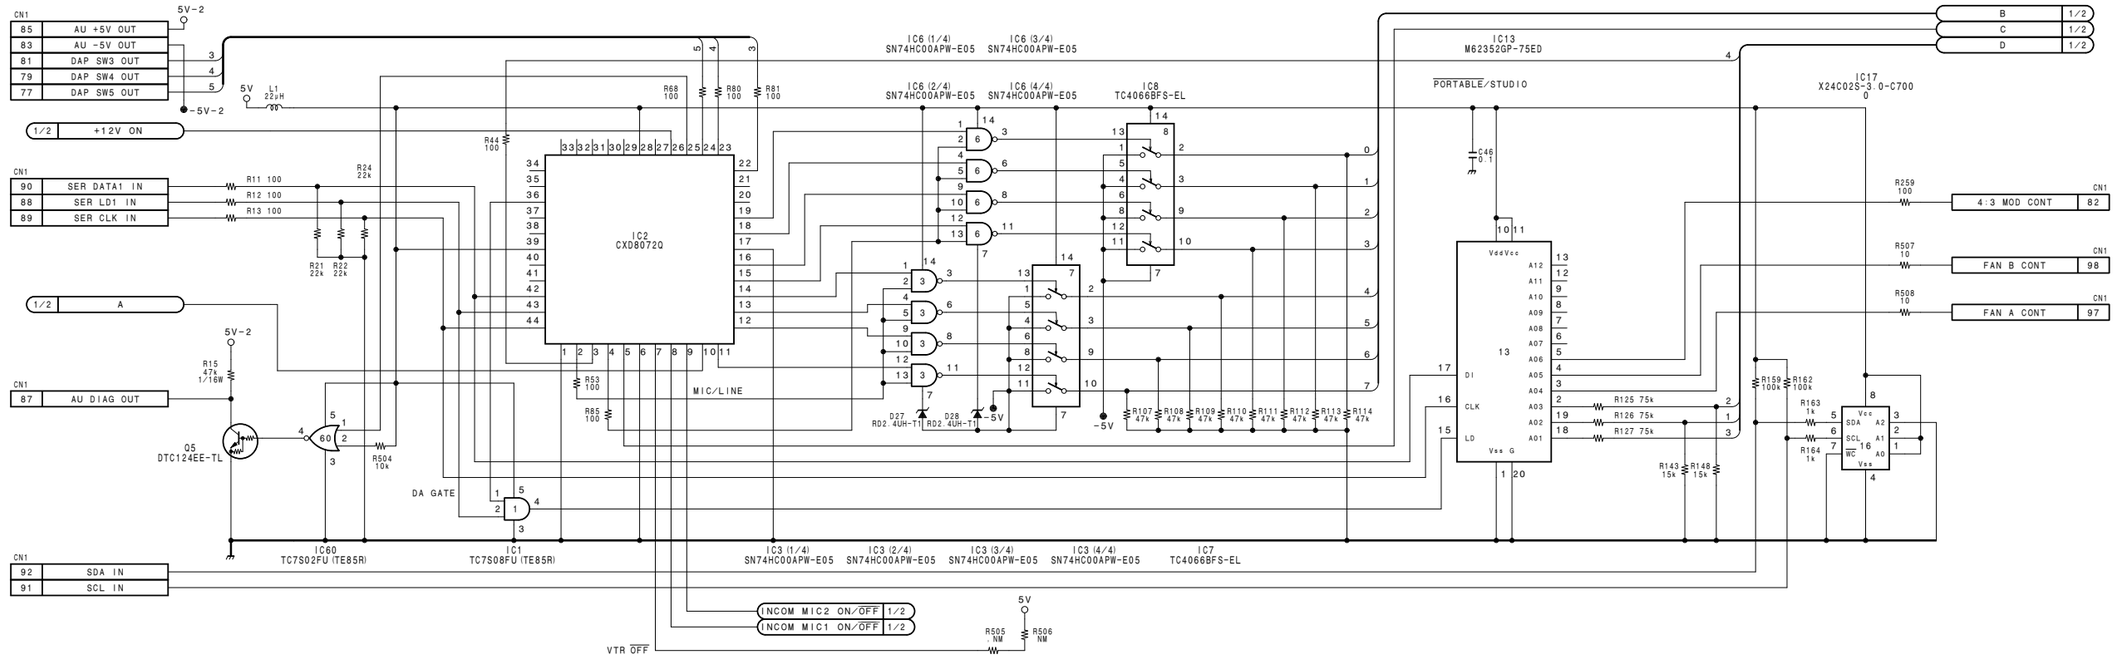

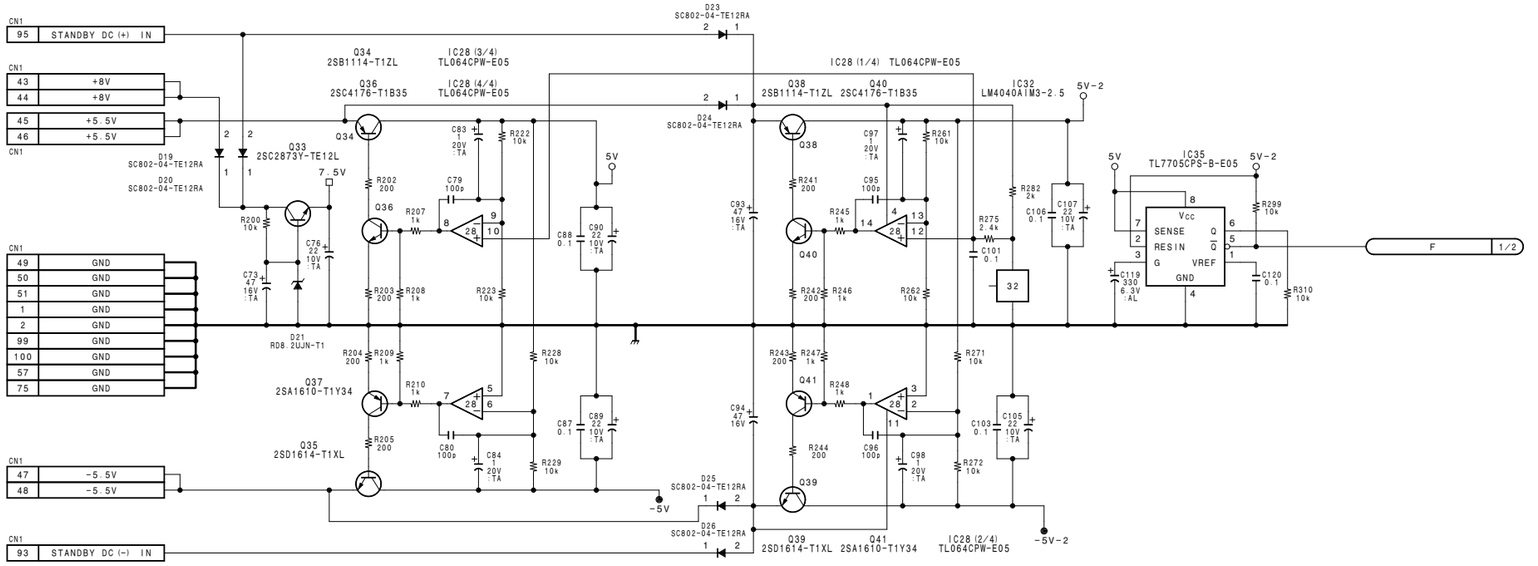

AU-203 (2/2)

BOARD NO. 1-660-244-11/12/13
LOT NO. 511-

B-¥HDCA750-AU203-12

HDC-700 (SY)
HDCA-750 (SY)